




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06K</b>		A2	(11) International Publication Number: <b>WO 97/19415</b>
			(43) International Publication Date: 29 May 1997 (29.05.97)
(21) International Application Number: PCT/US96/18833		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 7 November 1996 (07.11.96)			
(30) Priority Data: 60/006,317 7 November 1995 (07.11.95) US			
(71) Applicant: CADIS, INC. [US/US]; 1909 26th Street, Boulder, CO 80302 (US).			
(72) Inventors: BEALL, Christopher, W.; 679 Cougar Drive, Boulder, CO 80302 (US). MOTYCKA, John, D.; 30130 Chestnut Drive, Evergreen, CO 80439 (US). PENDLETON, Samuel, S.; 976 West Dahlia Street, Louisville, CO 80027 (US). TERPENING, Brooke; 25221 Westridge Road, Golden, CO 80401 (US). NEAL, Michael; 1622 S. Riverbend Lane, Superior, CO 80027 (US). APPELBAUM, Matthew, A.; 200 Pawnee Drive, Boulder, CO 80303 (US).			
(74) Agents: LEACH, Sid et al.; Baker & Botts, L.L.P., 910 Louisiana, Houston, TX 77002 (US).		<p><b>Published</b></p> <p><i>Without international search report and to be republished upon receipt of that report.</i></p>	

(54) Title: SEARCH ENGINE FOR REMOTE OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM

## (57) Abstract

A system is disclosed for remotely accessing database management systems (5130) and performing guided iterative queries of knowledge bases (110) over a communication circuit such as the Internet (5124). The system includes a Web browser (5120) having a Java™ runtime environment (4015), and executable content client (5121) that may be downloaded from a remote location (103). A Krakatoa proxy server (5128), socket (5021) and tunnel (5129) establish a mechanism for remote procedure calls through firewalls (5126) via an HTTP server (5127). Guardrail counts (750) are preferably displayed to the remote searcher to facilitate guided iterative queries of the remote knowledge base (110). A configurable graphical action region (700) is preferably provided to the remote searcher via a graphic user interface to provide powerful navigation and linking of diverse useful information which varies based upon contexts selected by the remote searcher.

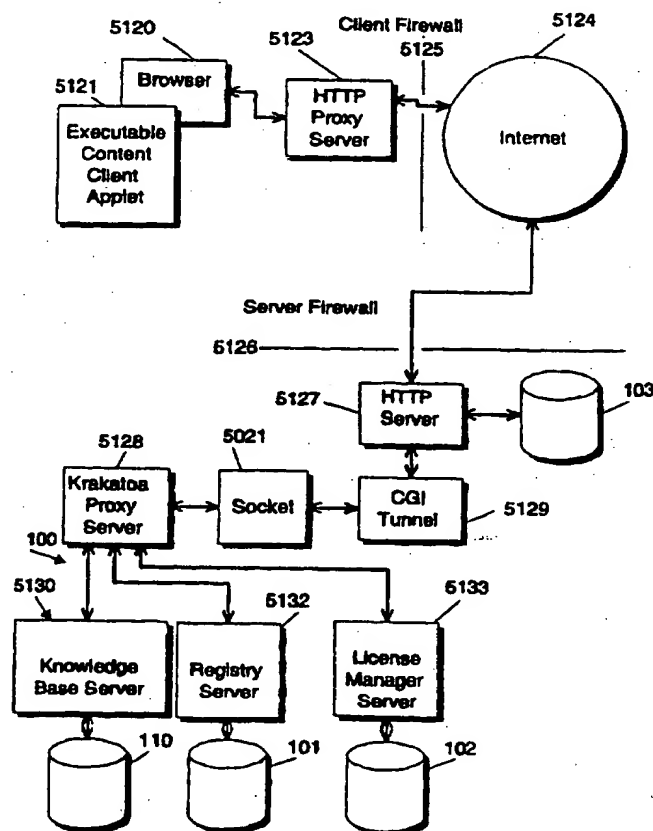

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## Cross-Reference to Priority Application

This application claims the benefit of the priority date of provisional patent application Serial No. 60/006,317, filed November 7, 1995, by Christopher W. Beall, et al., for SEARCH ENGINE FOR REMOTE OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM.

5

## Background of the Invention

In the past, there has been a long felt need for world-wide access to information in a speedy, cost effective and convenient manner. The present invention addresses this need. While the invention will be described herein in connection with an object oriented database management system, certain features and aspects of the invention have broader application.

10

In an object oriented database management system, it is often advantageous to provide access to knowledge base over a communications circuit that has a finite bandwidth. The communications circuit, for example, may be a local area network ("LAN"), a wide area network ("WAN"), or the Internet. Suitable communications circuits can permit access to a knowledge base for remote locations that may be separated by great distances. However, speed is an important consideration that must be adequately addressed in any practical system in order for it to be successful. Although improvements in network protocols and speed have been the focus of much attention, nevertheless networks have limitations on the amount of traffic and the throughput that can be accommodated. Performance may be adversely impacted by delays inherent in moving large amounts of data over such a communications circuit. The performance problems with, for example, the Internet persist even as network transmission speeds and capacity are increased. The Internet may be compared to a multi-lane highway. Increases in speeds may be analogized to raising the speed limit on a highway. Increases in capacity may be analogized to widening the highway to provide more lanes. Yet, the highway may still slow to a crawl during rush hour. The problem is that as quickly as additional lanes can be built, the number of cars using the highway increases just as fast or faster. Similarly, the number of users of the Internet has grown almost exponentially, resulting in an increase in the amount of data that must be transported by the network during a given period of time. Therefore, performance and speed remain important issues that must be addressed regardless of incremental improvements in the speed or capacity of the Internet or other networks.

20  
25  
30

Remote access to a database such as an object oriented knowledge base may be achieved over a communications circuit. It is desirable to provide a system for remote access that provides great flexibility and speed. A suitable search engine and interface are needed for remote access. For example, a need exists for a system that allows an object oriented database

system to be accessed in a manner which permits guided iterative queries at speeds and performance levels that are consistent with cost effective, time efficient and productive use of such data, for example, by engineering and design personnel, and other customers in general. In particular, a search engine is needed to permit guided iterative queries of an object oriented database system over the Internet, in a seamless environment that permits navigation of the World Wide Web (sometimes referred to simply as "the Web") via hypertext links in HTML documents in conjunction with queries of the object oriented database system.

For example, an electronic product may need a series of integrated circuits (IC's) that will boost performance beyond the current design—and beyond the professed operation of a new product that a competitor has just announced. Even if, for example, a supplier such as National Semiconductor has just come out with a new IC that would work, the information concerning such a brand new component available from a supplier would not be found in any of the data books available at the offices of the engineers and designers of the product. Alternatively, at the temperature tolerances a new product needs, the designers and engineers may not be able to find a databook for available components that states exactly how given components of interest will perform. In the past, it was typically necessary to order preliminary data sheets, (which typically are incomplete in nature and sometimes inaccurate), order some samples of components that appeared to be suitable, design them in, prototype the product, test it, and hope that the silicon produced still met what the original specification sheets said. This may consume valuable time, and delay the introduction of a new product.

It is desirable for engineers and designers to get access to this information almost instantly. In the past, searching through catalogs has been cumbersome and time-consuming. Maintaining an up-to-date library of catalogs at the office of the engineer or designer has been relatively costly and time-consuming. Obtaining up-to-date information by calling a sales representative of a supplier has not been entirely satisfactory, and further consumes time. There has been a need to minimize the time required to search for and find each component that is needed for a product design, so that the engineers and designers can get on with the useful work that they need to do to produce a new product.

Engineers and designers need to be able to successively narrow their search for a needed component, and to be able to quickly look for substitutes if they do not find what they originally requested. And they need to have access to any information unique to them as a customer, such as special pricing, delivery times, or even pre-announced components or parts available only to strategic customers. Moreover, engineers and designers have needed access



to such component and design information to be<sup>3</sup> provided at little or no cost, for example, as an extension of their relationship with the vendors of the components.

The above described examples are sufficient to demonstrate that prior art methods have not been entirely satisfactory. However, the present invention has broad application beyond the  
5 limited examples discussed above.

### Summary of the Invention

The present invention involves the use of executable content (for example, Java™ applets) downloadable over a network or a wide area network (such as the Internet or the World Wide Web) to local processing equipment in order to enable interactive search of a  
10 remotely located information repository such as an object oriented database which must be accessed over a communications channel having limitations on bandwidth and throughput.

The present invention may be advantageously used in a database management system to facilitate efficient and speedy remote access to, for example, an object oriented database or schema over a communications circuit having a limited bandwidth or throughput capability.  
15 The present invention reduces or eliminates time consuming transmission of unnecessary digital information over the communications circuit and allows access to information in a database in conjunction with executable applets while providing the ability to navigate and access resources available over the communications circuit.

The present invention provides engineers and designers with the possibility that they  
20 can get direct access to their key supplier's data on-line, via the Internet. Not only is this information typically accessible at any time day or night, but it is data far richer than what is typically published in a static databook, catalog or product brochure. And such information can be absolutely current and up-to-date.

A search engine in accordance with the present invention may be advantageously used  
25 to provide remote access to data, and search capability with guided iterative feedback. Other available resources can be linked via URLs to information in a database, and widely separated and independent information repositories can be effectively tied together seamlessly. The present invention may be advantageously used to provide access over a wide area network, preferably the Internet, to such things as component product data. However, the present  
30 invention is not necessarily limited in application to wide area networks or the Internet, but may also be advantageously applied in local area networks and other client/server systems.

In a preferred embodiment, a user accesses an object oriented knowledge base over a communications circuit such as the Internet. The user has a remote computing or

communication device that may include a navigation program such as a world wide web browser, a runtime environment (such as that provided by Java™), executable content downloaded over the communications circuit from the knowledge base or an associated storage location which is run by an executable content client, which includes an executable content knowledge base retriever. A suitable embodiment may include a knowledge base server connected to a network or coupled to the communications circuit. The communications circuit may typically have one or more knowledge base clients connected to the communications circuit. The knowledge base server is preferably an object oriented database management system that includes a dynamic class manager, a connection manager, a query manager, a handle manager, a units manager, a database manager, and a file manager. An object oriented lock manager may also be included for concurrency control, and is preferably implemented as part of the knowledge base server.

An object oriented database management system in accordance with that described in application Serial No. 08/339,481, filed Nov. 10, 1994, by Thomas S. Kavanagh, et al., for OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM provides a suitable implementation of a system for parametric classification and retrieval. The present invention may be used with such a system to provide access to data in seconds or less, over local area networks, wide area networks, or even over the Internet during nominal traffic periods. There are times when congestion over the Internet can slow the exchange of data significantly. During such periods, the advantages of the present invention in speeding remote access to knowledge bases can be significant. An object oriented database management system, such as that described in application Serial No. 08/339,481, used in conjunction with the present invention may provide the capability of a guided, iterative query over the Internet with virtually instant feedback to a user each time a selection is made, even where the user is located remotely with respect to the database system that is being queried.

Other unique features disclosed include a concept referred to herein as "guardrails." When a searcher navigates to a given class in a hierarchical knowledge base, the attributes of that class are displayed to the searcher. The attributes are constrained by the current values used by the instances of the class. These guardrail attributes are available to be selected and set as search criteria to further refine the search. Attributes that have discrete values can be "guardrailed." For example, attributes that are of a Boolean type, enumerated type, or enumerated set type may be "guardrailed." In the case of a "guardrailed" attribute, guardrail counts are computed for that attribute and are displayed to the searcher.

5  
For a given query, the set attribute selectors that are set as search criteria are examined, and instances that meet current query criteria are used to calculate guardrail counts. The guardrail counts that are displayed to the searcher represent the number of instances having each possible value for the guardrailed attribute that also meet the current query criteria. Thus, the searcher knows immediately, without doing another search, how many instances corresponding to the current query criteria have each value for the guardrailed attribute. This may assist the searcher in avoiding setting search criteria in iterative queries that produce a query result of no instances.

10 Another unique feature disclosed is a concept referred to herein as a "configurable graphical action region." Such a region, preferably built as a configurable graphical action bar, may provide a powerful graphical interface for extended queries. In addition, a configurable graphical action region may be used to provide a powerful graphical user interface to dynamic parameterized URLs. In a preferred implementation, a configurable graphical action bar has action buttons that are configurable so that different parameters will be passed on a remote  
15 procedure call based upon certain events. The action buttons are dynamic so that different extended queries are performed based upon a selection of a class or instance contained in a current query result, providing a configurable, class-dependent query.

Information concerning the Java™ programming language and Java™ scripts has been published by Sun Microsystems. Specifications for the Java™ language appear in J. Gosling,  
20 B. Jay & G. Steele, The Java™ Language Specifications (1996). Additional background information relating to object-oriented databases appears in W. Kim, Introduction to Object Oriented Databases (1990); W. Kim & F.H. Lochovsky, Object-Oriented Concepts, Databases, and Applications (1989); C. J. Date, An Introduction to Database Systems (rev. 1984); and R.G.G. Cattell, The Object Database Standard: ODMG-93 (rel. 1.1 1994).

#### 25 Brief Description of the Drawings

Figure 1 is a schematic diagram which depicts a network environment that is suitable for an embodiment of the present invention.

Figure 2 is a simplified schematic diagram which depicts a communication circuit environment that is suitable for an embodiment of the present invention.

30 Figure 3 is a simplified schematic diagram which depicts an embodiment of the present invention.

Figure 4 is a flow chart showing steps in a process embodying aspects of the present invention.

Figure 5 is a schematic diagram of an embodiment of the present invention.

Figure 6 is a block diagram depicting an overall architecture for a system employing an embodiment of an object oriented database management system.

Figure 7 shows the major components of a computer hardware configuration suitable for a server.

- 5 Figure 8 shows the major components of a computer hardware configuration that provides a suitable platform for a browser that may include an executable content client.

Figure 9 is a schematic diagram depicting the layout of a packet of digital information used by the present invention.

- 10 Figure 10 is a schematic diagram depicting in more detail the layout of the trailer of the packet shown in Figure 9.

Figure 11 is a schematic diagram depicting in more detail the layout of the header of the packet shown in Figure 9.

Figure 12 is a flow chart illustrating a method for starting a new thread.

- 15 Figure 13A is a flow chart illustrating a method for a client connection, including the processing of a call packet, performing a procedure call, and sending of a reply packet.

Figure 13B is a continuation of the flow chart of Figure 13A.

Figure 14 is a flow chart illustrating in more detail a method for signature processing shown in simplified form as step 5029 in Figure 13B.

Figure 15 is a flow chart illustrating a method performed by the CGI tunnel.

- 20 Figure 16 is a flow chart illustrating a method for generating and sending a reply packet.

Figure 17 is a flow chart illustrating a method for generating and sending a call packet.

Figure 18A is a flow chart illustrating a method performed by an executable content client to process reply packets.

Figure 18B is a continuation of the flow chart of Figure 18A.

- 25 Figure 19 depicts an example of a display screen showing information displayed in a window during operation of an embodiment of an executable content retriever client remotely accessing an object oriented database management system.

- 30 Figure 20 depicts an example of a display screen showing information displayed in a window during operation of an embodiment of an executable content retriever client remotely accessing an object oriented database management system, including a dialog window for selecting enumerated attribute information to set search parameters.

Figure 21 depicts an example of a display screen showing information displayed in a window during operation of an embodiment of an executable content retriever client remotely accessing

an object oriented database management system, including a dialog window for entering numeric attribute information to set search parameters.

Figure 22 depicts an example of a display screen showing information displayed in a window during operation of an embodiment of an executable content retriever client remotely accessing an object oriented database management system, including a dialog window for entering character or text attribute information to set search parameters.

Figure 23 depicts an example of a display screen showing an instance display window that opens when the "display" tab shown in Figure 22 is selected to show information about the instances returned which met the search parameters entered by the user.

Figure 24 depicts an example of a display screen showing an item information window displaying detailed information about an instance which may be opened by clicking an "information" button shown in Figure 23.

Figure 25 depicts an example of a display screen showing information displayed in a class name dialog window which opens when a user clicks on the "find" button shown in Figure 19.

Figure 26A is a schematic diagram of a class hierarchy in a parts knowledge base and a vendors knowledge base.

Figure 26B is a schematic diagram of certain attributes stored in the parts knowledge base depicted in Figure 26A.

Figure 26C is a schematic diagram of certain attributes stored in the vendors knowledge base depicted in Figure 26A.

Figure 27 is an example of a screen display for an extended query wizard.

Figure 28 is an example of a screen display for an extended query wizard.

Figure 29 is an example of a screen display for an extended query wizard.

Figure 30 is an example of a screen display for an extended query wizard.

Figure 31 is an example of a screen display for an extended query wizard.

Figure 32 is an example of a screen display for a URL wizard.

Figure 33 is an example of a screen display for a URL wizard.

Figure 34 is an example of a screen display for a URL wizard.

Figure 35 is an example of a screen display for a URL wizard.

Figure 36 is an example of a screen display generated by an executable content retriever client showing guardrails.

Figure 37 is an example of a screen display generated by an executable content retriever client showing a configurable dynamic action bar.

Figure 38 is an example of a screen display generated by an executable content retriever client showing a configurable dynamic action bar.

Figure 39 is an example of a screen display generated by an executable content retriever client showing a configurable dynamic action bar.

- 5 Figure 40 is an example of a screen display generated by an executable content retriever client showing a configurable dynamic action bar.

Figure 41 is an example of a screen display generated by an executable content retriever client showing a configurable dynamic action bar.

Figure 42 is an example of a screen display generated by an executable content retriever client.

- 10 Figure 43 is a flow chart depicting a process for building a configurable dynamic action bar.

Figure 44 is a flow chart depicting a process for displaying guardrails.

Figure 45A is a flow chart depicting a method used in building guardrails.

Figure 45B is a continuation of the flowchart shown in Figure 45A.

Figure 45C is a continuation of the flowcharts shown in Figures 45A and 45B.

- 15 Figure 46 depicts an example of a screen display shown when navigating a schema by opening and selecting classes.

Figure 47 depicts an example of a screen displayed when adding a part to the schema.

Figure 48 depicts an example of a screen displayed when editing a part.

Figure 49 illustrates a screen display for an embodiment showing a schema developer window.

- 20 Figure 50 illustrates a screen display for an embodiment showing an example of a search results window.

Figure 51 depicts a display screen showing information displayed in an example of a parts editor window.

Figure 52 shows the internal object representation for a class.

- 25 Figure 53 depicts an example of a generic list.

Figure 54 illustrates the data structure for attribute data.

Figure 55 illustrates a data structure for an enumerator object.

Figure 56 depicts the data structure for an instance and associated parameters.

- 30 Figure 57 shows the data structure for five different types of parameters: enumerated, Boolean, numeric, string and string array.

Figure 58 is an example of a schema with instances.

Figure 59 depicts a data structure for an example of a unit family.

Figure 60A is a flow chart depicting a method for adding a class to a schema.

Figure 60B is a continuation of the flow chart in Figure 60A.

### Detailed Description of a Preferred Embodiment

Virtually every company in business today must provide information on their products to their customers. While at the same time, potential customers seek information on the products they must purchase. In practice, few purchases are based on the physical item, but rather upon the information about the item (i.e., goods or services) offered for sale. A need has long existed for such information to be provided to potential customers in a manner where the information is easy to find and access, accurate, up-to-date, and complete.

Yet in today's traditional business model, almost all product information is provided in verbal or hardcopy form. It is exchanged as telephone calls, catalogs, spec sheets, and sales visits. It is expensive for the suppliers. And it is frustratingly cumbersome, incomplete, and time-consuming for the customer. The present invention may be utilized to provide quick and easy access to accurate, up-to-date, and complete information even over a limited bandwidth communication channel such as the World Wide Web.

In accordance with the present invention, information may be disseminated over a network such as the World Wide Web in a manner where the information is quickly and intuitively accessible so that potential customers can easily find what they're looking for. The present invention further provides the capability of supplying potential customers with more than a simple description of a product or service. Potential customers may view two-dimensional images of a product, they may navigate around three dimensional images of the product, they may hear it, they can observe simulations of the product, either alone or in custom configurations. Potential customers may be provided with access to product information, pricing information, availability information, and competitive information. Sufficient information may be provided for the customer to make an informed purchase decision.

For example, a semiconductor manufacturer could publish its entire product content on the Web for the benefit of its customers, using present invention. The semiconductor manufacturer's customers would be able to quickly search the manufacturer's entire product line for components that fit the customer's design requirements, by doing guided iterative queries of the data using the attributes or parameters of the components needed for a pending design. The customer could then download a wealth of information on the components of interest. The information made available could include circuit simulations that plot performance data for particular operating conditions. The operating conditions could be

changed, different components could be substituted, and the simulation could be rerun as many times as the customer desired to do so. With the present invention, the exchange of information is greatly facilitated.

Application Serial No. 08/339,481, filed Nov. 10, 1994, by Thomas S. Kavanagh, et al.,  
5 for OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM, describes parametric search technology and legacy processing methods, which may be used, for example, to provide parts information management systems. Large discrete manufacturing companies typically manage hundreds of thousands—often millions—of parts, and incur enormous expense in creating and maintaining those parts. The object oriented database management system  
10 described in application Serial No. 08/339,481, may provide virtually instant parametric access to a company's parts data, without the need for a part number or text description of the parts. The legacy processing methods provide the ability to extract parametric attributes from widely scattered, often inconsistent parts data that has been accumulated over years of history.

There are a number of hindrances to effective use of the World Wide Web for  
15 interactive use, arising from the fact that the basic unit of interaction is a document written in HTML (Hypertext Markup Language). Each user input requiring a response from a service available on the Web in an HTML mediated environment requires the creation and downloading of a fresh HTML-document to the user's Web browser. This leads to the need to create, keep track of, and clean up many interim documents representing each step of the user's  
20 interaction with a service. In addition, the need to download the entire interim HTML document at each step places serious performance limitations on the use of this mechanism for interactive applications.

Achieving acceptable performance levels in the application of the present invention requires careful attention to the use of resources available to the executing agent or module. In  
25 this case, one of those resources is network bandwidth. Since the bandwidth of the network is finite, it makes reasonable sense to want to be conservative about its use. However, there are other reasons to want to do so. Client/server applications used on the Internet can involve considerable distances between a client and a server. This is complicated by the fact that as the distance increases, so does the probability that a communication packet that is moving between  
30 the client and the server will encounter delays caused by other network traffic.

Client applications usually require server data to present through an interface to the user. Normally the only mechanism they have to acquire this data is through programming interfaces provided by the server. If the programming interfaces are constructed in such a way



//  
that the client application is required to make several server calls in order to satisfy the user's request, then the response time to the user is the summation of the round trip delays experienced for all of the calls. For long distance operations, such as those operating via the Internet, delays generated by a multi-call architecture can sometimes aggregate to many  
5 minutes.

For the architecture described and illustrated herein, this problem has been circumvented by architecting the data structures such that a client can receive information from a server in one client/server exchange, or one remote procedure call.

These problems only get worse when the HTTP protocol must be used as a transport  
10 mechanism between a client and a server. The HTTP/1.0 protocol requires that the client connect to the server, transfer the request data, and receive the response, which is all followed immediately by a disconnection. To establish new connections, network protocols must determine a route to be used for communication between the client and the server. Once routing information has been determined, it is typically stored, and the client and server will  
15 use the predetermined routing information to establish the route for communications.

Applications which require many exchanges to satisfy user requests can be plagued by response time problems in the best of network scenarios. When the transport mechanisms require many additional connections to be established to provide a requested service, the problem gets orders of magnitude worse. The present invention achieves advantages over the  
20 prior art by combining multiple functions or requests into a single connection communication, under circumstances that would otherwise require multi-connection communication using conventional methods.

The present invention makes use of a Web browser with a capability of executable content. Java™, a language and runtime system distributed by Sun Microsystems, may be used  
25 as a suitable mechanism for the creation of executable content. A suitable Web browser including a capability of executable content that may be employed in connection with the present invention is Netscape Navigator™, version 3.0 or higher. Other suitable Web browsers include Microsoft's Internet Explorer™, version 3.0 or higher. It is believed that almost any web browser that is Java-enabled would be suitable. Rather than simple interaction consisting  
30 of the creation and downloading of HTML documents, a navigation client, such as a Web browser including a capability of executable content such as Java™, may allow the creation of application programs, called "applets," that run directly in the Java runtime environment provided within the browser. These applets may be distributed as architecturally neutral

program units expressed in bytecodes that execute against a virtual computer implemented by the Java runtime environment.

A particular type of especially advantageous interactive application, performing guided iterative queries of an object oriented knowledge base, can be implemented using a system comprising the following elements:

1. an object oriented data base management system server;
2. a World Wide Web browser or other runtime program capable of managing executable content;
3. a client application written as executable content, capable of running in the browser as part of a runtime environment;
4. a remote procedure call mechanism written as executable content, capable of running in the browser or runtime environment; and,
5. an interface mechanism on the server side capable of translating received remote procedure calls into actual calls to the object oriented database management server.

Figure 2 is a simplified schematic diagram which depicts a communication circuit environment that is suitable for explaining the structure and operation of an embodiment of the present invention. In the illustrated example, a communications circuit 4000 having a finite throughput capability and bandwidth limitations is provided. For example, the communications circuit 4000 may be a local area network or a wide area network. The network 4000 may comprise one or more networks that employ an ATM protocol, Ethernet, token ring, FDDI, or other suitable implementation of a digital communications system. In the illustrated embodiment, the communications circuit 4000 is the Internet. Although the communications circuit 4000 has a finite throughput capability and bandwidth limitations, the present invention will operate satisfactorily over a communications circuit that has no such limitations. It will be appreciated by those skilled in the art that a significant advantage of the present invention is that it is capable of operating with fast response times and that it provides good performance over communications circuits that have such limitations.

In Figure 2, a knowledge base server 4001 is shown connected to the communications circuit 4000. The knowledge base server 4001 maintains a database or knowledge base, preferably an object oriented knowledge base 4002. In the illustrated embodiment, the knowledge base server 4001 has a TCP/IP connection 4005 to the Internet 4000, although the present invention is not necessarily limited to any particular type of connection or protocol.

A plurality of user client applications 4003 and 4004 are connected to the communications circuit 4000. The user client application 4003 comprises a client operable to navigate network resources connected to the communications circuit 4000, such as the knowledge base server 4001. In the illustrated embodiment, the user client application 4003  
5 comprises a web browser 4003, and is connected to the Internet 4000 via a TCP/IP connection 4006. The web browser is preferably capable of retrieving HTML documents from servers (not shown) connected to the Internet.

Figure 3 is a simplified schematic diagram showing a suitable architecture and an example of a search engine using the present invention. A user's computer 4018 is shown  
10 running a web browser 4014. The web browser 4014 includes a capability for executable content, such as a Java runtime environment 4015. A web server 4010 in this example includes an HTML document 4011 that contains a reference (such as hypertext link) to a searchable knowledge base 4012. The browser 4014 may be used to navigate the Web and to retrieve the HTML document 4011. By clicking (using, for example, a mouse 117) on a  
15 hypertext link to the knowledge base 4012, the user connects via the Internet 5124 and invokes the HTTP server 4010 which downloads Java class files 4017 which, when downloaded, become executable content 4016 in the Java runtime environment 4015.

Thus, in accordance with one aspect of the present invention, executable content 4016 from storage 4017 on a serving computer 106 is transferred to a client computer 4018 and runs  
20 as an executable content retriever client 4016. Then, executing appropriate procedure calls, the executable content knowledge base retriever 4016 performs searches, including guided iterative queries, of an object oriented knowledge base 4012, and a graphical representation of the results are visible to the user on a display 116. In accordance with a preferred embodiment of the present invention, guided iterative queries of an object oriented knowledge base 4012 may  
25 be performed via the Internet 5124 and displayed on a user's display 116 in significantly less time than was possible in the past using conventional techniques. It will be appreciated by those skilled in the art that this is a significant advantage of the present invention.

Access to knowledge base servers 4013 is preferably accomplished using a proxy server 5128. In a preferred embodiment, the HTTP server 4010 communicates with the proxy server  
30 5128 via tunnel 5129 in a manner which is described more fully below. In the illustrated embodiment, the proxy server 5128 and the HTTP server 4010 are advantageously located on the same serving machine 106. For performance reasons, the database servers 4013 and knowledge base 4012 are preferably located on a separate machine 4019, but there is no

requirement that they be implemented that way. In addition, although a mouse 117 is a preferred input device in the illustrated example, a user may alternatively use other devices such as a keyboard 122 for input.

Figure 4 is a flow chart showing steps in an overall process that may be performed according to the embodiment illustrated in Figure 3. Referring to Figure 4, a user interacts with an executable content capable web browser in step 4100, and chooses to search a knowledge base 4002 in step 4101. This choice in step 4101 results in the automatic download of executable content or an applet 4017 in step 4102 which may become the client side of the retrieval application 4016. The retriever client 4016 opens connection to the knowledge base server using executable content based remote procedure calls in step 4103. The retriever client 4016 opens the knowledge base server 4013 in step 4104. In step 4105, the user interacts through a graphical user interface embodied in the client retriever 4016 to navigate a class hierarchy of the associated knowledge base 4012, set attribute query selectors, display matching instances, and run other executable content associated with classes, attributes, standard values of attributes, and instances.

Referring to Figure 4, in step 4106, when finished, the user closes the knowledge base 4002. In step 4107, the knowledge base server 4001 closes connection to the user's retriever client 4003, returning control to the Web browser 4014.

For example, an electronics design engineer may need to find an integrated circuit to meet a requirement in a design. He knows the type of device and its operating characteristics, and also knows that his company prefers to use parts from National Semiconductor. For example, assume that the designer needs a standard linear analog buffer amplifier. Using an executable content capable Web browser 4014 such as Netscape Version 3.0, he may connect to a National Semiconductor Web site over the Internet 5124 and begin browsing at the site. In this example, this site has a hyperlink for parts search and document retrieval. The user clicks on the hyperlink, resulting in the download of a Java application (applet) 4017 that begins executing in the Java runtime environment 4015 within the Netscape browser 4014. The user is presented with a graphical display on his display screen 116.

Figure 19 illustrates an example of a display on the user's display screen 116 when the user is remotely accessing an object oriented knowledge base 4012 via the Internet 5124 using an executable content retriever client 4016. The executable content retriever client 4016 displays a search results window 4020. The search results window 4020 includes a search tab 4021 and a display tab 4022. Either the search tab 4021 or the display tab 4022 may be

selected by the user. The illustrated example shown in Figure 19 shows the appearance of the search window 4020 when the search tab 4021 has been selected. Clicking on the search tab 4021 reveals an outline based hierarchical display of classes of integrated circuits 4023 in the left-hand portion 4023 of the window 4020.

5 In a preferred embodiment, the user may employ guided iterative queries to find the needed integrated circuit. The search window 4020 may initially display only the root class 4038 in the knowledge base 4012, or may alternatively display a first level of classes, such as the "communications" class 4031, the "digital logic" class 4032, the "discrete semiconductor devices" class 4033, etc., including the "analog/linear" class 4027. The user clicks on the  
10 "analog/linear" class 4028 to open it, which causes the executable content retriever 4016 to display the "standard linear" class 4027, and other classes on that same level, such as the "audio" class 4034. The user clicks on the "standard linear" class 4027 to open it, thereby causing the display of the "amplifiers & buffers" class 4026, the "regulators" class 4035, and other classes on that same level. By clicking on the "amplifiers & buffers" class 4026, the user  
15 opens it to display the "buffers" class 4024 and the "operational amplifiers" class 4036. The user selects the "buffers" class 4024 by clicking on it, and that class is displayed as a highlighted representation 4024 as shown in Figure 19.

At each step of the process of navigating the hierarchical display of classes 4023, the user is presented with an "items found" count 4037. In the example shown in Figure 19, the  
20 items found count 4037 is sixty-six, indicating that the currently selected "buffers" class 4024 contains sixty-six instances.

The right-hand portion of the window 4020 is a attribute display window 4025. In this object oriented knowledge base 4012, attributes are inherited by classes 4024 from a parent class 4026. For example, the "buffers" class 4024 will inherit attributes from its parent class  
25 "amplifiers & buffers" 4026, such as a "voltage gain" attribute 4029. The parent class "amplifiers & buffers" 4026 will, in turn, inherit attributes from its parent classes: the "analog/linear" class 4028 and the "standard linear" class 4027, such as the "part number" attribute 4030. The "buffers" class 4024 may also have additional attributes that are not inherited.

30 The user navigates the class hierarchy 4023 to the class 4024 of integrated circuit that is required. In this case, the user is interested in finding a standard analog linear buffer amplifier. The user can, at anytime, also set search parameters for attributes 4039, 4029 appropriate to the currently selected class 4024 within the hierarchy 4023. For example, Figure 20 illustrates an

example of setting search parameters for an enumerated attribute 4039, which in the illustrated example is a "package type" attribute 4039. A predetermined type of icon 4040 is displayed to the user to indicate that this attribute 4039 is an enumerated attribute. The user clicks on the icon 4040 associated with the "package type" enumerated attribute 4039 to select it, which  
5 opens a dialog window 4041 displaying the possible values for this enumerated attribute 4039.

The user may click on any one of the enumerated attributes displayed in the dialog window 4041 to select the attribute. If the number of enumerated attributes are too great to display all of them in the dialog window 4041 at the same time, a scroll bar 4042 may be used to bring additional attribute values into view. By holding down the "Control" key on his  
10 keyboard 122 while he clicks with his mouse 117, the user may simultaneously select several of the enumerated attributes to be used as search parameters. In the illustrated example, the user has selected "package type" attribute values of "ceramic flatpack" 4045, "cerdip" 4046, and "N/A" 4047. The "N/A" value 4047 is given to any instance that does not have an indicated value for the enumerated "package type" attribute, which may often result when  
15 existing legacy data is converted to a different knowledge base format. The user may conveniently deselect all of the selected attribute values (for example, if he wants to change his search) by clicking on a clear button 4043 in the dialog window 4041.

Once the user has selected the values 4045, 4046 and 4047 that he wishes to use for the enumerated attribute 4039 in his search, he clicks on an "apply" button 4044 in the dialog  
20 window 4041. After the apply button 4044 is clicked, the selected values 4045, 4046 and 4047 for the enumerated attribute 4039 are displayed in the attribute value display window 4048 associated with that enumerated attribute 4039. In addition, the parts found count 4037 is updated to reflect the results of the search. In the illustrated example shown in Figure 20, thirty-six instances conform to the applied search criteria.

25 Other types of attributes may be used to set search criteria to zero in on a desired part that satisfies a user's design requirements. For example, Figure 21 shows the numeric attribute "bandwidth" 4049 being used to set search parameters. The "bandwidth" attribute 4049 is identified for the user as a numeric attribute with a numeric type icon 4051 which appears next to the attribute 4049. When the user clicks on the numeric icon 4051, a dialog box 4050 opens  
30 to allow the user to specify a range to be used as a search parameter. In the illustrated example, the user may use the dialog box 4050 to specify that the bandwidth attribute 4049 should have a value between ten MHz and ten thousand MHz by entering those values in a first range specify window 4052 and a second range specify window 4053, respectively. The units are

expressed in a units window 4054. When the user clicks an "apply" button 4055, the indicated range is applied as a search parameter for the bandwidth attribute 4049, and in this example, the modified search parameters reduce the items found count 4037 to thirty-three. When the user clicks the apply button 4055, the range used in the query will be displayed in the attribute value display window 4056 next to the bandwidth attribute 4049 as shown in Figure 21.

A clear button 4057 may be used by the user to reset or clear the values in the dialog box 4050. The dialog window 4050 may be closed by clicking a "close" button 4058.

Character or text attributes, such as the title attribute 4060, may be used to set search parameters. This is shown in Figure 22. Clicking on a character type icon 4059 next to the "title" attribute 4060 opens a dialog window 4062. Text strings may be entered in a text window 4063 in the dialog box 4062 to specify the text to be used as a search parameter. In a preferred embodiment, the search logic returns a "match" or "hit" whenever the text string entered in the text window 4063 matches any part of the title attribute value of an instance. It is as if "wild card" characters were on either end of the text string 4063 entered by the user.

In Figure 22, the user enters "dual" in the text window 4063 of the dialog window 4062 and clicks the "apply" button 4064. The entered text string appears in a text attribute display window 4061 next to the "title" attribute 4060. In the illustrated example, this action reduces the number of items found 4037 to ten.

Each navigational and search parameter setting step results in communication with the remote database server 4019, with the count of parts 4037 that currently satisfy the search criteria being displayed for the user, allowing the user to efficiently reduce the counts of parts 4037 being considered to a small, manageable number. For example, the initial number in parts available at the root class 4038 of the class hierarchy 4023 might be fifty thousand, with the user finally deciding to display ten to fifteen parts that satisfy his criteria after navigating to a class 4024 and setting one or more search parameters as described above.

The user then displays information about the matching parts, such as a text description, or other parametric attributes of numeric, enumerated, or Boolean types. This is done by clicking on a "display" tab 4022. Clicking the display tab 4022 results in a display shown in Figure 23. An instance display window 4066 opens to show information about the instances returned which met the search parameters entered by the user. In the illustrated example, a sequential number 4067 is assigned to each instance. The part number 4068, title or description 4069, price 4070, and package type 4071 for each part is displayed. Additional information may be viewed by moving a scroll bar 4072. The order in which the parts are

displayed may be changed by clicking a sort button 4074. For example, parts may be sorted based upon price 4070, or based upon package type 4071.

The information for a part might also be marked as having additional information associated with it on the World Wide Web. For example, the complete data sheet for a part, including all specifications, usage notes, and characteristics information, may be available as an HTML document, with its Universal Resource Locator ("URL") associated with the parts as one of its parameters. If an instance is selected and it has a URL associated with it, a "hot links" button 4075 will become active. The user may click on the hot links button 4075 to cause the browser 4014 to retrieve the HTML document, or download an applet in the form of executable content (for example, a circuit simulation applet to model the selected integrated circuit's performance). The user may choose to browse this associated information by choosing to view linked data, resulting in the launch of an instance of a Web browser with the URL. URLs may also be associated with any class, attribute, or standard attribute value within the knowledge base 4012. For example, a URL for an HTML document describing all of National Semiconductor's plastic integrated circuit package types could be associated with an enumerator for the attribute package type 4071. Selecting the option to view this linked data would launch the Web browser 4014 beginning at the URL, allowing the plastic package application notes to be viewed. Any of these associated URLs might also be Java applets, whose launch results in execution of the applet locally within the users Web browser 4014. For example, an output voltage attribute might have an associated applet that interacts with the user, accepting various input parameters and dynamically graphing the resulting voltage or current curves representing device characteristics. This allows for interactive functionality associated with any database element to be delivered to the user on demand.

Finally, the user may decide to order a sample of a part. The user would choose an "order sample" link associated with the information displayed for a part, and an applet would run in the browser allowing the user to specify quantity desired, intended use, ordering and billing information. This information would be communicated using an executable content based remote procedure call mechanism to an application at National Semiconductor that would automatically verify and place the order for the user. An executable content based remote procedure call mechanism will be described in more detail below.

Referring to Figure 23, an instance (or in this example, a part) may be selected, and detailed information about the instance (or part) may be displayed by clicking an information button 4073. An item information window 4076 shown in Figure 24 will then be displayed.



The item information window 4076 displays attributes 4077 in one column, and the associated attribute values 4078 in another column. A URI 4080 associated with this item may be shown, and its value 4079 would be the actual uniform resource locator information for the hyperlinked HTML document, applet, or other information. Information, such as price 4081, may have a user ID dependent value 4082. The server 4013 may associate a particular price with predetermined destination information based upon the user's indicated Internet address, so that discount pricing information for preferred customers may be displayed as the value 4082 for the price attribute. Similarly, the currency may be converted to the user's local currency using the current exchange rate based upon the user's location indicated by the information sent with the user's query. In addition, the language used for the display could be selected based upon such information. If the user's origin information indicates that the current query comes from a user located in France, the display may automatically switch to the French language for the display of the query results.

The item information window 4076 preferably includes an outline display 4084 of the class hierarchy that the user navigated in reaching the current query results. The item information window 4076 may be closed by clicking an "OK" button 4083.

Referring to Figure 19, searching may be further facilitated by providing a mechanism for locating classes by name. For example, a user may be looking for analog devices. He may be interested in finding any class that uses the word "analog" in the name of the class. A "find" button 4085 may be used for this purpose. When a user clicks on the find button 4085, a class name dialog window 4086 opens, as shown in Figure 25. A text entry field 4087 is provided where the user may type in a character string to be used in a search of class names. The query results include an indication 4088 of how many classes were found corresponding to the text entered by the user. The user may view the results by alternately clicking a "find next" button 4089 and a "find previous" button 4090. The dialog window 4086 may be closed by clicking a close button 4091. Alternatively, the dialog window may be closed, and the user returned to the original class he had selected before performing the class search, by clicking button 4092.

At any point, a user may access context sensitive help by clicking a help button 4094. A user may terminate the retriever client 5121 by clicking an exit button 4093.

An animated icon 4065 may be displayed in a preferred embodiment to identify to the user a particular type of executable content applet 4016.

The system described in application Serial No. 08/339,481, filed Nov. 10, 1994, by Thomas S. Kavanagh, et al., for OBJECT ORIENTED DATABASE MANAGEMENT

SYSTEM, may be advantageously used for the knowledge base server 4013. Such a system, in conjunction with the present invention, may provide a parametric search engine that allows intuitive, definitive and virtually instant remote access to data based on parametric attributes; which is how customers and searchers typically think about the product or item for which they are searching. This interactive, intuitive search mechanism can be delivered over the World Wide Web, connecting server sites to customer client sites in a whole new, powerful way. The present invention is the first system to employ true client/server architecture where interactive calls are being made to a server during an applet session comprising executable content downloaded over the connection between the client and a server.

The present invention may be better understood in connection with the embodiment shown in Figure 1. This illustrated embodiment employs a network 100 having a client/server architecture including a knowledge base server 132. The knowledge base server 132 is associated with and coupled to a knowledge base 123. A server host 109 may be designated to run the knowledge base server 132, with the software for the knowledge base server 132 and the knowledge base 123 preferably residing on a local disk drive 110. In accordance with the present invention, the server host 109 is preferably connected to a wide area network 2104. (See Figure 7). In an especially preferred embodiment, the server host 109 is preferably connected to the Internet 5124, either directly or via the network 100. (The Internet is a specific example of a wide area network, and is believed to be the largest wide area network on Earth).

One or more knowledge base clients are connected to or otherwise able to communicate with the knowledge base server 132. In accordance with a preferred embodiment of the present invention, a knowledge base client 111 may be located at a remote location relative to the server host 109. Communication between the remotely located knowledge base client 111 and the knowledge base server 132 may occur via a communications circuit such as the Internet 5124. Preferably, the remotely located knowledge base client comprises an applet 5121, which includes a graphical user interface ("GUI") and an executable content client 5121 that runs as executable content under the control of a World Wide Web browser 5120, as shown in Figure 5. The web browser 5120 includes a capability for executable content, such as a Java runtime environment. Referring again to Figure 1, the network 100 may include knowledge base clients 112, 118, and 111, which are connected or capable of communicating with the knowledge base server 132 over the network 100. The network 100 may be a wide area network, in which case one or more of the knowledge base clients 112, 118, and 111 may be an

executable content client 5121 that runs as executable content under the control of a browser having a capability for executable content, such as a Java runtime environment, suitable browsers including version 3.0 or above of Netscape Navigator™ or Microsoft Internet Explorer™. The network 100 may be a local area network, in which case one or more of the knowledge base clients 112 and 118 may be machine specific local applications, suitable examples of which are described more fully in application Serial No. 08/339,481, filed Nov. 10, 1994, by Thomas S. Kavanagh, et al., for OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM.

A Krakatoa proxy server 5128 is used to facilitate transfer of information between a remote client 111 communicating over the Internet 5124 and the knowledge base server 132. The Krakatoa server 5128 serves as a proxy between an HTTP server 5127 and the knowledge base server 132. In the embodiment described herein, the Krakatoa proxy server 5128 runs on the same host 106 as the HTTP server 5127, for reasons which may be better understood in connection with the detailed description of the operation of the Krakatoa proxy server 5128.

#### Detailed Description of a Krakatoa Proxy Server

A Krakatoa proxy server 5128 is a multi-threaded server that simultaneously services requests from multiple clients 5121 that are concurrently connected. The server 5128 has the ability to provide direct connection through a communication circuit 5124, the Internet being the preferred communications circuit 5124, as well as the ability to provide a simulated socket using the hypertext transfer protocol, sometimes referred to as the "http protocol." Information concerning the hypertext transfer protocol may be found in T. Berners-Lee, et al., The Hypertext Transfer Protocol - HTTP/1.0 (1995). The http protocol provides a mechanism that transfers a single document for each connection made. The proxy server 5128 works with a tunneling agent 5129 that encapsulates the protocol data for movement as a document through the http protocol. The proxy server 5128 maintains information about each client session to provide the illusion of a continuous session, despite the use of individual connections for each remote procedure call ("RPC") data exchange with the client 5121.

The proxy server 5128 handles the multiple concurrent connections by establishing a Java thread for each client connection that is being processed. The connection mechanism is illustrated in Figure 12. Item 5000 shows the operation beginning by listening to a selected port on the server that is running the proxy server code. When a connection is established in 5001 with a client 5121 on a remote computer via a connection channel like the Internet 5124,

the proxy server 5128 creates a thread in 5002 to handle the client connection, and then continues to listen to the port for another connection with another client computer.

The process for the client connection in step 5002 is described in more detail in Figure 13A and Figure 13B. The thread starts at step 5009. The thread begins by reading from the communications connection a stream of bytes in step 5010. The stream of bytes is formatted to include a header 5110, a body of data 5111, and a trailer 5112, shown in Figure 9. The header 5110 and the trailer 5112 are of known size and pattern to both the client 5121 and the server 5128. Details of the header 5110 are shown in Figure 11, and details of the trailer 5112 are shown in Figure 10. The packet format described herein provides a mechanism to allow variable length packets 5113 to be transferred. The data byte count field 5106 of the header 5110 describes the length of the data field 5111 of the packet 5113. The header byte count plus the data byte count 5106 plus the trailer byte count constitute the length of the packet 5113. The packets expected by this thread are a type referred to as a "call packet", and are identified by an appropriate code in a packet type field 5102. The decoding of the packet header 5110 described in step 5011 of Figure 13A comprises the steps of determining the packet length using the data byte count field 5106, validating that a packet 5113 is recognized as a call packet using information in the packet type field 5102, and validating the magic number field 5100. If the header 5110 is found to contain an error, then an exception is thrown in the Java language, which invokes the language's exception mechanism.

When an exception is caught in step 5013, a terminate sequence is initiated at step 5022. The terminate sequence is further described in Figure 13B, beginning with the correspondingly numbered step 5022. The connection with the client 5121 is closed in step 5025. This causes the communication circuit that was established in step 5001 to be broken, and all communication with the client 5121 that established the connection will be discontinued. Following the termination of the connection, the thread that is processing the connection dies in step 5028. The processing for that client 5121 is completed in step 5030.

Referring to Figure 13A, in the normal case where a packet header is found to be correct in step 5012, the process continues in step 5015 with the retrieval of the data portion 5111 of the packet 5113 from the communication circuit. If the correct number of bytes are retrieved from the communication circuit in step 5015, then in step 5016 a decision is made to continue processing in step 5019. If the byte count is incorrect, then an exception is thrown in step 5017, and termination processing is initiated in step 5022. Termination processing

continues with steps 5022, 5025, 5028 and 5030 as described above with reference to Figure 13B.

Referring to Figure 13A, if a packet 5113 has the correct number of bytes in the data portion 5111 of the packet, then the trailer 5112 is read from the stream in step 5019.

- 5 Processing continues, as indicated by reference numeral 5020 shown in Figure 13A and in Figure 13B. The trailer 5112 of the packet is then verified in step 5023 to determine that all of the data has been transferred from the client 5121. The trailer 5112 is considered to be correct if the magic number 5109 of the trailer matches a corresponding number specified by the protocol. If the trailer 5112 is found to be incorrect in step 5023, then an exception is thrown
- 10 in step 5024, and termination proceeds in steps 5025, 5028 and 5030 as previously described.

- If the trailer 5112 of the packet is found to be correct in step 5023, the packet 5113 is decoded in step 5026 to determine what action is to be taken by the server 5128 on behalf of the client 5121. A call identifier or call number 5103 is extracted from the packet header 5110 in step 5026, and processing continues with step 5027 to determine what arguments are
- 15 required for this remote procedure call. The arguments are marshaled in an agreed upon order by the client 5121 and the proxy server 5128, meaning that the client 5121 places the arguments into the stream of data 5111 that is being handled by the communication circuit, and the server 5128 removes the data 5111 from the stream in exactly the same order, using the same data types that the client 5121 used to place the data into the data stream. This is referred
- 20 to as marshaling. When the argument marshaling has been completed in step 5027, the signature of the call is checked in step 5029 to determine if it is appropriate to proceed with the actual remote procedure call to the server 5128 in step 5031. If the signature is found to be incorrect in step 5029, then the server 5128 proceeds to terminate the connection by throwing an exception in step 5032, and beginning the termination process by proceeding to step 5025.
- 25 Termination proceeds with steps 5025, 5028 and 5030 as previously described.

- A flow chart for the process employed for signature checking is shown in more detail in Figure 14, and will be described later. Referring to Figure 13B, if the signature is found to be correct in step 5029, then the actual call to the Krakatoa server 5128 is made in step 5031. In performing step 5031, the Krakatoa server 5128 will typically make a call to one of the PMX
- 30 servers, i.e., the knowledge base or database server 5130, the registry server 5132, or the license management server 5133. After the call has been performed in step 5031, detailed error information is collected in step 5034 to indicate the success or failure of the operation. The error data is prepared for return to the client 5121 in step 5034. In step 5035, if the error

information collected and processed in step 5034 indicates that the remote procedure call was a success, then the resultant data is retrieved in step 5038. The data is then sent back to the client 5121 in step 5036. If the error information indicates that the call was unsuccessful, step 5036 is performed as described more fully below.

5        Figure 16 shows in more detail the method performed in step 5036 to send information back to the client. The illustrated method begins with step 5135. In step 5136, a reply packet 5113 is constructed. The packet 5113 is marked as a reply packet in the packet type field 5102, the header magic number 5100 is inserted, the call number 5103 and call version 5104 are added, and the number of bytes of the reply that is made up of the error data 5111, and the  
10        return data 5111, if present, is set as the data byte count in field 5106. Step 5136 is completed by writing the packet header 5110 into the communication circuit. In step 5137, the data bytes 5111 that constitute the reply to the client 5121 are written into the communications circuit. In step 5136, the packet trailer 5112 is created and marked with the trailer magic number 5109, and written into the communication circuit. The packet 5113 is now complete, and is sent in  
15        step 5139. At this point, the server thread has finished sending the reply, as indicated by step 5140. Returning to step 5036 shown in Figure 13B, the server thread proceeds to return to the start operation in step 5009 (see Figure 13A). The server thread is now ready to read additional bytes from the stream and process the next request from the client 5121.

20        In the event that the client 5121 decides to terminate the connection without issuing a specific logout operation, rather, the client 5121 proceeds to close the communication circuit without warning to the server 5128, the server 5128 receives what appears to be an erroneous packet header in steps 5010, 5011, and 5012. This causes the server thread that was processing remote operations on behalf of the now non-existent (i.e., disconnected) client 5121 to throw an exception in step 5013 and begin termination proceedings in 5022, as described previously.

25        The signature checking mechanism indicated as step 5029 in Figure 13B is shown in more detail in Figure 14. Referring to Figure 14, signature checking begins at step 5050. The first step 5051 involves extracting bytes of information from the data stream provided by the communication circuit. If the stream completed the read successfully, as determined in step 5052, then the number of arguments are checked in step 5053 to determine if the count is  
30        correct. If the number of arguments are correct, a determination is made whether to translate certain arguments in step 5054.

If the read of the arguments fails in step 5052, or the argument count is determined to be incorrect in step 5053, then the processing continues at step 5061, wherein the signature is declared as incorrect. Processing continues to step 5032 shown in Figure 13B.

5 In step 5054, if certain arguments are determined to be arguments that should be translated, then the arguments are handles used to simulate a persistent session. The handles are translated in step 5055 by looking up a reference given by the client 5121, and translating it to the corresponding handle that is used by the database server 5130. In step 5059, the result of the translation is examined, and the result is stored in step 5056 if the result was correct. If step 5059 determines that the translation failed, error information is generated in step 5060, and  
10 processing continues with the declaration of a bad signature in step 5061. In step 5054, if the argument does not require translation, the operation proceeds directly to the storing of the argument in step 5056.

At the conclusion of step 5056, a determination is made in step 5057 concerning whether more arguments need to be extracted from the data stream. If so, the processing  
15 continues by returning to step 5051 again. In step 5057, if all of the arguments have been extracted from the stream, then processing continues to step 5058. In step 5058, the data stream is checked to determine if the stream is now empty. If it is not, then extra data has been supplied, and the signature of the requested operation is declared incorrect in step 5061. In step 5058, if the data stream is found to be empty, the process continues to step 5062 where the  
20 signature is determined to be correct. The process then returns to step 5031 shown in Figure 13B.

The error detection mechanisms described in the proxy server 5128 that caused the termination of the connection with the client 5121, and the termination of the thread that is servicing the client 5121, are mechanisms unique to a proxy server 5128 according to the  
25 present invention. The model that is used provides protection against rogue clients that may attempt to prevent service to other clients. If a particular first client 5121 attempts to cause the proxy server 5128 to deny service to other clients, the proxy server 5128 destroys the thread that is servicing the first client 5121 that made the rogue request. The described implementation is designed to prevent a first client 5121 from interfering with or affecting a  
30 thread that is servicing a second client, and at most, a first client 5121 may deny service to itself by causing its own thread to be terminated, but may not affect any thread that is not servicing the first client 5121.

Typical attempts to deny service involve inflating the data byte count 5106 to cause the proxy server 5128 to allocate all of available memory. Internal limits placed on packets of "call packet" type cause the thread to terminate the transaction, and any further processing of that thread. Any error in protocol, as shown earlier, causes the termination of the thread. The

5 Java programming language allows the enforcement of the error handling cases through the exception model. Java is the preferred implementation language for this type of mechanism. Other languages could implement this model; however, other compilers may not enforce the error handling cases, as the Java language does. Java also provides runtime checking of the types that are being used in each method operation, including, but not limited to, array bounds  
10 checking. A rogue client cannot force a Java program to use data that is outside of the bounds of an array, with the intent of spoofing the program into doing an illegal operation, or crashing altogether.

#### HTTP Simulated Sockets

When an application attempts to setup a client/server communication circuit, in an  
15 environment such as the Internet 5124, there are instances where mechanisms exist to prevent the connection from being completed. These prevention mechanisms are known to those skilled in the art as "firewalls." The firewalls consist of hardware and software whose express purpose is to control the flow of information going through the firewall mechanism. Figure 5 illustrates a first firewall, or client-side firewall 5125, and a second firewall, or server-side  
20 firewall 5126. The firewalls 5125 and 5126 accomplish their purposes by controlling the ability to perform incoming or outgoing connections to specific addresses. In practice, operators of these firewall mechanisms typically are not easily persuaded to change their connection policy. As a result, additional measures are required to establish client/server communication in these environments.

25 Many of the installations that use such firewall techniques allow the use of the http protocol to facilitate the use of the World Wide Web. This protocol is nearly universally allowed to operate through the firewalls 5125 and 5126. As a result, it is possible to request service from an http server 5127 at the serving site to provide information to a requesting entity 5123 at the client site. Since the http protocol is able to pass text information, a mechanism in  
30 accordance with the present invention can be used to perform a remote procedure call for a client 5121 that is executable content. The client 5121 must connect correctly, and manage the protocol correctly to make this mechanism work successfully.



The present invention uses a mechanism, referred to as "tunneling," as one feature to permit the http protocol to be used to transfer a RPC request and response data as plain text through the http servers 5127 and 5123. The present method employs a common gateway interface ("CGI") tunnel mechanism 5129 behind the http server 5127 to interpret a request, forward it, and encode a reply that is returned to an executable content client 5121. A CGI tunnel 5129 is invoked through a universal resource locator or URL that has attached arguments. The CGI tunnel 5129, once started, receives the arguments through a command line. The arguments are extracted by the CGI tunnel 5129 and interpreted for use by CGI tunnel 5129, or for transfer to a Krakatoa proxy server 5128 via a socket 5021.

Referring to Figure 5, an applet 5121, comprising a graphical user interface and a client, runs as executable content under the control of a World Wide Web browser 5120. For purposes of the following discussion of how connections are established over a communications circuit 5124, the operation of the executable content client 5121 is of primary interest.

When the executable content client 5121 needs to request information, or perform a query or other function, a request is formatted or encoded as a standard request from a World Wide Web browser 5120 to run a CGI program. Of course, although the request appears to an http server 5127 on the other end of a communications circuit 5124 as having originated from the browser 5120, the request actually originates from the executable content client 5121. The executable content client 5121 generates a remote procedure call, and converts the remote procedure call from a binary form to a text form. The purpose of this conversion will be better understood in connection with the below discussion, but is generally performed so that the remote procedure call may be transmitted over the Internet 5124 using an http protocol.

In order to communicate the request to an http server 5127, it is necessary to establish a connection through the Internet 5124. The connection may optionally be established through a first http proxy server 5123, although a connection may be established directly without an intervening http proxy server 5123. The use of the first http proxy server 5123 is determined by the browser 5120, and is outside of the control of the executable content client 5121.

In the illustrated example, the Internet 5124 is used to complete a communication circuit by routing the request to a second http server 5127 that is identified in the requested URL. However, it should be understood that use of the Internet is not required, and a request could be routed to the http server 5127 over a wide area network, or a local area network. The request from the executable content client 5120 that is addressed to the http server 5127 may be

routed through a first firewall 5125 and a second firewall 5126 using http protocol. The first and second firewalls 5125 and 5126 are typically configured to allow the operation of http protocol through the Internet 5124. The second http server 5127 interprets the URL received from the executable content client 5121 to determine what action to take. In the present example, the URL is formatted as a request to run a CGI program, and a tunnel 5129 is invoked to run as a CGI program. The tunnel 5129 takes an argument portion of the URL received from the executable content client 5121, and blindly converts the argument from text to a binary form. The tunnel 5129 does not attempt to interpret the argument. However, the conversion performed by the tunnel 5129 places the data back into the form of a remote procedure call that can be executed by a Krakatoa proxy server 5128.

At this point, it is necessary to pass the now converted remote procedure call data to the Krakatoa proxy server 5128. The CGI tunnel 5129 is preferably constructed so that it will not allow the executable content client 5121 (and consequently any other external agent) to specify the address of a particular host to which the tunnel 5129 is to connect. This provides a measure of security to prevent hackers from mis-using the tunnel 5129 to penetrate the second firewall 5126. In accordance with a preferred embodiment of the present invention, the tunnel 5129 opens a socket associated with the "localhost," which by convention is usually the host having an address of 127.0.0.1. This provides an additional measure of security. For example, a client 5121 will be limited in the servers to which it could connect by virtue of the use of "localhost" as the socket for such communications. The tunnel 5129 writes the data comprising the remote procedure call to the socket 5021.

The Krakatoa proxy server 5128 listens to the socket 5021. The Krakatoa proxy server 5128 will, therefore, receive the data written to the socket 5021 by the tunnel 5129. The Krakatoa proxy server 5128 interprets this data as a remote procedure call, and executes the corresponding procedure. The Krakatoa proxy server 5128 may use a plurality of available servers 5130, 5132 and 5133 to execute the procedure call and thereby complete the request. The illustrated servers available to the Krakatoa proxy server 5128 include a knowledge base server 5130, a registry server 5132, and a license server 5133. From the standpoint of the servers 5130, 5132 and 5133 associated with the knowledge base 110, the Krakatoa proxy server 5128 functions as a client. The Krakatoa proxy server 5128 generates API calls to the servers 5130, 5132 and 5133 associated with the knowledge base 110. The Krakatoa proxy server 5128 functions as a proxy between one protocol and another. It serves as a proxy between a protocol in the form of RPC calls from the tunnel 5129, and a protocol in the form

of API calls to the knowledge base server 5130, and other servers 5132 and 5133 associated with the knowledge base 110.

The CGI tunnel 5129 takes as its arguments the request that is being made of the Krakatoa proxy server 5128. In a preferred embodiment, the arguments are encoded so that all of the bytes in the request are ASCII text characters. The transformation is preferably performed by splitting each byte into two 4-bit entities, and adding the entity to an upper case ASCII "A" character. Thus, a 4-bit entity that represents "0" becomes an "A", a "1" becomes a "B", and so forth. This transformation is faster than attempting to transform the data into an ASCII hex representation of the data, since a like transformation can be applied at the packets' destination.

A flow chart of the method performed during operation of the CGI tunnel 5129 is depicted in Figure 15. The tunnel method is started with command line arguments in step 5070. The next step 5071 in the method is capturing an http command line argument. The argument (which is an encoded packet) is then decoded in step 5072, as described above (by splitting each byte into two 4-bit entities, and adding the entity to an ASCII "A" character). The CGI tunnel 5129 then connects to the Krakatoa proxy server 5128 in step 5073, so that the request can be forwarded to the Krakatoa proxy server 5128. This connection is made via socket 5021, as described more fully in connection with Figure 5. Once the connection is established, the CGI tunnel 5129 writes the decoded request bytes of data to the Krakatoa proxy server 5128 in step 5074. After sending the data to the Krakatoa proxy server 5128 via the socket 5021, in step 5075 the CGI tunnel 5129 reads from the socket 5021 to obtain a response from the Krakatoa proxy server 5128. In step 5076, the response is then encoded by the CGI tunnel 5129, in the manner described above, and prepared for transmission back to the executable content client 5121. A content-type identifier is sent to the second http server 5127 (which invoked the CGI tunnel 5129) in step 5077, to notify the second server 5127 what type of reply to send to the executable content client 5121. The content type indicates to the second http server 5127 that the stream of data that is being returned is plain-text. It will be understood that, although the packet data is indicated as being plain-text, the actual data has been encoded as previously described (binary data is converted to text) in step 5076. The encoded data is then sent to the second http server 5127 in step 5078, and the connection to the Krakatoa proxy server 5128 is closed in step 5079. The method ends at step 5080.

Client Interaction With The Krakatoa Proxy Server

The client's 5121 interaction with the Krakatoa proxy server 5128 follows a protocol very similar to the operation of the proxy server. The client portion of the applet 5121 manages the transfer of information between the client applet 5121 (or use of the information transferred), and the Krakatoa proxy server 5128.

5       The executable content client 5121 begins operation when the client applet 5121 requests an operation. The executable content client 5121 is capable of packaging a request for service that is ultimately intended to be directed to the knowledge base server 5130. The request is delivered to the knowledge base server 5130 through the Krakatoa proxy server 5128. The executable content client 5121 communicates with the proxy server 5128, the  
10       preferred method being via the Internet 5124. If the connection is not established through the Internet 5124, then alternate communication circuits may be employed as described previously.

      When the request is made by the executable content client 5121, the client 5121 forms a request to the proxy server 5128 by creating a new "call packet". A general form of a packet 5113 is shown schematically in Figure 9. The illustrated example may either be a call packet  
15       or a reply packet, or possibly other types of packets that may optionally be employed in a particular implementation. The general structure for a packet 5113 will first be described in the context of a call packet example. The call packet 5113 contains a header 5110, a data field 5111, and a trailer 5112. These together constitute a call packet or request packet 5113. The packet header 5110 is shown in more detail in Figure 11. The packet trailer 5112 is shown in  
20       more detail in Figure 10.

      In the example of a call packet, the packet 5113 must be identified as a call packet. Referring to Figure 11, such identification is accomplished by placing an appropriate code in a packet type field 5102 of the packet header 5110.

      The operation to be performed by this call to the proxy server 5128 is identified in the  
25       packet header's call number field 5103. The version of the call interface is identified in a call version field 5104. The packet header 5110 includes a magic number field 5100. The magic number field 5100 is used to identify the beginning of the packet 5113. The magic number is a predetermined constant that has a particular bit pattern that is uniquely recognized as the beginning of a packet 5113. The header version field 5101 is used to identify the version of the  
30       packet header 5110 being used. A data byte count field 5106 describes the number of bytes contained in the data field 5111 of the packet 5113.

      Referring to Figure 10, the packet trailer 5112 contains a predetermined byte pattern in a trailer magic number field 5109 to identify the end of the packet 5113. The magic number is

a constant that has a particular bit pattern that is uniquely recognized as the end of a packet 5113. In a preferred embodiment, the trailer 5112 also may include a checksum field 5108 that is applied to all bits from the beginning of the header 5110 up to the beginning of the trailer 5112. This checksum 5108 assists in detecting invalid packets 5113, and is especially useful in  
5 detecting errors in transmission.

A bit pattern may be selected for the magic number used in the magic number field 5100 of the packet header 5110 that is unlikely to otherwise occur during communication (in order to avoid erroneous recognition of a stream of data bits as the beginning of a packet header 5110). Similarly, a bit pattern may be selected for the magic number used in the trailer  
10 magic number field 5109 of the packet trailer 5112 that is unlikely to otherwise occur during communication (in order to avoid erroneous recognition of a stream of data bits as the end of a packet trailer 5112). However, neither is necessary. Preferably, the magic numbers are ASCII hex string that are easy to recognize. The combination of a magic number for the header 5110, a magic number for the trailer 5112, and a data byte count field 5106 is used to determine  
15 whether a valid packet 5113 has been received, and it is considered to be highly unlikely that a random bit pattern would coincide to both magic numbers and be spaced apart the exact distance indicated by the value stored in the data byte count field 5106.

When making a call to the proxy server 5128, the client 5121 creates a packet 5113, loads a call identifying number into the call number field 5103, and places the arguments for  
20 the requested remote procedure call into the data field 5111. The client 5121 and the Krakatoa proxy server 5128 each recognize a predetermined set of remote procedure calls, each type of call in the set having a unique call identifying number 5103.

The packet 5113, including the arguments carried in the data field 5111, is converted to text in the manner described more fully above to be transported over the Internet 5124 as plain  
25 text, until the packet 5113 is reconverted back to its original form by the CGI tunnel 5129 after it reaches its destination. In a preferred embodiment, binary data is encoded to ASCII text. For example, '00h' is encoded as "AA", "01h" is encoded as "AB", and so forth with "0Fh" being encoded as "AP", and "FFh" being encoded as "PP".

The process for constructing a call packet is depicted in the flow chart shown in Figure  
30 17. The process begins, for the sake of discussion, with step 5200. The first step 5201 is to write the call packet header 5110, which is preferably in the form shown in Figure 11. The packet header 5110 is transferred into a data stream for transmission over the communications circuit.

Arguments are transferred into the stream at step 5202 in the following manner. Integer arguments are preferably converted into four 8-bit bytes. Floating point numbers are preferably transferred as 4 bytes. The transfer order of the bytes is not critical, so long as the client 5121 and the proxy server 5128 use the same ordering technique. Arrays of numbers are preferably transferred as an integer count, followed by the number of items that are indicated in the count field. Strings are preferably transferred in the same manner. Complex data structures can be transferred by using these techniques to transfer the component parts of the complex structure.

After transferring the arguments to the call, the packet trailer 5112 is appended to the data stream in step 5203, and the stream is sent to the proxy server 5128 in step 5204. The request portion of the client's call is now complete in step 5206.

Referring to Figure 18A, the client 5121 then waits for a reply from the proxy server 5128 in step 5207. The client 5121 begins the process described in Figure 18A by reading from the connection that it has established with the proxy server 5128. The read is performed in step 5208. The client 5121 reads a packet header 5110 in step 5208, and expects to find a packet header 5110 that is a header for a reply packet. The decode process in step 5209 looks for a matching call number 5103, call version 5104, and a packet type 5102 that indicates that the packet 5113 in this example is a reply packet. In step 5210, the packet header 5110 is examined to determine whether it is a valid packet header. If the header 5110 is found to be invalid, then an exception is thrown in step 5211 back to the client 5121, and the communication with the proxy server 5128 has failed. The process terminates in step 5212. If the header 5110 decodes correctly in step 5209, then the client continues to read the data field 5111 of the packet 5113 in step 5213. The length of the data field 5111 is checked against the length specified by the data byte count field 5106 of the header 5110 in step 5214. If the number of bytes in the stream does not match, in step 5215 an exception is thrown back to the client 5121. The process terminates in step 5212.

If the number of bytes in the data field 5111 is correct as specified by the data byte count field 5106 of the header 5110, then processing continues at step 5217 where the packet trailer 5112 is read. The process continues from Figure 18A to Figure 18B, as indicated by common reference numeral 5218.

Referring to Figure 18B, the trailer 5112 is examined to determine if it is correct in step 5220. If a trailer 5112 is used to ensure that all of the packet 5113 was received from the proxy server 5128, it marks the end of the transfer. If the trailer 5112 is found to be in error in

step 5220, then an exception is thrown back to the client 5121 in step 5221. The process terminates in step 5212.

If the trailer is complete, then the transfer is complete, and processing of the contents of the data field can proceed at step 5222. The first thing that is preferably contained in the data field 5111 of a reply packet 5113, is error reporting information. This error information is used to indicate the success or failure of the requested operation. The error information is extracted in step 5222, and is examined in step 5224. If a failure is indicated by the error information in step 5224, then in a preferred embodiment no data follows in the packet 5113. The failure is reported back to the client 5121 by the throwing of an exception that indicates the requested remote operation failed in step 5225. Failure is usually caused by incorrectly specifying the arguments to a requested function or remote procedure call. The user is notified of the error in step 5230.

If, in step 5224, the error code indicates that no error occurred, then the process of extracting the bytes from the data field 5111 continues in step 5226. As the bytes are extracted, in a manner similar to the handling of arguments in the call packet discussed earlier, an object is constructed for use by the client 5121 in step 5227. The object contains data, and may contain methods to access individual data elements. The object may also contain methods which cause actions to additional operations to be performed by the proxy server 5128.

Once this object has successfully been created from the available data, it is returned to the caller 5121 in step 5228. The client operation is complete at step 5229.

In a preferred embodiment, the packet header 5110 may include a client sequence number 5105. As the executable content client 5121 makes calls to the proxy server 5128, each packet sent is given a sequence number 5105 that is incremented by the client 5121 for each call. If a particular packet is delayed or lost in transmission, the proxy server 5128 can use the sequence number 5105 to determine that a call was missed or is missing, or a packet 5113 was received out of sequence. The proxy server 5128 may request retransmission of the missed packet or call, or alternatively return an error code to the client 5121.

A client ID filed 5107 may be used in the packet header 5110 for purposes of identifying the client 5121 that originated a packet 5113. Such information may make it easier to administer multiple connections with less overhead. Alternatively, the proxy server 5128 may establish a table and give each client 5121 establishing a connection a handle, or otherwise keep track of the different clients that have established a connection. A unique client ID filed 5107 may be used as a code to identify registered users, or to identify that a connection being

made is the same client 5121 that was previously disconnected, and previous query results may be retrieved for that client 5121. Alternatively, the client ID filed 5107 may be used to display predetermined information intended for a particular user, such as discount pricing for a preferred customer, as described above in connection with Figure 24.

5       The Krakatoa proxy server 5128 preferably performs connection management when simulated sockets are used. The proxy server 5128 keeps track of connections, and "ages" the connections. If the executable content client 5121 does not communicate with the proxy server 5128 within a predetermined amount of time, it will "time out". When a connection between the proxy server 5128 and the client 5121 times out, the proxy server 5128 will close an  
10       associated connection between the proxy server 5128 and the knowledge base server 5130 to free resources held by it, such as queries, query results, and so forth. In addition, the proxy server 5128 will close an associated connection between the proxy server 5128 and the license server 5133 to free resources, such as licenses allocated to the connection. A similar action occurs with respect to the registry server 5132.

15       The above discussion has been with reference to an embodiment using what may be referred to as "Java tunnel mode." Alternatively, a mode of operation that may be referred to as "Java direct mode" may be used. In direct mode, connections are preferably managed so that a user can only connect back to the same IP address as the user's IP address.

      In the example illustrated in Figure 5, requests to the proxy server 5128 are  
20       accomplished through a firewall 5126 via an http server 5127. In a typical network, a firewall 5126 will permit connections through a port associated with http connections, such as port 80. If no firewall 5126 exists between the executable content client 5121 and the proxy server 5128, a direct connection may be established between the browser 5120 and the proxy server 5128. For example, if the communications circuit between the browser 5120 and the proxy  
25       server 5128 is a local area network, the browser would typically be on the same side of a firewall 5126 as the proxy server 5128, if the network had a firewall 5126. In other words, there would be no firewall 5126 between the executable content client 5121 and the proxy server 5128, and a direct connection would be possible. The proxy server 5128 may listen to a port that is designated for direct connection to the proxy server 5128. In addition, users with  
30       certain privileges or security clearance may be allowed to connect through a hole in a firewall 5126 that is provided for a port that is specifically designated for connection to the proxy server 5128. (A firewall 5126 controls which ports are allowed for connections through the firewall



5126.) The http server 5127, the CGI tunnel 5129, and the socket 5021 would not be required for such a direct connection.

### Extended Queries

One feature of the present invention provides a mechanism for authoring extended queries based on the current selected class, or alternatively, based upon the owning class of the instance. The authoring of extended queries allows the formation of complex queries into the database that is currently in use, or even into another database. For example, it is possible to define a query from one subtree in a hierarchical object oriented knowledge base to another subtree in that hierarchical object oriented knowledge base. It is possible, using extended queries, to establish links between the attributes. It is also possible to do one-to-many cascading queries. A query can comprise a query that maps to any class in a knowledge base, including mapping a class to itself.

This feature may be better understood in connection with Figure 26A, Figure 26B and Figure 26C. Figure 26A is a schematic diagram of a hierarchical knowledge base having a root class 600. The knowledge base root class 600 has a section containing information about semiconductor components having a class 601. The knowledge base root class 600 also has a section containing information about vendors that starts with class 602. Alternatively, class 601 may be a root class for a first component knowledge base, and the vendor class 602 may be a root class for a separate vendor knowledge base. This is signified by the dotted lines 614 connecting class 601 to root class 600, and connecting class 602 to root class 602.

The components or parts class 601 has a plurality of subclasses 603, 604, 605 and 606. For example, the components knowledge base may have a "digital logic" class 603, a "discrete semiconductor devices" class 606, an "analog/linear" class 605, and a "display circuits" class 604. The "analog/linear" class 605 in turn is shown having a plurality of subclasses 607, 608 and 609. For example, the "analog/linear" class 605 has a "comparators" subclass 607, a "references" subclass 608, and a "standard linear" subclass 609.

The "standard linear" class 609 has a "data acquisition" subclass 610, a "regulators" subclass 611, a "references" subclass 612, a "comparators" subclass 613, and an "amplifiers & buffers" subclass 615. The "amplifiers & buffers" subclass 615 has a "buffers" subclass 616 and an "operational amplifiers" subclass 617.

The vendors class 602 has a plurality of subclasses 618, which in turn may have a plurality of subclasses 619 and 620, which may also have subclasses 621. Figure 26A is

intended to be a simplified diagram, and it will be appreciated that other classes may also exist, but are not shown for the sake of simplicity.

Referring to Figure 26B, the semiconductor components information 601 shown in Figure 26A may include attribute information, such as "internal part number" 622, "vendor ID" 623, "vendor part number" 624 and "title" or description 625. Additional attribute information is also included, but is not shown.

Referring to Figure 26C, the vendor information 602 shown in Figure 26A may include attribute information, such as "vendor code" 626, "vendor part number" 624, "vendor contact" 627, "address" 628, "vendor name" 629, "sales office locations" 630 and "dealers who carry this vendor's merchandise" 631. Additional attribute information may be included, but is not shown.

An extended query could link a "vendor ID" attribute 623, for example, to a vendor knowledge base root class 602. The results of an extended query, for example that includes a particular vendor ID 623, would have a link or other mechanism for displaying to a user information from the vendor knowledge base 602, such as the vendor contact person 627 for more information about the part, the vendor's address 628 if the user wanted to write for more information, the vendor's sales office locations 630 (if the vendor sells direct), or the identity of dealers who carry this vendor's merchandise 631 (if the vendor sells through dealers). A graphical user interface may display an icon or task bar that a user may click on to access information from an extended query.

Extended queries may cascade. For example, an extended query to determine the sales office 630 nearest to the user's office that will accept fax orders and is open on Saturdays could be created. An extended query linking information about the dealers 631 could also exist.

An extended query wizard method is preferably used for construction of extended queries. The extended query wizard may be better understood with reference to Figure 27. An extended query wizard window 632 is displayed on the user's display 119. The user has the option of adding a new extended query 633 or editing an existing extended query 634. In the illustrated example, the user selects the desired option by clicking on a button 633 or 634. The user may cancel the operation by clicking on a cancel button 637. To proceed, the user clicks on a "next" button 635. A user is also presented with an option of going "back" 636, which button 636 is greyed if it is not available in a particular context.

Figure 28 shows the next window 638 presented to the user. The user is allowed to label each instance of an extended query, and a label input field 639 is provided in a window.

This label 639 may enable the user to find the extended query at a later time, and the user can give the extended query a label that is meaningful to the user. The label 639 need not be unique. Extended queries are identified externally by system generated handles. Like attribute names, extended query labels are not required. Extended queries are inherited from the class where the extended query is defined, similar to the way that attributes are inherited. The user may also enter a detailed description of the extended query in an extended query description field 640.

Figure 29 shows the next window 641 displayed to the user when the user clicks the "next" button 635. The label 639, and the description 640, entered by the user are displayed. The user is presented with an option of selecting the desired class for running the query 642, or to use the owning class of the instance when running the query 643. This selection is preferably made by clicking on radio buttons 642 or 643, as shown.

If the user selects the option of selecting the class for running the query 642, and clicks on the "next" button 635, the window 644 shown in Figure 30 is displayed. In order to allow the user to perform extended queries linking a plurality of knowledge bases, the user is presented with a knowledge base selection window 645, where the user selects from among the available knowledge bases by clicking or highlighting the desired knowledge base 650. If the number of knowledge bases that are available exceed the number that may be displayed at one time in the knowledge base selection window 645, a scroll bar 647 is provided to enable the user to view all of the available knowledge bases.

A class selection window 646 is provided that displays available classes in the selected knowledge base 650. Only opened classes 651 and subclasses 652, 653, 654 and 649 of opened classes 651 will be displayed. A user may open each displayed class by double-clicking on the class 649, in order to navigate the class hierarchy to reach the desired class 649. A scroll bar 648 is provided to allow the user to view long class names 654 that exceed the size of the class selection window 646. When the user clicks on the "next" button 635, a window 655 shown in Figure 31 will be displayed.

Figure 31 shows a query construction window 655. The selected knowledge base 650 and label for this extended query 639 are preferably displayed for the user's reference. The attributes 656 to be used in the extended query are displayed in a first attribute display window 657. The attributes 658 to be mapped in the extended query are displayed in a second attribute display window 659.

The operators or selectors that are selected to be used for mapping in the extended query are displayed in an operator display window 660. The user adds a new operator or selector by clicking on an "add new selector" button 664. The user may be presented with a list of available operators in an operator or selector display window 667, or alternatively, the user may type in a desired selector. If a user wants to edit or modify an extended query, the user may select an operator 663, and then click on a "remove selected selector" button 666 to remove the selected operator 663.

A user may construct an extended query by selecting an attribute 661 in the first attribute display window 657. The user then selects an attribute 662 in the second attribute display window 659. The logical operators to be used in the query are selected, and displayed in the operator display window 660. When the extended query has been built, the user completes the process by clicking on a "finish" button 665.

For example, a user who is performing queries on a first knowledge base 601 obtains search results that provide a vendor part number 624, and the user wishes to perform an extended query linking a second knowledge base 602 to obtain vendor information relating to that part number 624. The user may select the part number attribute 661 in the first attribute display window 657, select part number in the second attribute display window 659, and select the operator to be "equals" 663. Then, when the user performs a query in the first knowledge base 601, and selects view search results, the user would be presented with a search results window 670, an example of which is shown in Figure 50. A button 671 or other graphical selection mechanism (or a menu) may be displayed to the user, which is identified with the user specified label 639. By clicking on the button 671, the user will then be able to view the associated information for a corresponding selected part 672 in the vendor knowledge base 602 based upon the extended query.

As noted above, a class 649 may be mapped to itself, if desired. Referring to Figure 31, an extended query may be built to determine replacement, upgrade, and/or downgrade parts. For example, to be a replacement, an attribute such as the number of pins may be selected, and an operator selected so that this parameter must be equal for another instance to qualify as a replacement part. A parameter such as breakdown voltage may be selected and set so that this parameter must be greater than or equal to the selected attribute in the first attribute display window 657 in order for another instance to qualify as a replacement part. An attribute such as slew rate may be selected to be less than or equal in order for another instance to qualify as a replacement part.

As another example, the selected class 649 may be a carbon resistor subclass for a parent class of resistors. Instances in the resistor class may have a tolerance attribute that is an enumerated attribute having possible values of 10%, 5%, or 1%. The selected class 649 for the initial query is the subclass of carbon resistors that have a corresponding tolerance attribute in the first attribute display window of 10%. The user may be interested in building an extended query that would include not only carbon resistors, but also metal film resistors and others, to consider upgrade parts if the price and availability information for such upgrade parts are acceptable. To be an upgrade, the enumerated values of 5% and 1% could be selected in the second attribute display window 659 for the tolerance attribute.

In Figures 27-31, a user's input may also be via a keyboard 121. For example, in Figure 27 the radio button 633 includes an associated label "Add New Extended Query." The initial "A" is underlined to indicate to the user that the associated option 633 may be selected via the keyboard 121 by pressing the ALT-A keys. Optional keyboard input may be accomplished by highlighting the currently selected option, cycling through available options in response to the Tab key, and interpreting a Space-Bar input as a "mouse click." Those skilled in the art will appreciate that optional keyboard input may be facilitated in a number of ways, but preferably in a manner that is consistent with a Windows interface so that experienced Windows users may immediately recognize how to use the keyboard 121 for input.

#### Configurable Graphical Action Bar

A unique feature of a user interface in accordance with a preferred embodiment of the present invention includes what may be referred to as a "configurable graphical action bar." The configurable graphical action bar is available for use by a searcher to more conveniently utilize extended queries, or display the results of an extended query based upon the current search results.

Extended queries are given a textual name 639 (see Figure 29) and an optional graphic file for presentation to the user. The present invention takes this information and builds an action bar at the bottom of each view results screen. Thus, it becomes a configurable, class-dependent query that is presented to the user at the level of the classification hierarchy that is appropriate. The action bar also contains extended queries appropriate for the current class. In addition, the action bar contains default actions for "close", "page next 10", "page previous 10", "sort", and "item information" (abbreviated as "item info."). In a preferred embodiment, these items always appear on the configurable graphical action bar.

A user then selects the appropriate action from the bar. The system performs the extended query and displays the results in a new window. The current instance information is displayed followed by the extended query information. Another action bar appears at the bottom of this display which contains additional, possible extended queries. This action bar contains default actions for "close", "page next 10", "page previous 10", and "item info." These default actions preferably always appear on a configurable graphical action bar.

1. Authoring Component (URL Wizard)

One feature of the present invention provides a process or mechanism for building parameterized URLs based on the current class. The authoring of such URLs allows the formation of complex URLs from templates that are filled in with knowledge base information from a currently selected instance. The parameterized URLs are given a textual name or label and an optional graphic file that may be used, for example, to display an icon for presentation to the user on the user's display 116.

Parameterized uniform resource locators or dynamic URL links are preferably built using a URL wizard process. The URL wizard process may be explained in connection with Figure 32. Figure 32 shows an example of a screen displayed when the URL wizard process is initiated. A URL wizard window 675 is opened, and the user is presented with the option of building a new dynamic URL 676, or editing an existing dynamic URL 677. The user selects the desired option 676 or 677 by clicking on the associated button 676 or 677 with the user's mouse 117.

If the user decides to cancel the URL wizard process, the user may do so by clicking on a "cancel" button 678. After the user has indicated the desired option 676 or 677, or the user decides to accept the default option, which is preferably the option of building a new parameterized URL 676, the user proceeds to the next step in the URL wizard process by clicking on a "next" button 680.

A "back" button 679 is provided for allowing the user to go back to the immediately previous screen. In the case of a first URL wizard window 675, the back button 679 may be greyed to indicate that it is not currently operational or does not apply to this window 675. Optionally, in an executable content client 5121, the "back" button 679 may be operational in the first URL wizard window 675 to go back to the previous screen, and have the same effect as a cancel button 678.

If the user clicks the "next" button 680 in Figure 32, the URL wizard process opens a URL label window 681, as shown in Figure 33. Referring to Figure 33, a first field 682 is

provided for entering a label 686 for the dynamic URL that is being built. A second field 683 is provided for the entry of a description of the dynamic URL that is being built. A third field 684 is provided to allow the user to specify a path to an optional graphic file to be displayed by the executable content client 5121 as an icon to click on to invoke the dynamic URL that is being built. A "browse" button 685 is also provided. The user may click the "browse" button 685, and browse directory folders to locate a desired graphic file. Once the desired file is located in this manner, if the user clicks on the file name, the directory path information will automatically be entered into the third field 684. When the user has completed entry of this information, the user clicks the "next" button 680. Alternatively, if the "next" button is highlighted, the user may hit the Return or Enter key on his keyboard 122.

Figure 34 shows the next window 687 displayed in the URL wizard process. A URL prefix field 688 is provided for entry of basic information concerning the dynamic URL that is being built. The URL information entered in the URL prefix field 688 is the part of the URL being built that is not dynamic.

A substitutable URL parameter window 689 is provided to display the parameters that may be substituted in this parameterized URL. In this example, the knowledge base name 691, instance handle 692, user login name 693, and part number 694 may all be dynamically changed to effectively accomplish extended queries of remotely accessible knowledge bases 4012 over the Internet 5124.

A URL prefix template window 690 is provided to aid in building the dynamic parameterized URL. When the entry of information required in Figure 34 has been completed, the user may click on the "next" button 680 with his mouse 117.

Figure 35 shows the final window 695 that opens in a preferred URL wizard process. A substitutable URL parameter window 696 is provided to display the parameters that may be substituted in this parameterized URL. A URL prefix template window 697 is also provided. When the process has been completed, the user clicks on a "finish" button 698. The final window 695 closes, and the dynamic URL is built.

## 2. Krakatoa Configurable Graphical Action Bar

One significant feature of the present invention provides a process or mechanism for using dynamic parameterized URLs with an executable content client 5121. In a preferred embodiment, an HTML client 5121 is preferably used. Building such URLs allows the formation of complex URLs from knowledge base data. The parameterized URLs are given a textual name or label and an optional graphic file that may be used, for example, to display an

icon for presentation to the user on the user's display 116. Figure 40 shows an example of a display screen 701 having a configurable graphical action region or bar 700. The dynamic parameterized URL information, including the textual name and associated graphic file, for each dynamic URL is used to build a configurable graphical action bar 700, which is preferably displayed at the bottom of each view results screen 701 displayed by the executable content client 5121. This produces a configurable, class-dependent, dynamic URL represented by a hyperlinked graphic 702 that is presented to the user at the level of the classification hierarchy that is appropriate. The configurable graphical action bar 700 contains dynamic parameterized URLs 702 appropriate for the current class. While described herein as a configurable dynamic action bar 700, the present invention is not necessarily limited to a "bar" configuration. The configurable dynamic action region 700 may be represented graphically in shapes other than a "bar." The configurable graphical action bar 700 may also include extended queries 707 appropriate for the current class. The configurable graphical action bar 700 preferably includes default actions 703, 704, 705 and 706 for "close" 703, display a page for the "next 10" 704 (if 10 items remain to be displayed, otherwise "next n" where "n" is the number remaining to be displayed and  $0 < n < 10$ ), display a page for the "previous 10" (if applicable), "sort" 705, and item "info" 706, and in a preferred embodiment, these always appear on the configurable graphical action bar 700 (if applicable). An action button for "previous 10" is not shown in Figure 40, because it is not applicable in the illustrated example.

The example illustrated in Figure 40 is a screen display showing the search results of a knowledge base for major league baseball. The illustrated screen display shows search results of a search for American League teams. The search returned fourteen teams. The screen displays that appeared during navigation of the knowledge base and search are not shown, this example being selected for the purpose of illustrating the configurable graphical action bar 700. In a preferred embodiment, ten items are displayed per page 701, leaving four teams that are not currently displayed. Thus, action button 704 is configured in this example to display information for the remaining four teams not currently shown. If the user clicks on the action button 704 with his mouse 117, a similar window would be displayed for the remaining four teams of the American League.

Each item in this example is an instance, and each instance has attributes such as team name 711, number of wins 712, number of losses 713, and batting average 708.

The "sort" action button 705 offers the user options for the order in which the items (in this example, American League baseball teams) are displayed that were returned in the search.



The user could click on the sort action button 705, and select a sort according to batting average 708. The order in which the teams would be displayed would then change to their rank in team batting average 708. In this example, the Cleveland Indians (abbreviated "CLE") 709 would appear at the top of the displayed page 701.

5 Each instance shown in Figure 40 has a radio button 714, 715, 710 associated with it. The user can select an instance (such as the California Angels) by clicking on the radio button 710 associated with it. The Cleveland Indians 709 would be selected by clicking on the radio button 715 associated with that instance. In the example depicted in Figure 40, the California Angels instance 710 has been selected, as shown by the appearance of a dot inside the radio button 710. The radio buttons 714, 715, 710 are used to dynamically configure the dynamic parameterized URL action button 702. The action taken by the system when the action button 702 is actuated depends upon which radio button 714, 715, 710 is selected. The action button 702 is dynamic because it is configured based upon the radio button 714, 715, 710 that is selected.

15 When the action button 702 is actuated by clicking on it, a remote procedure call to a Krakatoa knowledge base server 5128 is generated by the executable content client 5121 as described above with reference to Figures 1-5 and Figures 9-18. The parameters passed via a CGI mechanism depends upon the radio button 714, 715, 710 that is selected by the user.

Referring to Figure 40, the dynamic action button 702 will cause the roster information to be retrieved and displayed for the team that is selected 710. In the illustrated example, the selected radio button 710 shows that the Cleveland Indians 709 has been selected, and if the user clicks on the dynamic configurable action button 702, roster information for the Cleveland Indians will be retrieved. A display window 716 will be opened and displayed as shown in Figure 41. The window 716 depicts at the top of the page the information for the Cleveland Indians instance 709 from which this parameterized URL remote procedure call originated.

25 In the window 716 displayed in Figure 41, each instance corresponds to a player 719. Each instance has attributes, such as individual batting average 720, number of home runs 721, number of strike outs 722, number of stolen bases 723, hits 724, and so forth. The window 716 includes a configurable graphical action bar 700. The configurable graphical action bar 700 shown in Figure 41 includes an "info" action button 706, a "team" action button 726, a "test" action button 727, a "next 10" action button 704, and a "close" button 703. The "next 10" action button 704, when actuated by clicking on it, results in the display of the next ten players

for the California Angels 709. The "close" action button 703 will result in closing this window 716 when it is actuated.

Each instance has an associated radio button 725, 717. The user may select an instance 718 by clicking on the associated radio button 717. In the illustrated example, the player  
5 "Velarde, R." has been selected. The selected radio button 717 is used to dynamically configure parameterized URLs for the "info" action button 706.

When the "info" action button 706 is clicked, it results in the display of an information window 728 for the selected instance or player 718, as shown in Figure 42. In the illustrated example, a web page displaying information for the player Randy Velarde 729 has been  
10 retrieved by the executable content client 5121 and displayed in the window 728. In this example, the window 728 may be the display of an HTML document, including text 731 and graphics 730.

Figure 36 shows an example of a display window 735 of an executable content retriever 5121 for performing parametric searches of a remote knowledge base 4012. This shows a  
15 version of a display that includes a first frame 737 depicting a graphical representation 736 of classes of a knowledge base 4012. A second frame 738 displays attributes 739, such as "product description" 741, "catalogue identification" 742, "price" 743, "sale item" 744, "shipping options" 745 and "color" 754. The second frame 738 also displays search criteria 740 for the attributes 739. Entry fields 747, 748 and 746 provide for the specification of search  
20 parameters for the attributes 739. Check boxes 749 allow the user to negate the specified attribute parameters 747, 748 and 746, which make it possible, for example, for a user to specify a search for instances that do not have certain shipping options 745.

A first range field 751 and a second range field 752 allow search criteria to locate instances having an attribute 739 such as price 743 that falls within a range.

25 A unique feature shown in Figure 36 is a guardrails display 750. Guardrails 753 are also shown for the color attribute 754. Guardrails 750 and 754 are described in more detail below.

The display window 735 shown in Figure 36 also includes a "view" button 755, a "search" button 756, an "attribute counts" button 757, a "new search" button 758 and a "help"  
30 button 759. Actuating the "search" button 756 by clicking on it will cause the search criteria 740 entered by the user to be packaged as parameters into a remote procedure call to a Krakatoa knowledge base server 4013, which performs the requested call and returns query results to the executable content client retriever 5121.

Clicking on the "view" button 755 results in the display of a search results window 760 shown in Figure 37, based upon the user specified search criteria 740. Instances have associated radio buttons 763, 762 to permit an instance 766 to be selected by clicking on the radio button 763, 762 associated with the desired instance 766. In the illustrated example, the  
5 radio button 762 has been selected.

A configurable graphical action bar 700 is displayed at the bottom of the search results window 760. A dynamic URL or extended query action button 761 is included on the configurable graphical action bar 700. Actuating the action button 761 builds an extended query dynamically based upon the selected instance 762 of "wine stemware" 766 to search for  
10 similar "wine stemware" products. Figure 38 shows the extended query results window 764 that is displayed when the extended query action button 761 is actuated.

In Figure 38, information 765 is displayed for the "wine stemware" instance 766 that was selected in window 760 and which formed the basis for the displayed extended query results 768. The similar products information 768 includes instances that may be selected  
15 using radio buttons 769, 770. The selected instance 770 is used to build a dynamic action button 767 that can cascade an extended query for similar products that are similar to the selected instance 770.

Another example of cascaded extended queries would be an extended query of baseball teams (see Figure 40) that have won more than 5 World Series championships. Then a  
20 cascaded extended query can be performed to bring up player statistics for players who have played in such games, such as, of the pitchers who pitched in those World Series games, which pitcher won the most of those games.

Figure 39 shows another example of a search results window 771. This example shows a configurable graphical action bar 700 having a "previous 10" or "last 10" action button 772.  
25 Actuating an "order" action button 773 runs a template for an order system to enable a user to order a desired product over the Internet 5124. The configurable graphical action bar 700 includes parameterized URL action buttons 774, 775, 776 and 777. For example, a particular product may be selected by clicking on its associated radio button 778. Then clicking on the "store spotter" action button 774 will cause an extended query to be performed to find stores  
30 that have the selected product in stock.

A process for building a configurable dynamic action bar 700 is shown in the flowchart of Figure 43. The process starts at step 781. In step 782, information for all instances 779 is drawn to a new results screen 771 (such as that shown in Figure 39). A determination is made

as to whether more than one instance exists in this case. If the answer is no, (i.e., only one instance exists), the process proceeds directly to step 784. If more than one instance exists, then the process proceeds to step 783, where JavaScript™ code is generated to determine which instance is selected by the user (by clicking on radio buttons 778). Then the process  
5 proceeds to step 784.

In step 784, the "item info" button 706 is drawn. The process proceeds to step 785. In step 785, the selected class is used to build an extended query or dynamic URL (depending upon whether a remote procedure call via a Krakatoa knowledge base server 4013 is required). A determination is made as to whether there are any more dynamic URLs or extended queries.

10 If the answer is yes, the process proceeds to step 787, where JavaScript™ code is generated for dynamic URL or extended query execution. The associated graphic and text are rendered in the configurable dynamic action bar 700. The process loops back to step 785.

When it is determined in step 785 that there are no more dynamic URLs or extended queries, the process proceeds to step 788. In step 788, the "sort" button 705, the "last 10"  
15 button, the "next 10" button, and the "close" button are written on the configurable dynamic action bar 700. The process ends with step 789.

In a preferred embodiment, the configurable dynamic action bar 700 is implemented by having the executable content client 5121 build special JavaScript code and HTML for each possible choice 778. When the user chooses an instance by clicking on a radio button 778, the  
20 executable content client 5121 then executes the corresponding JavaScript and HTML code for the chosen instance in order to make the remote procedure call.

In summary, a user can select an appropriate query 702 and another window is opened displaying the results for the parameterized URL 702. Parameterized URLs can contain static hypertext markup language (HTML) for connection to a common gateway interface (CGI)  
25 5129 for dynamic HTML generation of other actions. A useful application of this technology for the present invention will be to connect to knowledge base servers 4013 with dynamically generated instance information.

In an alternative embodiment, a CGI tunnel 5129 may be provided having a JavaScript™ class that is a JavaScript™ code generator based upon input from the selected  
30 class associated with a selected radio button 778.

### 3. Server Component

The Krakatoa server 5128 may include a URL string that contains tags for attributes selected in a URL wizard process.

Executable content clients 5121 may make a call to a specialized method that takes the current instance information and fills in these parameters to produce a valid URL query string.

- 5 This string is appended to a URL authored by the URL wizard process to make a fully qualified, parameterized URL.

#### Guardrails

- Referring to Figure 20, a user, after navigating to a class 4024, can access all of the attributes 4025 at that class 4024 and use them to further refine his search. When Boolean attributes, enumerated attributes, or enumerated set attributes are selected, the predefined valid values for the attribute are displayed. For example, in Figure 20, the enumerated attribute "package type" 4039 has been selected, and the predefined valid values are displayed in the dialog window 4041. The user can then select from those values to define search criteria 4095 to further refine his search. For example, the user can select the "ceramic flatpack" 4045 and "cerdip" 4046 package type values to further refine his search to look for components with those type packages, and eliminate components with, for example, "cerquad", "MDIP", "CQJB", "LCC", and "CPGA" type packages.
- 10  
15

- Guardrails (alternatively referred to as guardrail counts, or attribute counts) provide information to the user about how many instances exist in the knowledge base that have each specific predefined possible value for such Boolean attributes, enumerated attributes, or enumerated set attributes. Instead of the display shown in the dialog window 4041 of Figure 20, a user would see the display of a dialog box that would give, in addition to the possible package type values, an indication beside each package type of how many instances in this class have each possible value. For example, in Figure 36, the color attribute 754 may be selected, and a dialog box 753 would show, not only the color values that are possible, but also how many instances of each exist. Thus, the user knows immediately, without doing another search, how many instances have each parameter value for the selected attribute. This can lead the user to structure the next search more effectively when selecting additional search criteria 740 by avoiding values that are contained in no or very few instances (thus the concept of "guardrails" as information that keeps the user from "falling off" the knowledge base by searching for something that doesn't exist), as well as provide an indication of the distribution of values for that attribute 754.
- 20  
25  
30

Referring to Figure 36, the guardrails 750 show how many instances correspond to the two possible values of a Boolean "sale item" attribute 744, that is, in this example sixteen product instances are on sale, and one hundred and ninety-eight are not on sale.

Similarly, in Figure 36, guardrails 753 provide information on how many instances  
5 correspond to enumerated values for the color attribute 754. Guardrails 753 show that thirty-one instances have a "red" color attribute, eighteen instances have a "blue" color attribute, two instances have a "green" color attribute, and five instances have a "yellow" color attribute. Guardrails 753 give a searcher some advance information on the likely results of a query, and prevent the searcher from wasting time looking for instances that do not exist, such as  
10 performing a search for products that have a color attribute 754 that is "purple."

In accordance with one feature of the present invention, guardrails 750, 753 are preferably used with attributes that have a set of discrete values. The most general of these attributes is an enumerated set, which allows an instance to have multiple parameters each of whose values is from the set of valid enumerators. An enumerated attribute 754 is similar,  
15 except an instance can have only one parameter value from the set of enumerators. A Boolean attribute 744 is essentially a simple case of an enumerated attribute, having only two possible "enumerators," true and false. The mechanism for generating guardrail counts 753 works similarly for all three attribute types, with minor variations described below.

Guardrails are evaluated in the context of a specified query. A query is based at a  
20 specific class, typically the class that has been navigated to. Only the instances at that class (for a local query) or in the subtree rooted at that class (for a global query) take part in the query.

If the specified query has attribute selectors 740 set, they form the set of search criteria that are applied against the candidate instances. Only those instances that meet the search  
25 criteria are considered in the guardrail counts 753. In this manner, each guardrail count 753 represents the number of instances that meet the current query criteria 740 and also have that specific attribute value 753.

When the search criteria 740 are modified, the guardrail counts 753, 750 may need to be updated. Actuating the "attribute counts" button 757 shown in Figure 36 causes the  
30 guardrail counts in the dialog boxes 750 and 753 to be updated when new search criteria 740 have been set.

As will be appreciated from the more detailed description below of the present methods for computing guardrail counts, special attention must be given when applying a specified

query if a query selector refers to an attribute that is being guardrailed. In that case, the "associated-selector" does not take part in the application of the query for that attribute. This is performed in a preferred method, because a guardrail count is meant to indicate the number of instances that meet the query criteria where each instance has that specific parameter value, and only that value, for that attribute. For example, in Figure 36, the guardrail count 753 for the color attribute 754 shows a count of thirty-one for the value "red," which is intended to indicate the number of instances that meet the currently set query criteria 740 and which are "red" and not some other color. If an associated-selector did take part in the query, for example, the search criteria included the color attribute 754 as part of the search criteria 740, then a guardrail count would effectively yield the number of instances that met the query criteria and whose parameter value for the guardrailed attribute 754 had both the value specified in the associated-selector and the value being counted. This is not even possible for Boolean and enumerated attributes, since an instance can have only one such attribute value. However, this is possible for enumerated set attributes, in which case the semantics of the guardrails counts becomes quite complex, and the counts become meaningless in most cases.

To obtain guardrail counts, therefore, a query must be specified. In addition, guardrails must be turned "on" for one or more attributes whose guardrails counts are desired. A preferred method for determining guardrail counts will comprise steps where query selectors, if any, are then divided into two sets: those selectors that don't refer to any of the attributes are part of the base query; those selectors that do refer to an attribute are placed in a set of associated selectors.

The base query can be applied to each of the candidate instances. Then, for each guardrailed attribute, a subset of the associated selectors is applied to each instance, where the subset consists of all the selectors except the one, if any, that refers to that attribute. In a preferred method, these steps can be optimized so that selectors are applied to each instance only once even if there are multiple guardrailed attributes.

As an example, suppose that there is a class of items that have the attributes of color, size, and availability. Color is an enumerated attribute, with enumerators of "blue," "red," "yellow," and "green." Size is a numeric attribute. Availability is a Boolean attribute.

In a first example, the specified query has no selectors set, and guardrail counts are desired for color. (In other words, guardrails are turned "on" for the color attribute). The method for determining guardrail counts would include a step in which each item in the class is examined. For each item, its attribute or parameter value, if it exists, for color is found. The

number of items with each possible value (for example, "yellow") is incremented each time an item is found having that value. After all items have been examined, these steps will produce separate counts of the number of items having each of the four colors, (as well as a count of the number of items, if any, having no color value indicated in the data available in the knowledge base). Thus, there will be a count of the number of items that are "red." There will be a count of the number of items that are "blue." There will be a count of the number of items that are "green." And there will be a count of the number of items that are "yellow."

In a second example, the specified search attributes for a query set a selector for size, restricting the size to less than ten, and a selector for availability, restricting it to true. Again, in this second example, guardrail counts are desired for color. This time, for each item, the base query, which consists of both selectors (size and availability), is applied first. Only if the item meets those criteria (i.e., the item must have a size that is less than ten and the item must be available), is it then used in the guardrail counts, in the same manner as described above in the first example.

In a third example that is the same as the second example, except that in addition, guardrail counts are desired for "availability," the base query consists of only the "size" selector. In the present method for determining guardrail counts, the "availability" selector is not used to reduce the number of instances that are counted in determining guardrail counts, because it refers to an attribute that is being guardrailed. For each item, this reduced base query is applied first to eliminate instances that do not meet the base query criteria before determining guardrail counts. If an item meets the base criteria (i.e., the item has a size less than ten), then its parameter value, if it exists, for "availability" is found. The number of available items is incremented each time an item is found having a "true" value for that Boolean attribute, and the number of unavailable items is incremented each time an item is found having a "false" value for the Boolean "availability" attribute. After all items have been examined, a total count of items that are available (and have a size less than ten), and a total count of items that are not available (and have a size less than ten), may be displayed to the searcher as guardrail counts.

A preferred process for displaying guardrails is depicted in the flow chart of Figure 44. The process starts with step 734, for example, when the user actuates the "attribute counts" button 757. The next step in the process is step 791, where a determination is made as to the configuration settings for guardrails. The possible settings are "off," "limited," and "unlimited." If a guardrails "limit" may be selected to provide for the computation of guardrail



counts only if the number of instances is below a predetermined maximum number. For example, if the number of instances that meet the current search criteria is very large, the calculation of guardrail counts may be undesirable, either as excessively time consuming, or as not particularly helpful until the number of items found is reduced to a more reasonable number. In step 791, a determination is made as to what the currently selected guardrail mode is. If the "limited" mode is selected, the process proceeds to step 794, where a determination is made as to whether the instance count is less than the limit that is set. If the instance count is greater than the set limit count, guardrail counts will not be computed and the process proceeds to step 795. In step 794, if the instance count is less than the limit count, the process will proceed to step 792.

Referring back to step 791, in the event that guardrails are set in the "unlimited" mode, the process proceeds to step 792. If the "off" mode has been selected, then in step 791 the process will proceed directly to step 795.

When step 792 is executed, the enumerated and Boolean counts (which are determined following the steps described in the above three examples) are obtained. The counts are preferably placed in temporary storage until needed for display. After step 792 is executed, the process proceeds to step 795.

In step 795, a determination is made as to whether there are any attributes 739 to display. If there are attributes 739 to display, the process proceeds with step 796, where the next attribute is retrieved. A determination is then made as to whether the attribute is either an enumerated attribute (including enumerated sets), or a Boolean attribute. If not (i.e., the attribute is neither Boolean or enumerated), in step 790 the attribute 741 is drawn in the browser frame 738. The process then loops back to step 795.

In step 797, if the attribute is either an enumerated attribute or a Boolean attribute, the process proceeds to step 798. In step 798, a determination is made as to whether guardrails are "on" for this particular attribute. If not, the process proceeds to step 790, and the attribute is drawn in the browser frame. If guardrails are "on" in step 798, the process proceeds to step 799. In step 799, the attribute is drawn in a guardrail window or dialog box in the browser frame with the individual guardrail counts displayed. The guardrail counts may be retrieved from temporary storage where they were placed during step 792. Preferably, an option is available to suppress the display of attribute counts that are zero. In cases where a large number of discrete values for a guardrailed attribute are possible, when a search has been refined to the point that a relatively small number of instances appear in a query result, the

suppression of zero counts from a guardrails display can be a significant advantage. Then the process loops back to step 795.

In step 795, if there are no more attributes to display, the process completes with step 780.

5 A more detailed description of a method for calculating guardrail counts is shown in Figures 45A, 45B and 45C. The method depicted in the flowcharts of Figures 45A, 45B and 45C allows for any number of attributes that are to be guardrailed. Some simplifications to the illustrated method are possible if guardrail counts are to be computed for only one attribute, i.e., there is only one guardrailed attribute.

10 The illustrated method begins with step 511, for example, when a user actuates the attribute counts button 757. Input to the method for calculating guardrail counts consists of a query, one or more attributes whose guardrail counts are desired, and a global flag "GF" that specifies whether the instances to be examined are local to the query class (GF is false) or reside in the subtree rooted at the query class. In step 512, the input is examined for errors. If  
15 the input is not valid, the method exits with an error condition in step 513. If the input is valid, the method proceeds to step 514.

Referring to Figure 45A, first, each attribute that is to be guardrailed is examined in step 514. In step 515, each query selector that is set in the search criteria is examined to determine whether it refers to a guardrailed attribute. If no query selector refers to the  
20 examined guardrailed attribute, the method proceeds to step 514. In step 516, query selectors that refer to any of the guardrailed attributes are marked. Then the process returns to step 514.

When this processing is done, the method proceeds to step 517. The marked query selectors make up the set of "associated-selectors" that can only be applied when calculating some, but not all, of the guardrail counts. The unmarked selectors make up the base query, and  
25 can be applied against every instance. The item identified with reference numeral 518 in Figure 45A is intended to represent the same point in the flowchart as item 518 in Figure 45B. After step 517 in Figure 45A, the method proceeds to step 519 in Figure 45B.

In step 519 shown in Figure 45B, the list of candidate instances is preferably created in the same manner that is used for any query. A flag "GF" is used to specify the scope of the  
30 search. If the flag "GF" is false, the list of candidate instances comprises only the instances that are local to the query class. If the flag "GF" is true, the list of candidate instances comprises the instances that are included in the query class or any subclass of the query class.

Each candidate instance is then examined in step 520 one at a time. In step 522, if the candidate instance does not meet the base query search criteria, it is discarded and the method returns to step 520 where the next candidate instance is then examined. Indexing techniques are applied, as appropriate, against the base query selectors to reduce the list of candidate instances. In other words, instances that do not meet the search criteria specified by the base query selectors are eliminated from consideration and are not counted when determining guardrail counts. If a candidate instance meets the criteria of the base query, it will be used in the guardrail counting and the method proceeds to step 523.

Optimization steps are preferred when there are multiple associated-selectors and/or multiple attributes in the list of guardrailed attributes. A determination of whether such conditions exist is made in step 523. If so, the method proceeds to step 524. Each associated selector is then applied against the instance and the result is saved. In this manner, these selectors need only be applied once against the instance, instead of once for every attribute in the list of guardrailed attributes. Specifically, in step 524 each selector from the group of associated selectors is examined. In step 525 a determination is made whether the instance meets the criteria of this selector. If it does, the result of the comparison is saved in step 526, i.e., an appropriate flag is set to "true," and the method returns to step 524. If it does not meet the criteria, the result of the comparison is saved in step 527, i.e., an appropriate flag is set to "false," and the method returns to step 524.

When this instance has been compared against each applicable selector and the results saved, the method proceeds to step 538 shown on Figure 45C. Alternatively, if in step 523 there is only one guardrailed attribute and only one associated selector, the method proceeds to step 538 bypassing steps 524, 525, 526 and 527. The item identified with reference numeral 528 in Figure 45B is intended to represent the same point in the flowchart as item 528 in Figure 45C.

Referring to Figure 45C, guardrails counts are calculated for each attribute that is a guardrailed attribute, one at a time. This is done by applying all of the selectors in the associated selectors against the instance, except for any selector that refers to the guardrailed attribute. If the instance meets these additional criteria, then it has met all of the applicable query criteria, and the count of such instances is incremented.

Specifically, in step 538, each attribute from the list of attributes that are guardrailed are examined. In step 530, each selector from the list of associated selectors is examined. In step 531, a determination is made as to whether the selector refers to this attribute. If it does, the

method returns to step 530. If it does not, the method proceeds to step 532, and a determination is made as to whether the saved results from previous steps 524, 525, 526 and 527, if applicable, are "true." If the saved results are "true," the method proceeds to step 530. If the saved results are not "true," the method proceeds to step 538.

5        When this processing is done, the method proceeds to step 533, and this instance can be incorporated into the guardrail counts for the attribute. In step 534, the instance is checked to see whether it has a value associated with this attribute. If this instance does not have a parameter that is associated with this attribute, then the count of undefined instances for this attribute is incremented in step 535, and the method proceeds to step 538.

10        In step 534, if this instance has one or more (for enumerated sets) parameters that are associated with this attribute, then for each such parameter the parameter value is obtained in step 536, and the count of instances having that value for this attribute is incremented in step 537. The method returns to step 538.

15        When all of this processing has been done, the method returns (via item 529) to step 520 shown in Figure 45B. In step 520, after all instances have been examined, the method is completed at step 521.

20        An additional optional optimization may be made in the method for computing guardrail counts. Each attribute in the list of guardrailed attributes that has no associated-selectors that refer to it may be marked as "clean." At each instance, the full query that needs to be applied (the base query plus the appropriate associated-selectors) is then the same for all of the clean attributes, since for each of them all of the associated-selectors are applied. This result can be calculated once, and then used for each clean attribute each time a result is needed.

#### An Example of an Object Oriented Knowledge Base Server

25        The present invention may be advantageously employed to provide remote access, navigation, and query of a remotely located object oriented database management system. An embodiment of a suitable object oriented database management system that may be used as a knowledge base server 5130 will be described below.

30        In the embodiment of an object oriented database management system shown in more detail in Figure 6. A preferred embodiment of a knowledge base server 132 includes an object oriented lock manager 125, a dynamic class manager 134, a connection manager 135, a query manager 136, a handle manager 137, a units manager 138, a database manager 139, and a file manager 140. A knowledge base client 131 may interact with the knowledge server 132 over a

local area network 100, as shown for example in the illustrated client 112 shown in Figure 1, or over the Internet 5124, as shown for example in the illustrated client 111 shown in Figure 1.

As shown in Figure 6, a preferred system includes a registry server 141 and a license manager 142 to control unauthorized access to the system. The license manager 142 may be

5 implemented as a license manager server 104, shown for example in Figure 1. Referring to Figure 6, a legacy client 133 and a legacy manager 145 may be included to facilitate organization of an existing legacy database into schema for use in connection with an object oriented database management system. An application programming interface or API 143 is also shown in the illustrated embodiment.

10 A schema editor 144 is preferably provided for modifying and changing the schema or database 123. Of course, it will be appreciated that not all users will be allowed to make changes in a schema in many applications, and a schema editor 144 is not provided for users who do not have access rights that permit them to modify the schema. The structure and operation of the schema editor 144, the dynamic class manager 134, the retriever 130, the  
15 connection manager 135, the query manager 136, the handle manager 137, the units manager 138, the database manager 139, the file manager 140, the registry server 141, the license manager 142, the API 143, and the legacy manager 145 are described in more detail in application Serial No. 08/339,481, filed Nov. 10, 1994, by Thomas S. Kavanagh, et al., for OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM. A knowledge base client  
20 131 especially adapted for use over a local area network is also described in application Serial No. 08/339,481.

In the example illustrated in Figure 1, a plurality of users or clients 112 and 118 are shown connected to the network 100. A first client 111 is shown coupled to the Internet 5124. The first client implementation 111 in this particular example uses a Sun Microsystems  
25 SPARCstation 111, which is shown having a display 116, a mouse 117, and a keyboard 122. However, the first client 111 is not limited to any particular hardware configuration, but may run on a wide variety of platforms. A second client implementation 112 in this particular example uses an IBM compatible computer 112, shown having a display 113, a mouse 114, and a keyboard 115. A third X Windows implementation of a client 118 is illustrated in this  
30 particular example having a computer 118, a display 119, a mouse 120, and a keyboard 122. Each of the illustrated client implementations 111, 112, and 118 provide examples of suitable platforms for a client 5121, and it should be understood that the particular platforms are considered to be interchangeable in this example. The executable content client 5121 is

intended to be implemented to run in a virtual machine environment. The executable content client 5121 is therefore independent of the particular hardware platform used, and may be supported by a large number and wide variety of platforms.

The illustrated system may support interactive editing by one or more users connected through respective clients 131. For example, users are able to use a schema editor 144 to change the schema by adding and deleting attributes, to add whole sections to the schema, to reposition whole sections of the schema within the schema hierarchy, and to modify, add, and delete classes and instances. The process of adding classes or instances may be facilitated by automatically deriving class names and descriptions in accordance with the system described in application Serial No. 08/526, 555, filed Sept. 12, 1995, by Thomas S. Kavanagh et al., for IMPROVEMENTS IN AN OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM.

Interactive editing operations may be performed while other users are simultaneously using retrievers 130 to access the database 123. The management of these simultaneous operations, including the ability of the plurality of users to access the database 123 while a plurality of users are at the same time making changes to the database 123, is provided by a concurrency control system including the object oriented lock manager 125. The example described herein works well for a read oriented database system, but is not necessarily limited to such systems. It is particularly advantageous in a knowledge base schema that is used for parts management. The concurrency control system is described in more detail in application Serial No. 08/527,161, filed Sept. 12, 1995, by Thomas S. Kavanagh, et al., for METHOD AND APPARATUS FOR CONCURRENCY IN AN OBJECT ORIENTED DATABASE.

Figure 46 shows an example of a screen that may be displayed on the user's display 116 when the user is navigating a class tree 248. A root class 245 is designated class 1 in the display. Class 240 is a descendent of the root class 245, and is designated class 2 in the display. Class 241 is also a descendent of the root class 245, and is designated class 3 in the display. In addition, class 247 is a descendent of the root class 245, and is designated class 6 in the display. Class 241 has two descendants: class 246 and class 243. Class 246 is designated class 4 in the display shown in Figure 46. And class 243 is designated class 5 in the display. In the illustrated example, the user selected class 243. Assuming that any required locks are granted in a concurrency control system, when the class 243 becomes the selected class, it is preferably displayed in a highlighted fashion 244, and associated attributes 242 are displayed.

Referring to Figure 46, in opening a class to view subclasses, the user double clicks on the class 241 to be opened. As shown in Figure 47, the display of the class 241 changes from a

closed folder (such as is shown in Figure 46 for class 240) to an open folder 241, and all subclasses 246 and 243 are displayed. Figure 47 shows the screen display during the process of adding a part under these circumstances. When a part is added in a preferred embodiment, the step of opening an add part window 275 shown in Figure 47 is performed. Figure 48 depicts an example of a screen display when editing a part. Figure 49 illustrates a screen display for a preferred embodiment showing a schema developer window. Figure 50 illustrates a screen display for a preferred embodiment showing a search results window.

Figure 7 shows the major components of a computer hardware configuration 109 providing the computational and communications environment for a knowledge base server 132. This configuration consists of a central processing unit or CPU 2109 which includes an arithmetic logical unit 2100 which fetches and executes program instructions from main memory 2101. The programs are stored on a disk drive 110, access to which is provided through a disk controller 2106. The knowledge base files 123 are also stored on disk drive 110 and accessed through virtual memory addresses 2112 in main memory 2101, through which, when required, a page 2111 of contiguous data in a disk file 2108 is copied into main memory 2101. In this example, the use of virtual memory 2112 for the knowledge base management system is preferred. The knowledge base server 132 interacts with the client API 143 through a local area network 100, access to which is controlled by network controller 2102, or through a wide area network 2104, access to which is controlled by a serial interface controller 2103. An I/O bus 2105 mediates data transfers between the CPU 2109 and the peripheral data storage, interface and communication components.

Figure 8 shows the major components of a computer hardware configuration 112 providing the computational and communications environment for a retriever 130, schema editor 144, a graphical user interface component of legacy 133, and an API 143. This configuration consists of a central processing unit or CPU 2109 which includes an arithmetic logical unit 2100 which fetches and executes program instructions from main memory 2101. The programs are stored on one or more disk drives 2110, access to which is provided through a disk controller 2106. The user interacts with the system through the keyboard 115 and mouse or similar graphical pointer 114 with the graphical user interface displayed on the CRT display 113. The API 143 communicates with the knowledge base server 132 through a local area network 100, access to which is controlled by network controller 2102, or through a wide area network 2104, access to which is controlled by a serial interface controller 2103. An I/O bus

2105 mediates data transfers between the CPU 2109 and the peripheral data storage, interface and communication components.

Figure 52 shows the internal object representation for a class 800. In the present schema, a class has a parent handle 801. Every class object 800 includes stored information representing the handle of its parent class, except in the special case of the root class, which has no parent. A null is stored in this location in that case. A handle is a reference to an object. The parent handle information 801 is used by the handle manager 137 to identify the stored class object which is the parent class for the class 800.

The class object 800 includes a subclass list 802. The subclass list 802 is an array of handles which may be used by the handle manager 137 to identify those class objects which are subclasses of the class 800. In the internal representation provided in the described embodiment of an object oriented database, lists can grow virtually without bounds and are dynamic. The storage space available is not fixed.

This provides flexibility and power to the database structure, because the class object 800 may have an extremely large number of subclasses in a large database without substantial degradation in performance.

The class object 800 includes an attribute list 803. The attribute list 803 is a list of handles. The handle manager 137 may use the information stored in the attribute list 803 to identify the attributes possessed by class object 800.

The class object 800 also includes a local instance list 804, which is a handle list. Field 805 shown in Figure 52 is a pointer to a storage location of the class name, i.e., the text identifying the class.

Field 806 is used to store the handle for the class 800. The field 807 stores an indication of the class code, i.e., whether it is primary, secondary, or a collection.

The class object 800 also includes a subtree instance count 808. The subtree instance count 808 is a numeric indication of the total number of items or instances present in all of the descendants of the class 800 i.e., the total number of instances in class 800, all of the class 800's subclasses, all of the subclasses' subclasses, and so on. Thus, when a user is navigating through the tree structure of a knowledge base, as a user selects and opens subclasses, the user can be immediately informed of the number of parts found at any location on the tree by retrieving the subtree instance count 808 for the current class and passing that information to the retriever 130. The subtree instance count 808 is kept up to date whenever the knowledge



base is modified, so it is not necessary while a user is navigating through the tree structure of the database to perform a real time computation of parts found 3172.

Referring again to Figure 52, the class object 800 also preferably includes a meta parameter list or meta data list 809. The meta parameter list 809 is a string list, and may be  
5 used as a pointer to strings containing linking information, for example, the name of a file that contains a graphical display of the type of parts represented by the class 800, thesaurus information used for legacizing data, or other legacizing information.

Figure 53 depicts an example of a generic list 810. The class manager 134 uses lists of handles, lists of floating point values, lists of pointers to character strings, etc. whenever a  
10 variable amount of data can be associated with an object. Examples of lists would be items 802, 803, 804 and 809. The list 810 depicts a list of simple integers.

A list object 810 includes a pointer 812 which points to the beginning 815 of the list data 811. A list object 810 also includes a field 813 indicating the currently allocated size for the list data 811. The list object 810 also includes a field 814 containing information indicating  
15 the amount of list data 811 currently in use.

The list data 811 contains the actual list of values. The first item 815 in the list in this example contains the value "5". Similarly, in this example list items 816, 817, 819, 820 and 821 contain additional values. List items 822, 823, 824, 825 and 826 in this example are not currently in use and are set to zero. In this illustrated example, the currently allocated size 813  
20 of the list is twelve. The amount in use 814 of the list is seven, meaning that the first seven items in the list are valid.

Figure 54 illustrates the data structure for attribute data 827. An attribute object 827 contains at least six fields in the illustrated embodiment. A first field 828 contains a pointer to an external name comprising an ASCII character string that is the name for the attribute. The  
25 attribute object 827 also contains a field 829 containing the handle for this attribute object 827. The attribute object 827 also contains a field 830 which contains the handle of the class that defines this attribute 827. The fourth field 831 is a Boolean indication of whether this attribute is a required attribute for the defining class. A fifth field 832 contains a Boolean field indicating whether this attribute is protected. This is preferably indicated by display of a  
30 protected icon. In the data structure of the attribute object 827 shown in Figure 54, this information is stored in field 832. The attribute object 827 also contains a field 833 which is a meta parameter list.

Enumerated attributes include fields 828 - 833, indicated collectively as attribute data 834, plus a field 835 which is a list of enumerator handles.

In the case of a Boolean attribute, only fields 828 - 833 are used, which are again indicated collectively in Figure 54 as attribute data 834.

5        Numeric attributes include fields 828 - 833, indicated collectively as attribute data 834, plus a field 838 which contains the handle of the unit family for this numeric attribute.

In the case of a string attribute, and in the case of a string array attribute, only the attribute data 834 comprising fields 828 - 833 is included.

One example of the use of these data structures by the dynamic class manager 134 is the  
10        procedure of a user selecting a class by clicking on the closed folder icon 3189 associated with the class. When a class is opened, the dynamic class manager 134 will check the class object 800 and retrieve the attribute list 803. The handles stored in the attribute list 803 will be passed to the handle manager 137. The handle manager 137 will return the virtual memory address for each attribute 827 of the class. The dynamic class manager 134 may then use the  
15        pointer 828 to the external name of an attribute object 827 to retrieve the character string text for the external name for the attribute. That ASCII text information can then be passed through the API 143 so that it may eventually be provided to the retriever 130 for display to a user on the display 116.

Figure 55 illustrates the data structure for an enumerator object 841. An enumerator  
20        object 841 may comprise three fields. A first field 842 contains a pointer to the external name for the enumerator object 841. A second field 843 contains the handle for the enumerator object 841. A third field 844 may contain a meta parameter list 844. Handles are used to link from other objects to the enumerator object 841. An advantage of this structure is the ability to easily modify a knowledge base if it becomes desirable to change the external name of an  
25        object. Such a change need only be performed once to the ASCII character string that is used to represent the external name. All other objects merely contain a handle which can be used by the handle manager 3137 to provide the dynamic class manager 134 with the actual external name.

Figure 56 depicts the data structure for an instance 871 and associated parameters 872.  
30        An instance object 871 may contain four fields 873 - 876. The first field 873 is the handle for the owner class of this instance. The second field 874 may give the ordinal location of this instance's handle in the instance list 804 of its owning class. The third field 875 is a list of parameters, which points to the values contained in 877. The fourth field 876 is the handle for

the instance object 871. The list of parameters 877 contains a plurality of pointers to parameters for the various attributes associated with this instance object 871. In the example illustrated in Figure 56, the list 877 contains three entries 878, 879 and 880. Additional elements of the list 877 have been omitted for clarity. The pointer 878 in list 877 points to information concerning the associated parameter 872. The data structure for the parameter 872 is illustrated in more detail in Figure 57.

Figure 57 shows the data structure for five different types of parameters: enumerated, Boolean, numeric, string and string array. Each of the parameter objects 872 has an attribute handle 881. An enumerated object 888 has an attribute handle 881 and an enumerator handle 882. A Boolean object 889 has an attribute handle 881 and a Boolean value 883. A numeric parameter object 890 has an attribute handle 881, a unit handle 884 and a value 885. For example, if the numeric parameter is 10 ohms, the unit handle 884 would be the handle for the ohms unit, and the value 885 would be 10. A string parameter 891 contains a field for the attribute handle 881 and a pointer 886 to an ASCII character string. A string array parameter 892 contains an attribute handle 881 and a field 887 that points to a list of pointers to string arrays.

Figure 58 is an example of a schema with instances. The example has a class named "electronics", which has a subclass 800' named "capacitors". The capacitors subclass 800' has an attribute 827 called "case type". There are two possible types of cases in this example, which are referred to as "case A" and "case B". The subclass capacitors 800' has a subclass 800' named "electrolytic". The electrolytic subclass 800' has an attribute 827' called "voltage rating", and one instance 871' is provided that has parameters 890 and 888 of 5 volts and a type B case, respectively. Most objects and lists are shown incomplete in order to simplify the illustration, it being understood that like reference numerals refer to the same objects described in connection with Figure 52, Figure 53, Figure 54, Figure 55, Figure 56 and Figure 57.

In Figure 58, the class object 800 has a name 806, which in this case is "electronics". The class object 800 has a field 802 which points to a list of subclasses 893. The list 893 has a first entry 894 which is the handle for the subclass 800'. In this case, the name 806' of the subclass 800' is capacitors. Of course, all references to schema objects actually use handles (not shown in Figure 58) and actually go through the handle manager 3137 and handle table. This is not shown in Figure 58 in order to simplify the diagram.

The subclass 800' capacitor has a field 802' which points to a list of subclasses 893'. The list 893' has an entry 894' which is the handle for subclass 800". The name 806" for

subclass 800" is electrolytic. The subclass 800" has a null entry in the field 802" which would normally contain a pointer to a list of subclasses, if any. In this example, the subclass 800" does not have any subclasses.

Returning to the capacitors subclass 800', field 803 contains a pointer to a list of  
5 attributes 897. The list 897 contains the handle for the enumerated attribute 827 called "case type". Field 830 of the enumerated attribute object 827 contains the handle of the defining class 800' called capacitors. The enumerated attribute object 827 contains a pointer 835 which points to a list 839 of handles for enumerators. In this example, the list 839 contains a handle 898 for the enumerator 841. The enumerator 841 contains a pointer 842 to the external name  
10 for this enumerator, which may be an ASCII string for "case A". Similarly, item 899 in the list 839 points to enumerator 841' associated with case B.

Returning now to subclass 800" named electrolytic, the pointer 803" points to a list 897' of attributes, and one of the fields in the list 897' contains the handle for numeric attribute 827' which is "voltage rating". The numeric attribute 827' contains a field 830' which  
15 contains the handle of the defining class which in this example is the class 800" named electrolytic. The numeric attribute object 827' also contains a field 838' which contains the handle of the voltage unit family 845 (see Figure 59).

Returning to the electrolytic class 800", a field 804" contains a pointer to a list 895 of handles of instances. Item 896 in the list 895 contains the handle associated with instance 871.  
20 Instance 871 contains a field 873 which contains the handle of the owning class, which in this case is the electrolytic class 800". The instance data object 871 also contains a field 875 which points to a list of parameters 877. The list 877 contains a pointer 878 which points to the numeric parameter 890. The numeric parameter 890 contains a field 881 which contains the handle of the attribute 827' (voltage rating). The numeric parameter object 890 also contains a  
25 field 884 which has the handle of the units, which in this case is "volts". For simplicity, the unit object is not shown. The numeric parameter object 890 contains a field 885 which contains the value 5.0. In this instance, the electrolytic capacitor is rated at 5.0 volts.

The parameter list 877 contains a pointer 879 which points to the enumerated parameter 888. The enumerated parameter object 888 contains a field 881' which contains the handle of  
30 the attribute, which in this instance is case type. The enumerated parameter object 888 also contains a field 882 which is the handle for the enumerator 841'. In this example, the electrolytic capacitor rated at 5.0 volts has a type case B.

The data structure described herein has significant advantages. Referring to Figure 58, it is easy to change a name or description in this data structure. Consider an example where the database may contain 1,000 instances of capacitors with a type B case. If the type B case is discontinued, or the name changed to "re-enforced", the only change that would need to be made would be to replace a single ASCII string representing the name for that case type. All 1,000 instances in the database simply contain a handle that the handle manager 3137 associates with that ASCII text string. No other changes need to be made in the database.

Another advantage of the data structure in accordance with the described embodiment is that if a primary value is undefined, nothing is stored. Thus there is no wasted space.

Another advantage of the database structure is that algorithms do not have to be changed based upon location in the tree structure. All algorithms work the same regardless of location in the tree structure. The only special case is the root class. For example, the algorithm for adding an instance to the database is the same no matter where in the tree structure you are located. This makes dynamic changes to the schema very easy. A class or an entire branch of the tree structure can be moved from one location to another simply by changing lists of handles. It is not necessary to run a convert program. Everything is self contained. A class object 800 contains the handle of its parent 801 and thus knows who it's parent is. The class object 800 also contains a pointer 802 to a list of its subclasses, so it knows who its children are.

In a preferred embodiment, the value of parameters are always stored in base units. The objects in fields described do not necessarily occupy a word of memory. In a preferred embodiment, all parameters of a particular type are stored contiguously. This improves the speed of searches. For example, the case type 841' described with reference to Figure 58 would be stored contiguously with all the other parameters for case type. The numeric parameter of 5.0 volts would be stored in a different physical location in memory contiguous with other numeric volt parameters.

An important function of the dynamic class manager 134 is the ability to modify the database structure during operation. The database structure is known as the schema. The schema of the object oriented database is structured using classes. The classes contain attributes. The attributes may contain enumerators, and unit families. The ability to add, move and delete these items is important to the dynamic operation of the database.

To add a class to the schema, three items must be known: the class name, the parent of the new class, and the location within the list of subclasses to insert the new class. Figure 60A

and Figure 60B illustrate this operation. The first step 1840 converts the handle of the parent class into an actual class pointer. The parent pointer must be immediately tested in step 1841 prior to its use. If the pointer proves to be invalid, then the operation terminates at step 1842.

If the pointer is valid, the insertion index is tested in step 1843. If it proves to be invalid, the

operation is terminated in step 1844. Finally, the name of the class must be tested in step 1845 to determine if it fits the guidelines of valid class names. If the class name fails, then the

operation terminates in step 1846. When step 1845 accepts the class name, the new class can be created. A new handle is created in step 1847 first, and then the new class is created in

internal memory in step 1848. The new handle is inserted into the table of class handles in step

1849 of Figure 60B, followed by the handle being added to the parents list of subclass handles in step 1850. The last operation is to cause the file manager 140 to add the new class to the indicated parent on the secondary storage device 110.

The above description is intended to set forth one or more presently preferred embodiments and examples of the present invention. The description is only intended to provide examples of

embodiments employing the inventive concepts that are disclosed. Persons skilled in the art, after having the benefit of this disclosure, will appreciate that many modifications may be made to the particular embodiments and examples described herein without departing from the spirit or scope of the present invention. The present invention is not limited to the particular embodiments and examples described herein. The present invention is intended to be as broad

as the claims appended hereto, when properly construed.

## WHAT IS CLAIMED IS:

65

1. An apparatus for guided iterative queries of a remotely located knowledge base, including a hypertext markup language browser capable of managing executable content, said browser being adapted to provide a virtual machine runtime environment for an executable content client application, said browser being coupled to a communications circuit capable of transmitting packets of digital information according to a network protocol, a data base management system server, said server being located at a remote location, characterized in that:

an executable content client application capable of running in the virtual machine runtime environment of the browser is provided, said executable content client application having a remote procedure call mechanism written as executable content which is capable of running in the virtual machine runtime environment of the browser, said remote procedure call mechanism being capable of translating remote procedure calls into text format information that can be transmitted over said communications circuit by said browser in an HTML simulated format that appears to a remotely located HTML server as an IHTML format; and,

an interface mechanism, said interface mechanism being coupled to said communications circuit at the remote location, said interface mechanism being coupled to said data base management system server, said interface mechanism being capable of translating text information received from said executable content client application via said communications circuit from said HTML simulated format into remote procedure calls to perform queries on said remotely located data base management system server.

2. The apparatus according to claim 1, further characterized in that: said communications circuit is a wide area network.

3. The apparatus according to claim 1, further characterized in that: said executable content client application is downloadable over said

communications circuit so that said executable content client application may be transferred over said communications circuit to a browser capable of managing executable content.

4. The apparatus according to claim 1, further characterized in that:

said communications circuit is the Internet.

5. The apparatus according to claim 4, further characterized in that:  
said data base management system server comprises an object oriented  
knowledge base server.

- 5 6. The apparatus according to claim 5, further characterized in that:  
an object oriented knowledge base is provided which is associated with and  
accessible by said object oriented knowledge base server.

7. The apparatus according to claim 6, further characterized in that:  
when a user interacts with said browser and chooses to search a data base, said  
10 executable content client application is downloaded over said  
communications circuit so that said executable content client application  
runs in the virtual machine runtime environment of the browser, said  
executable content client application including a client database retrieval  
applet, said executable content client application including a graphical  
15 user interface to said client database retriever applet, whereby said user  
can interact through said graphical user interface to navigate a class  
hierarchy of said object oriented knowledge base associated with said  
object oriented knowledge base server.



464

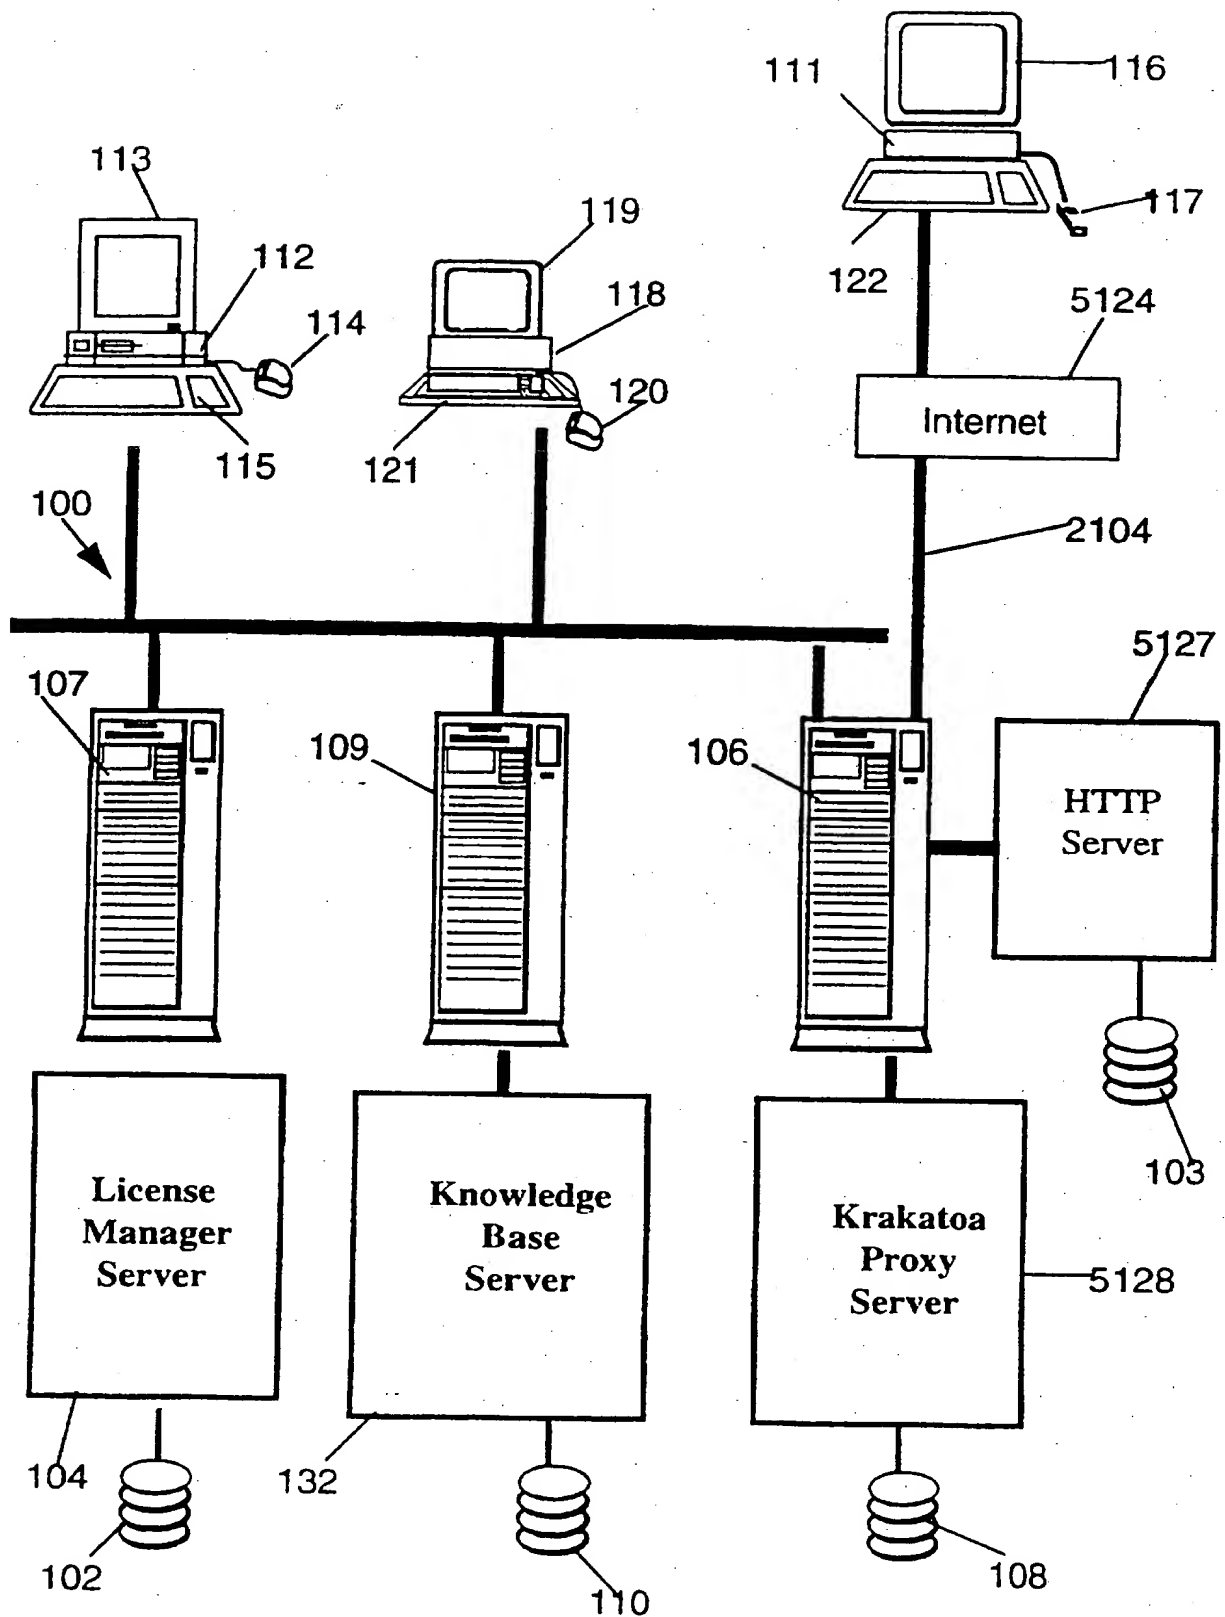


FIG. 1

2/64

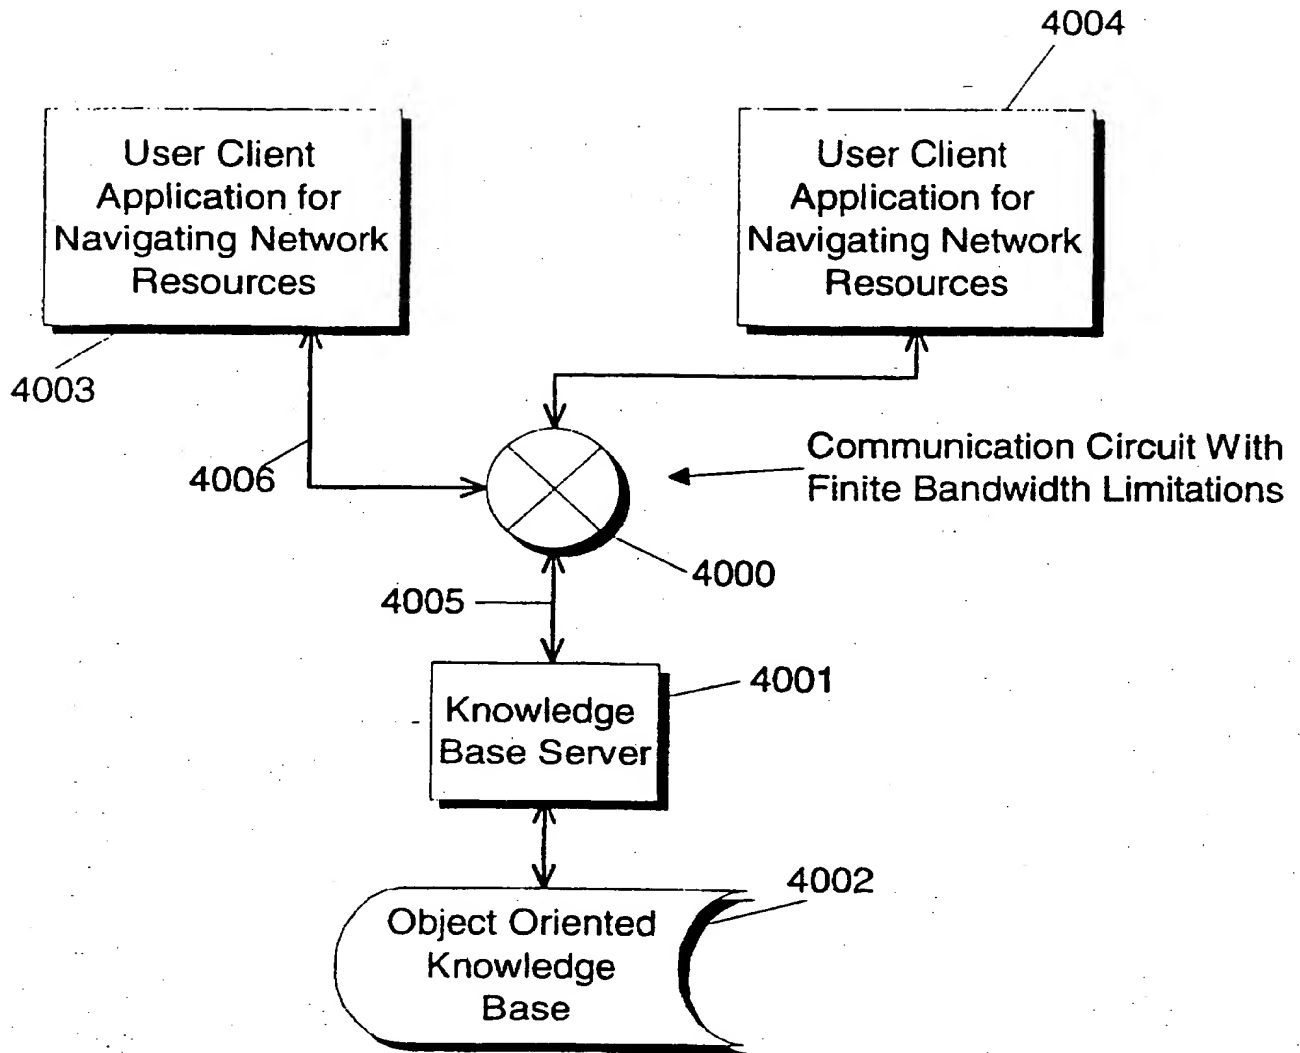


FIG. 2

3/64

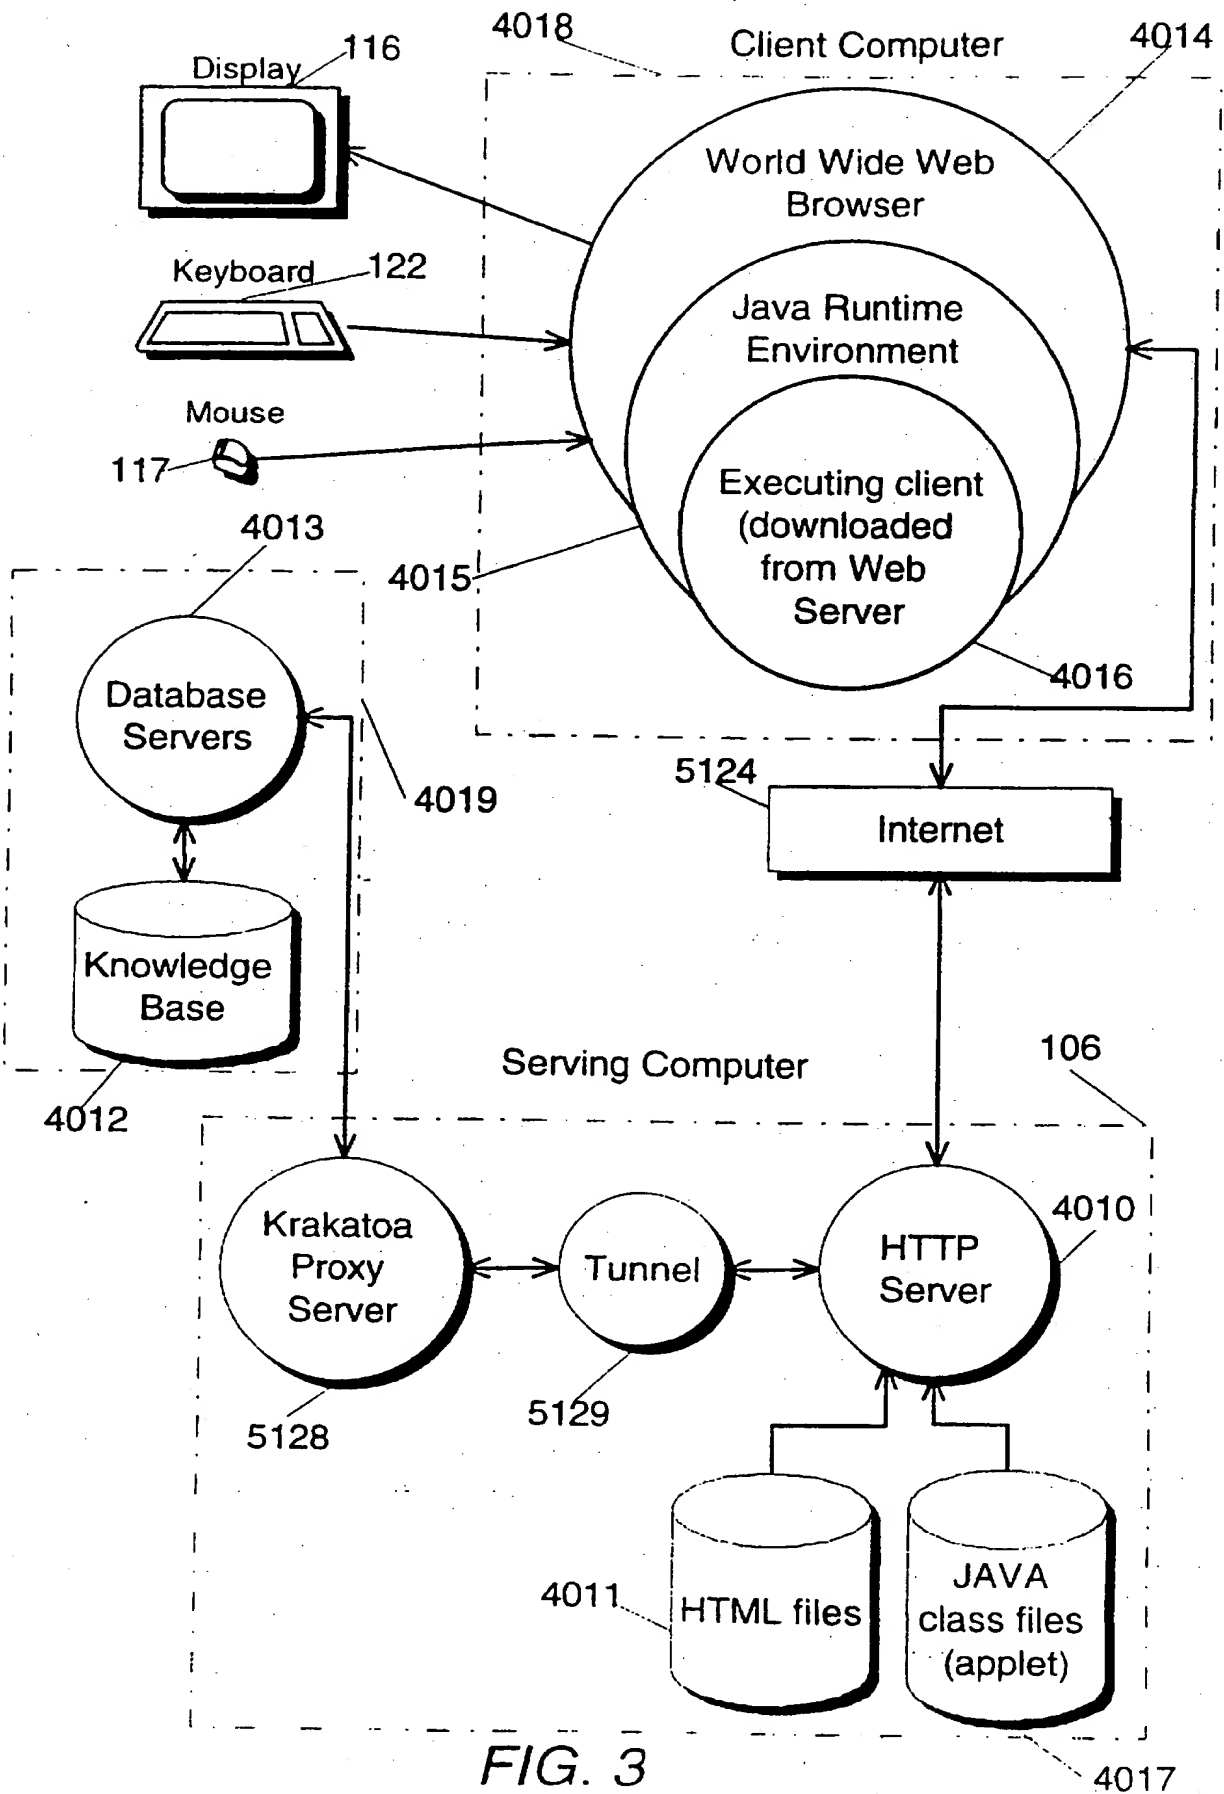


FIG. 3

4/64


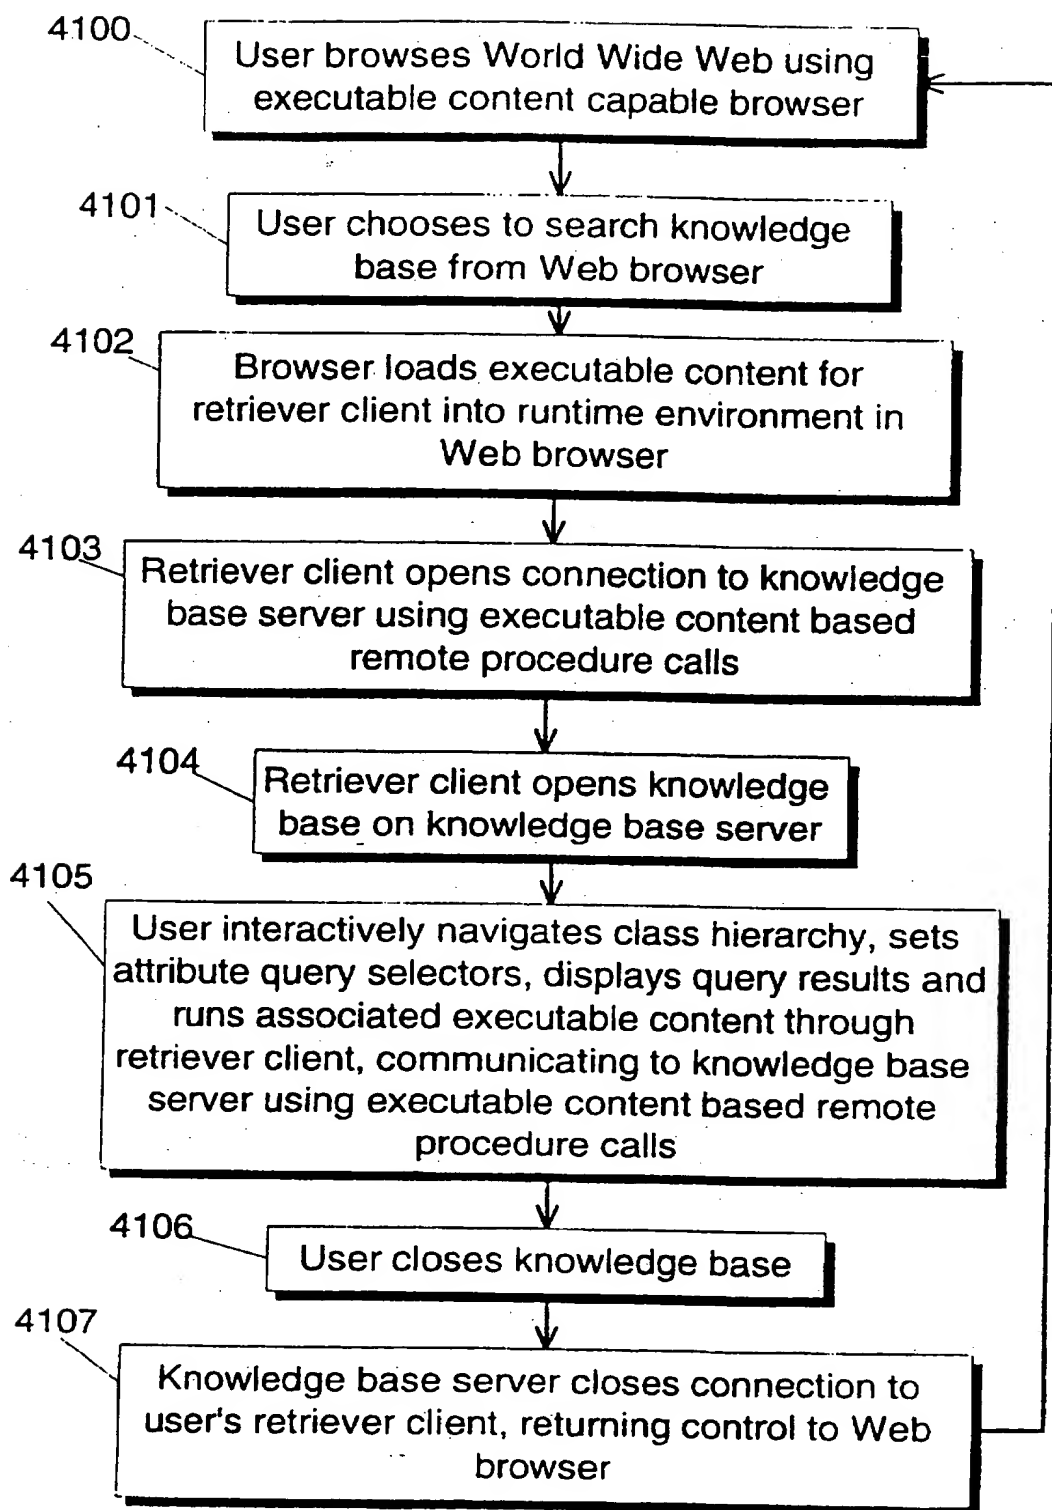


FIG. 4

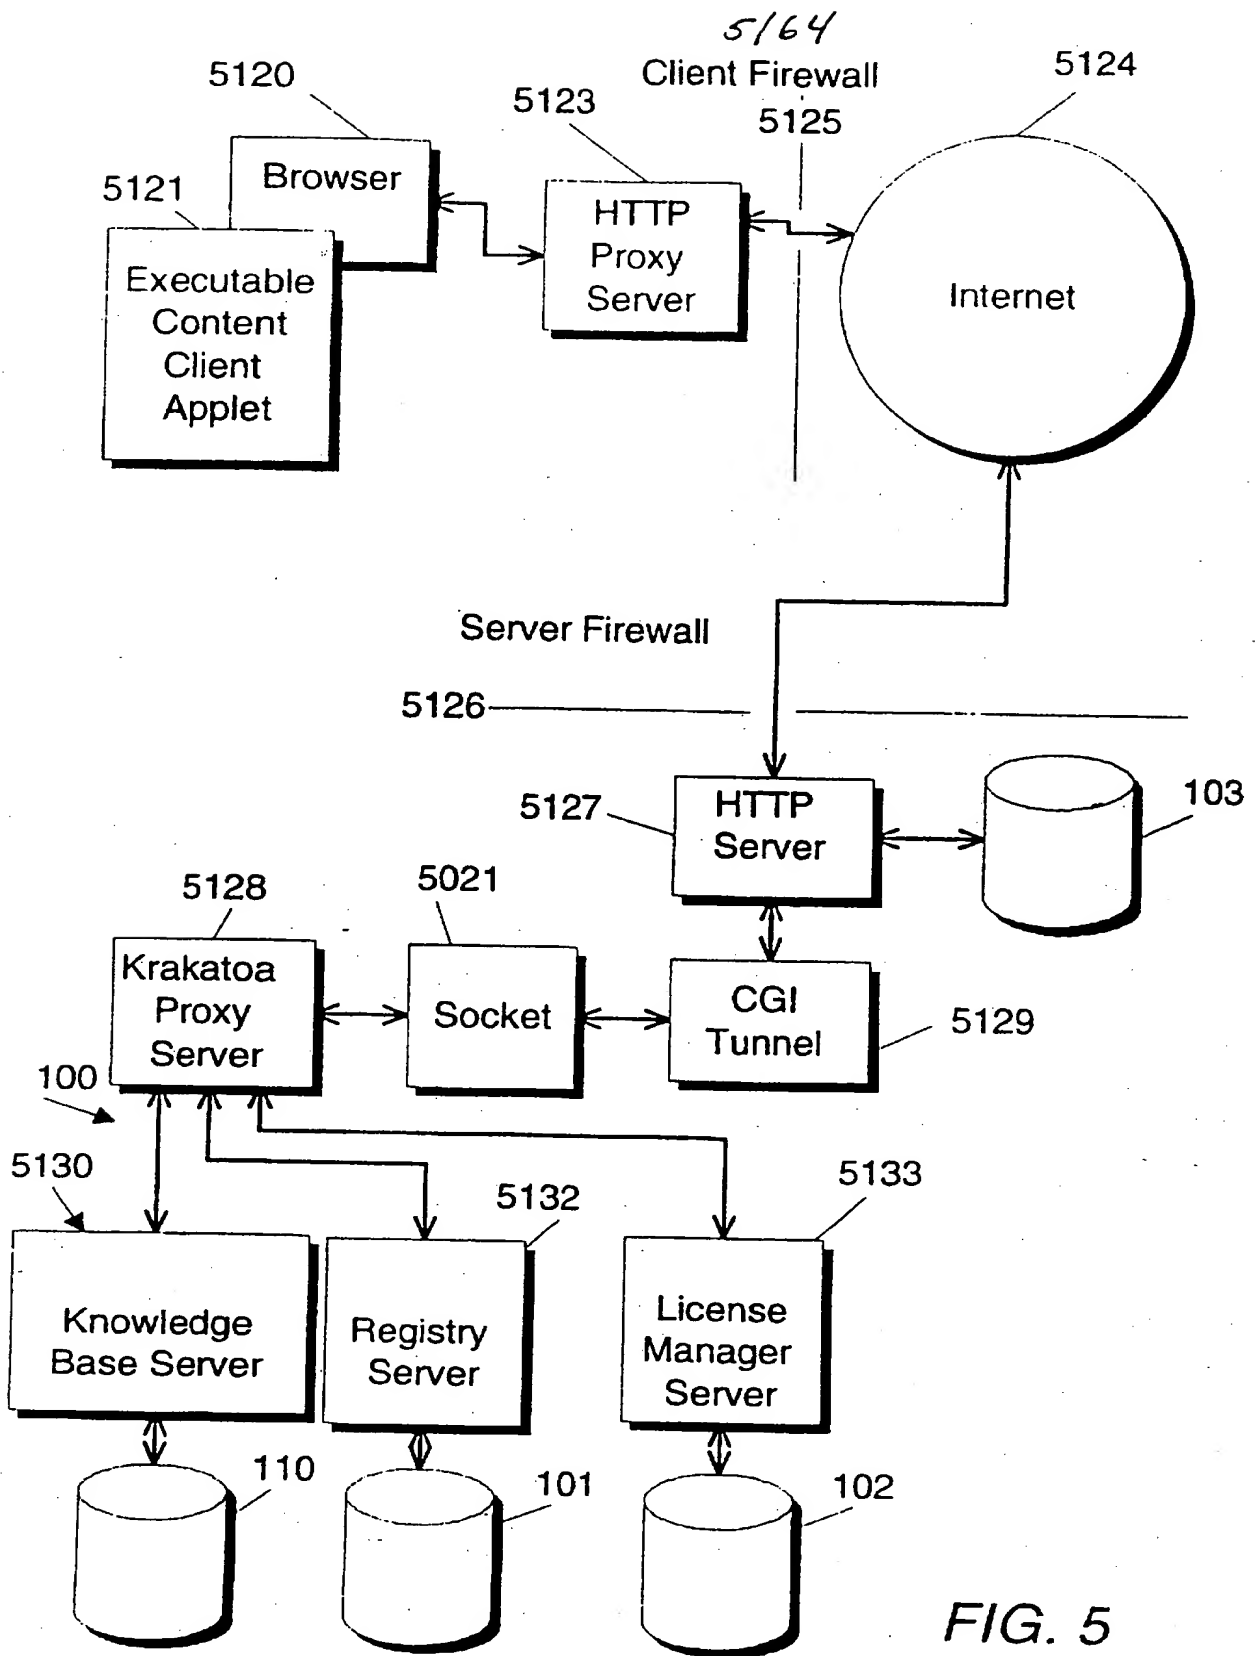

6/64

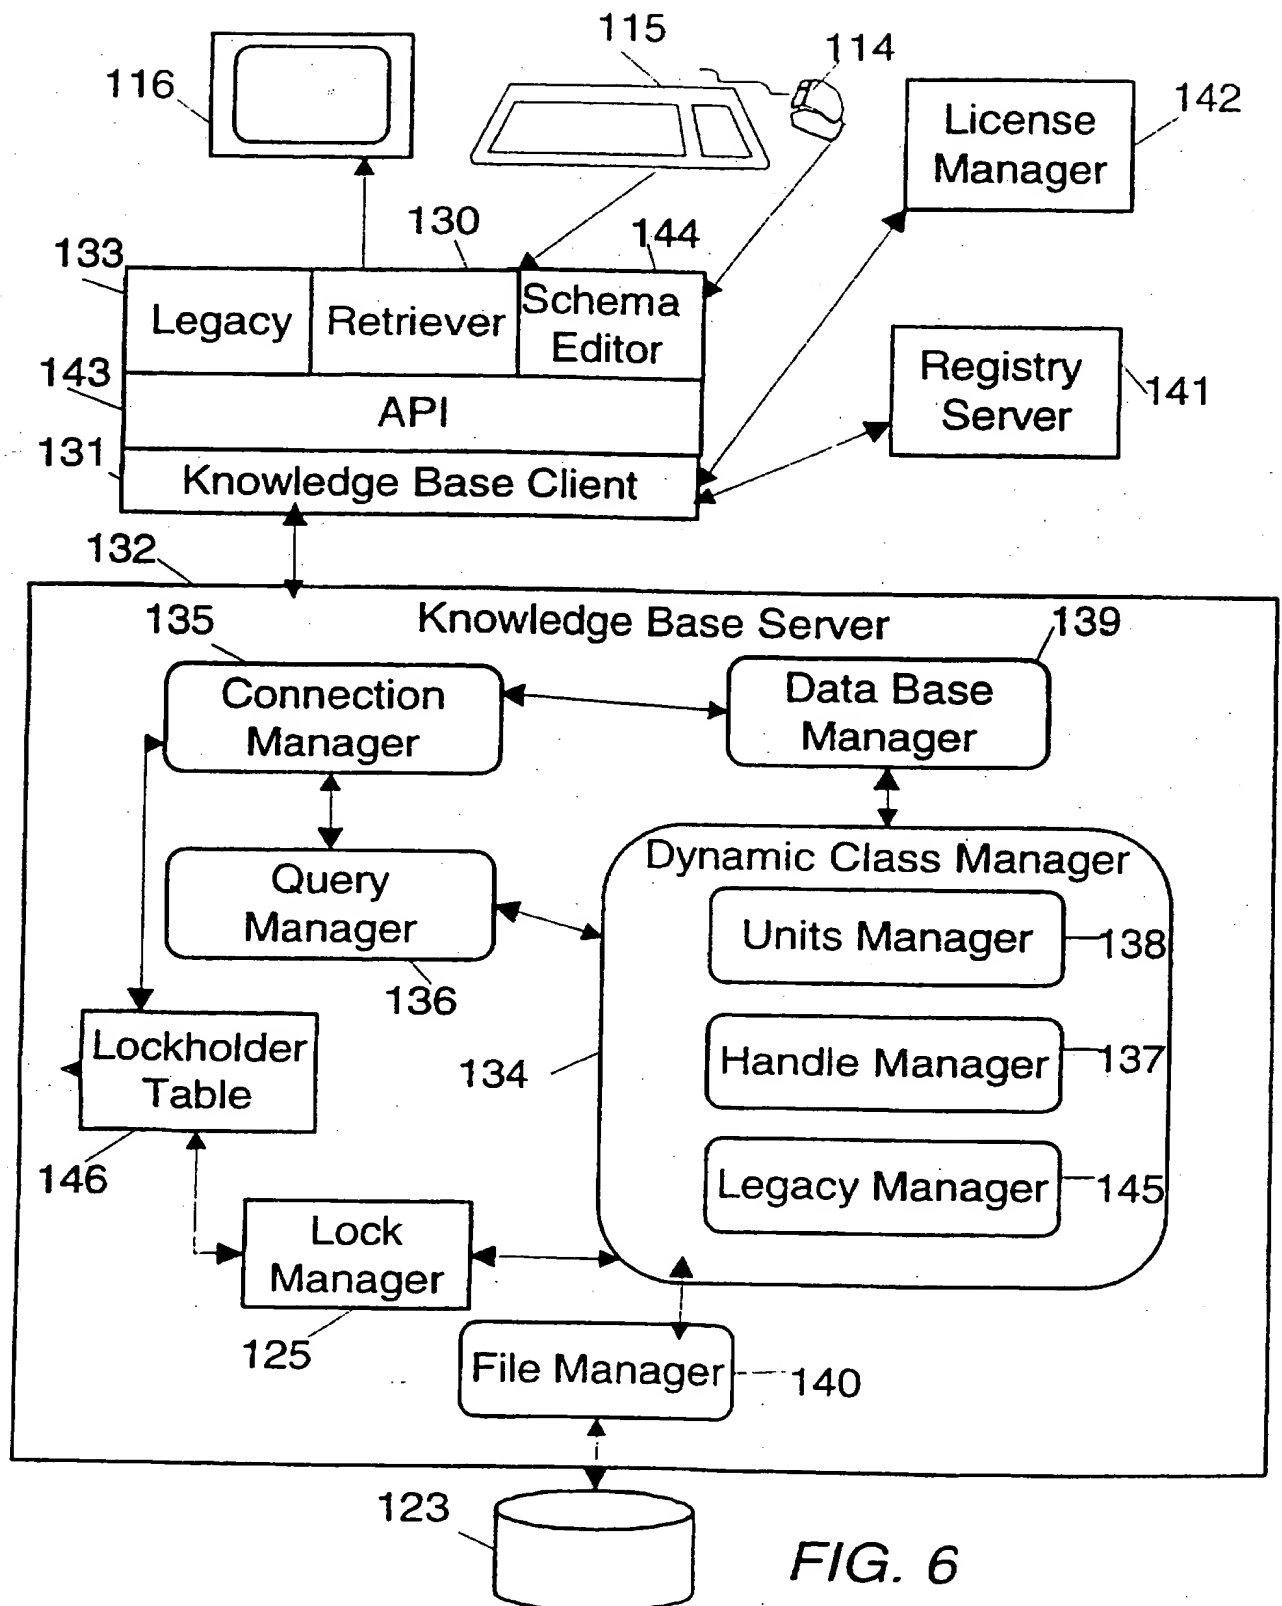


FIG. 6

7/64

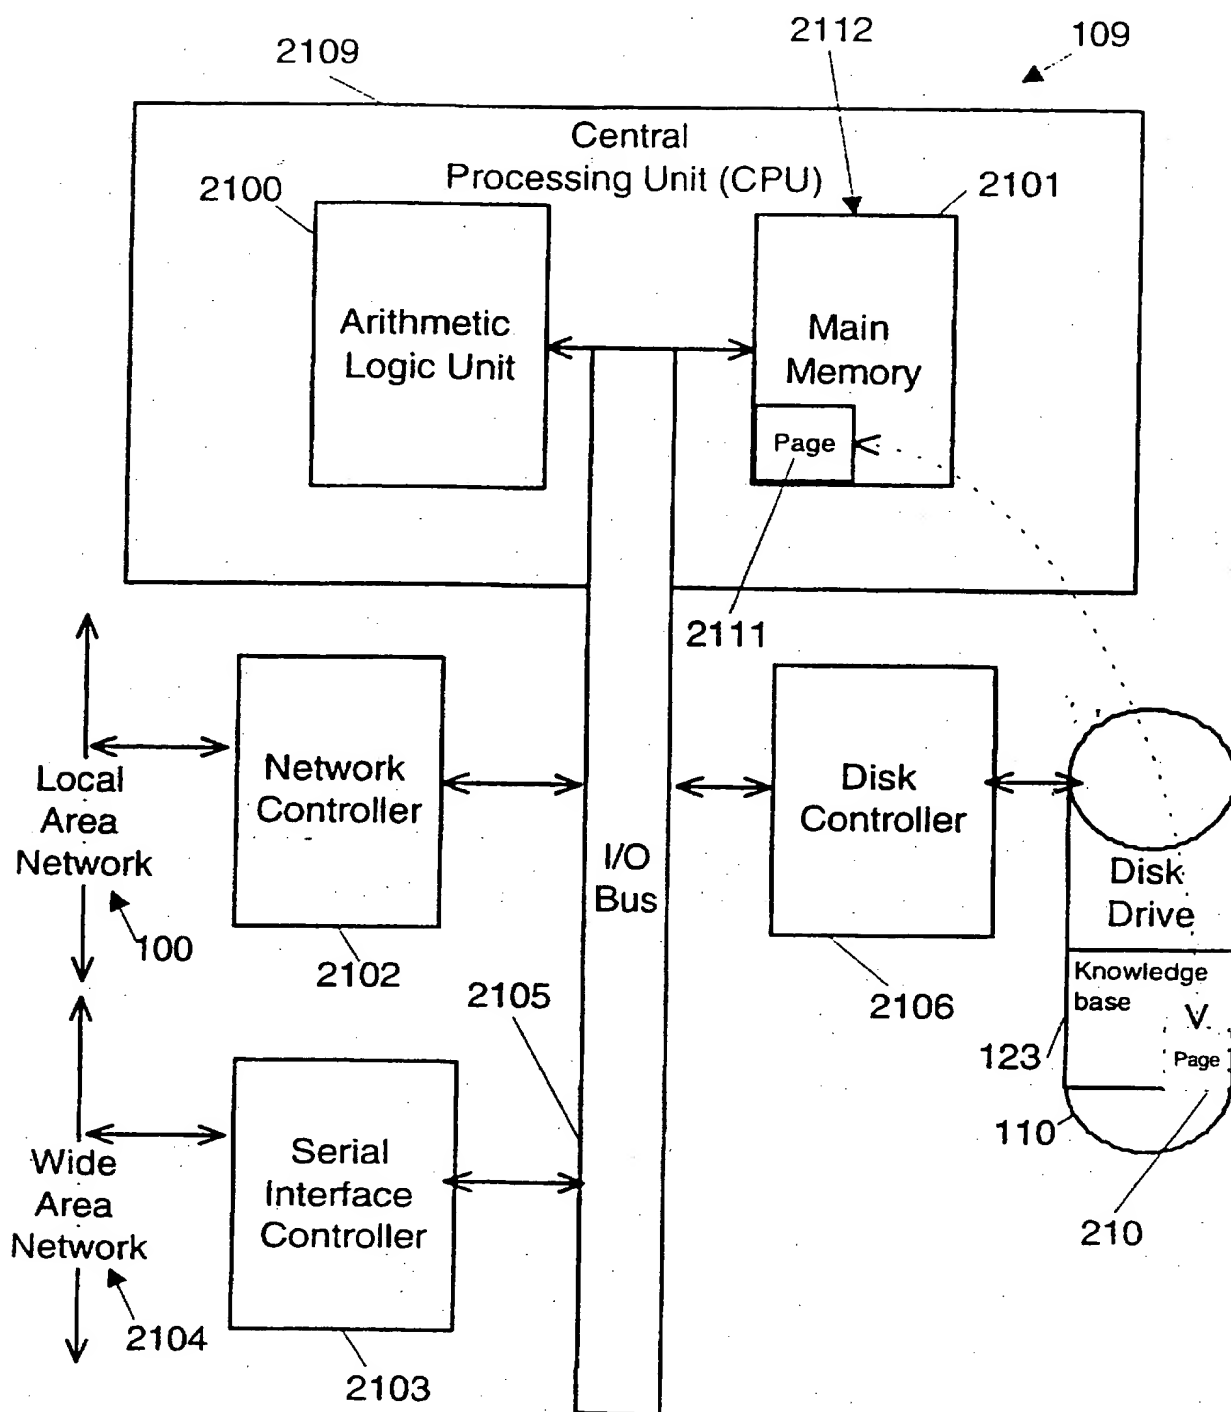


FIG. 7

8/64

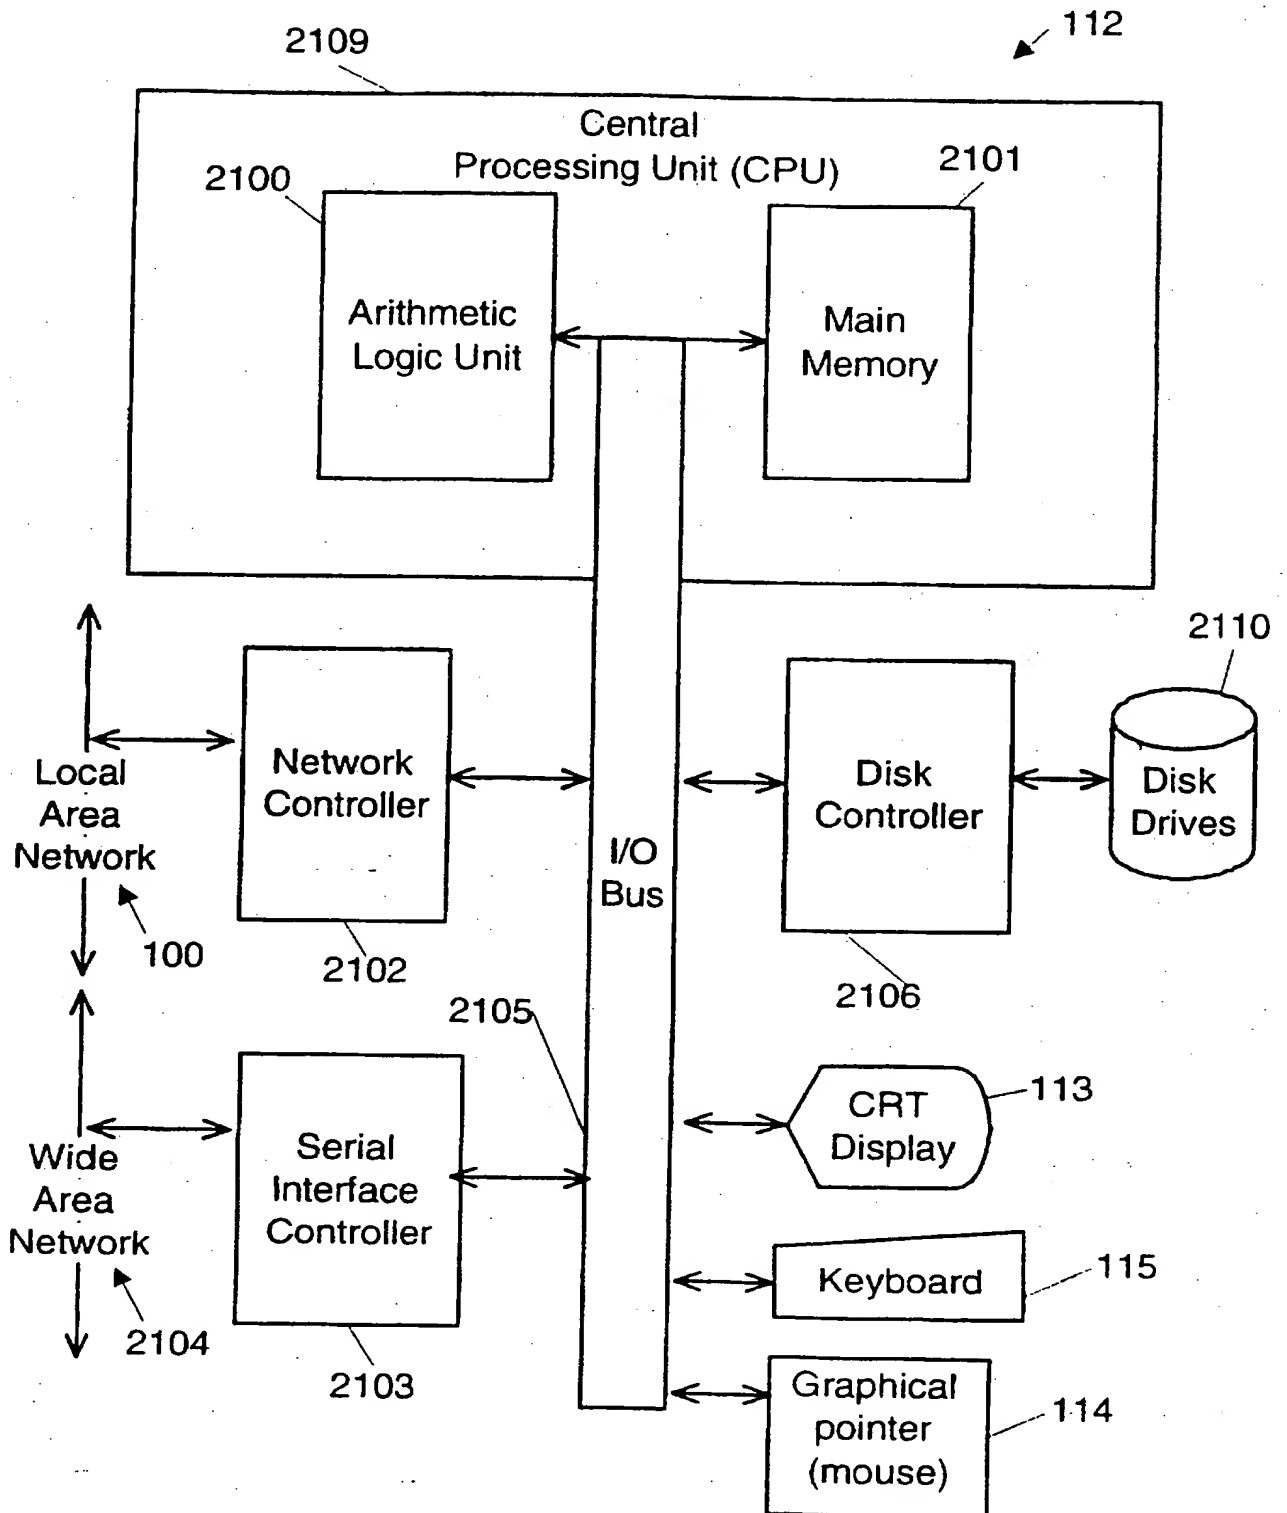


FIG. 8



9/64

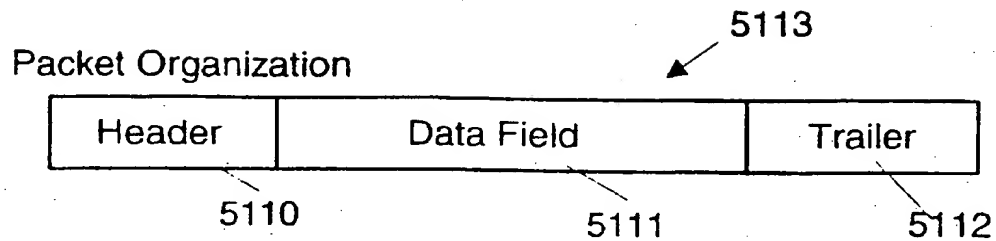


FIG. 9

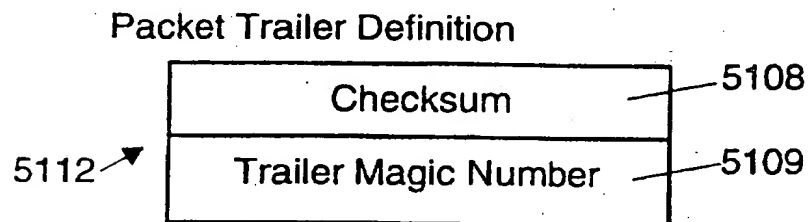


FIG. 10

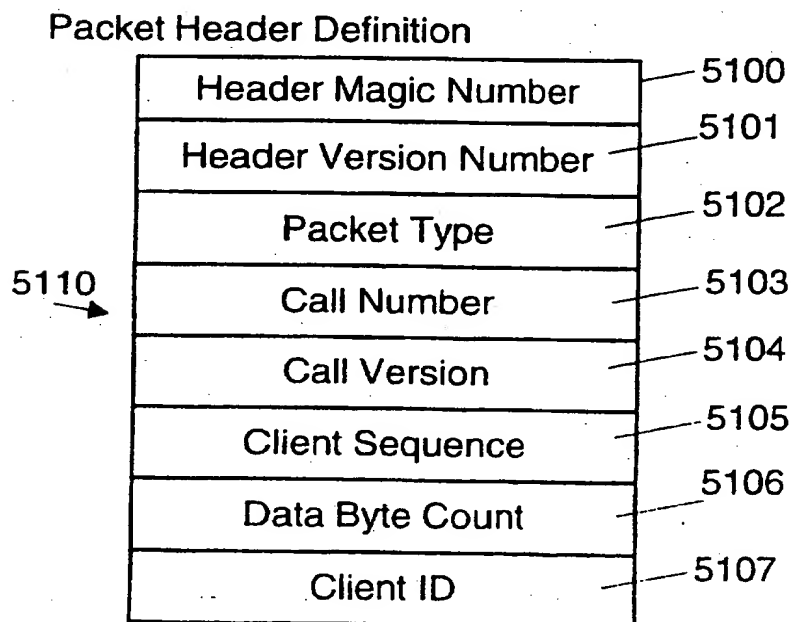


FIG. 11

10/64

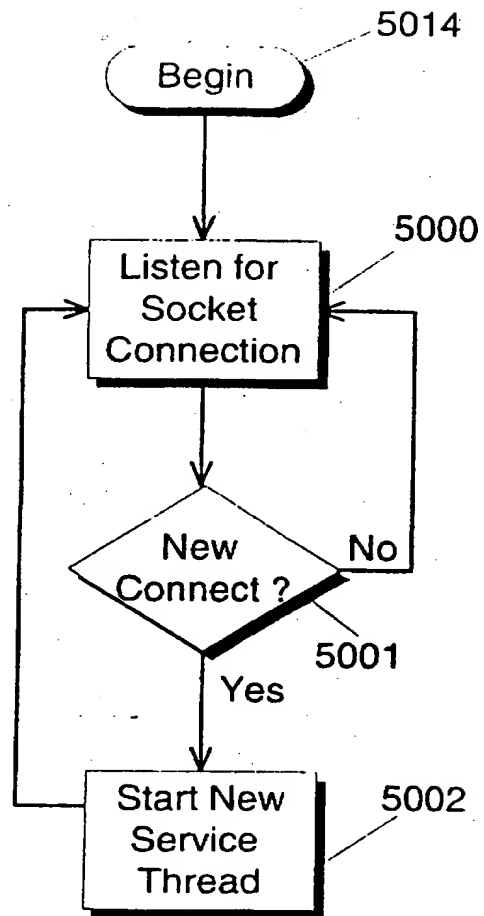


FIG. 12

11/64

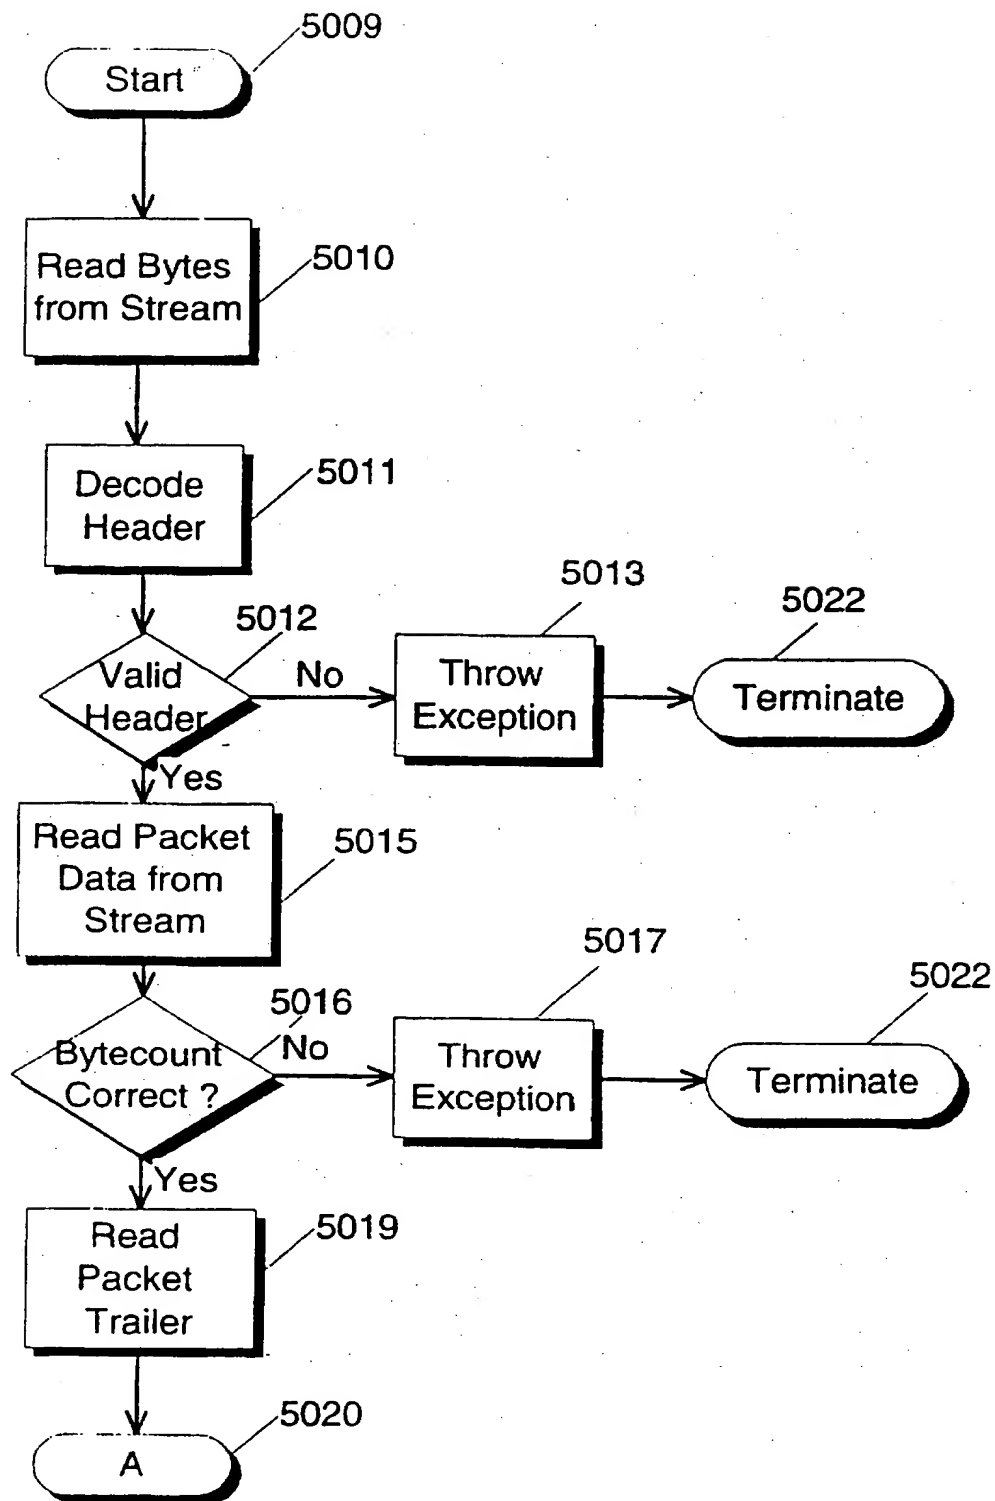


FIG. 13A

12/64

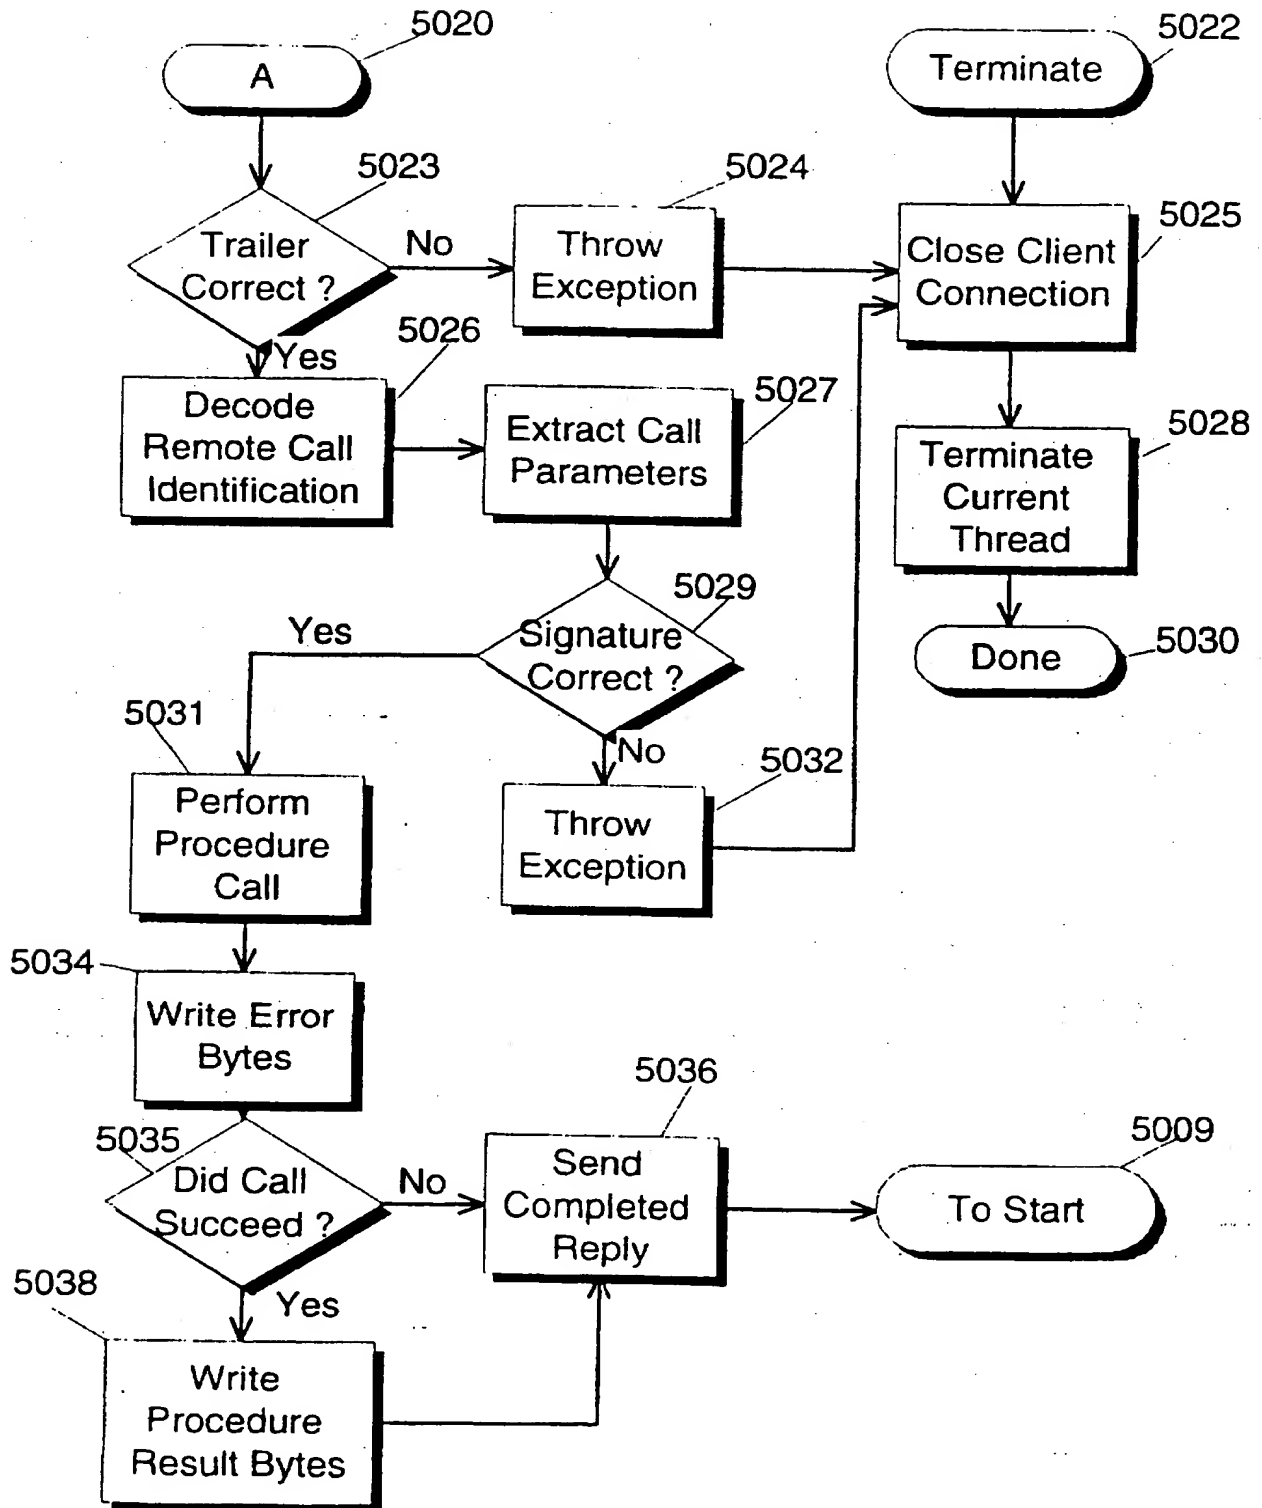


FIG. 13B

13/64

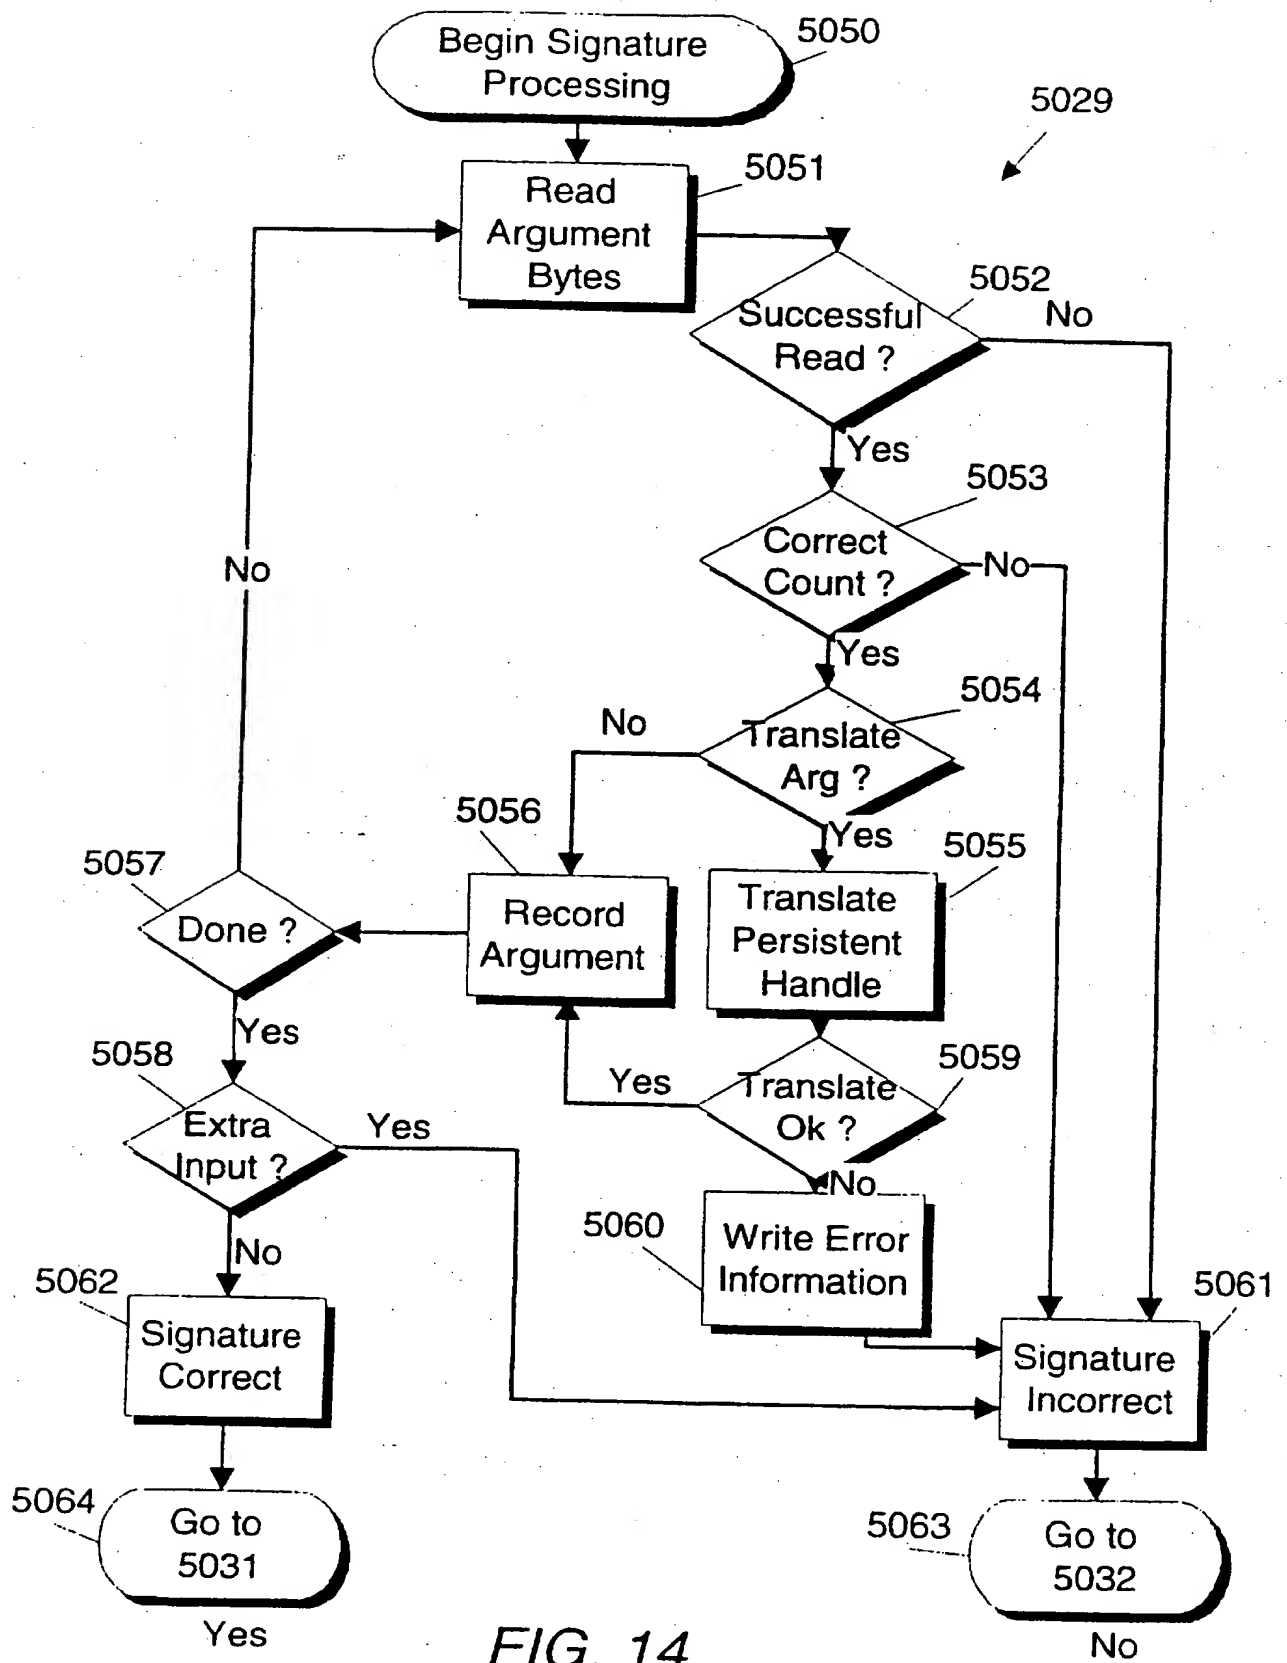


FIG. 14

14/64

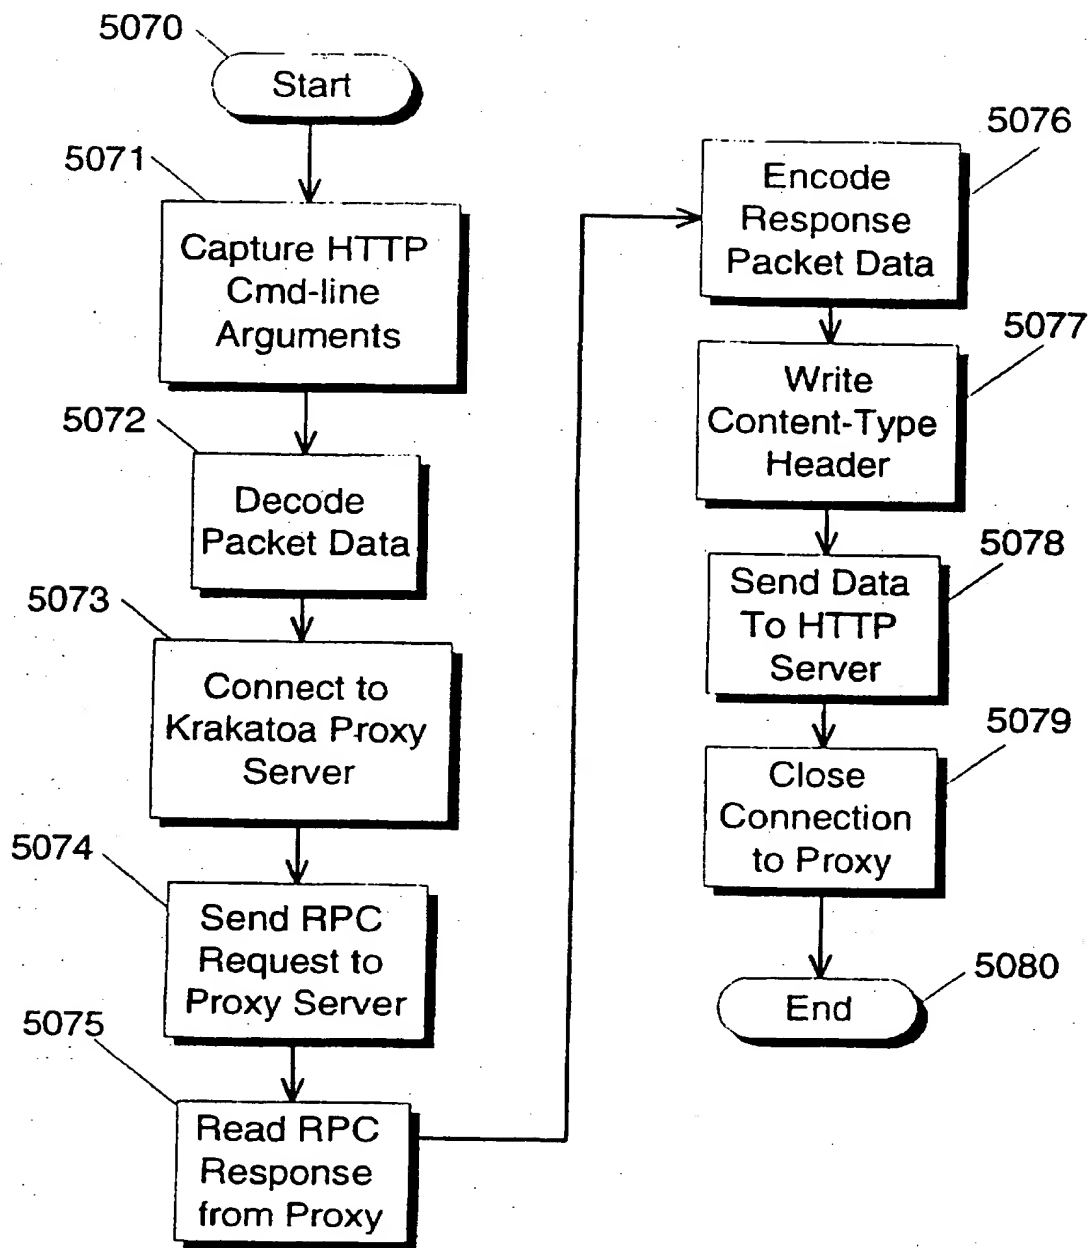


FIG. 15

15/64


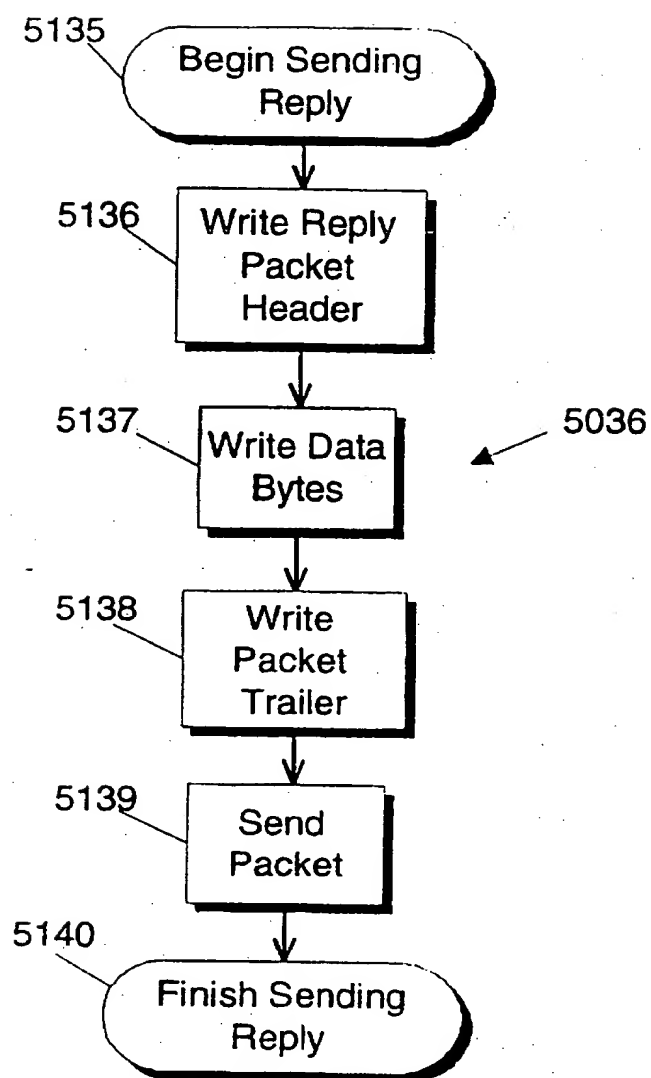


FIG. 16

16/64

**FIG. 17**

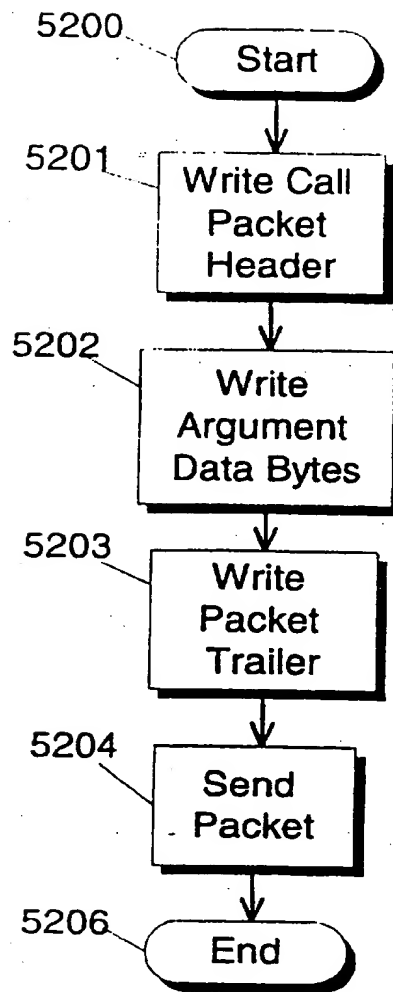

17/64

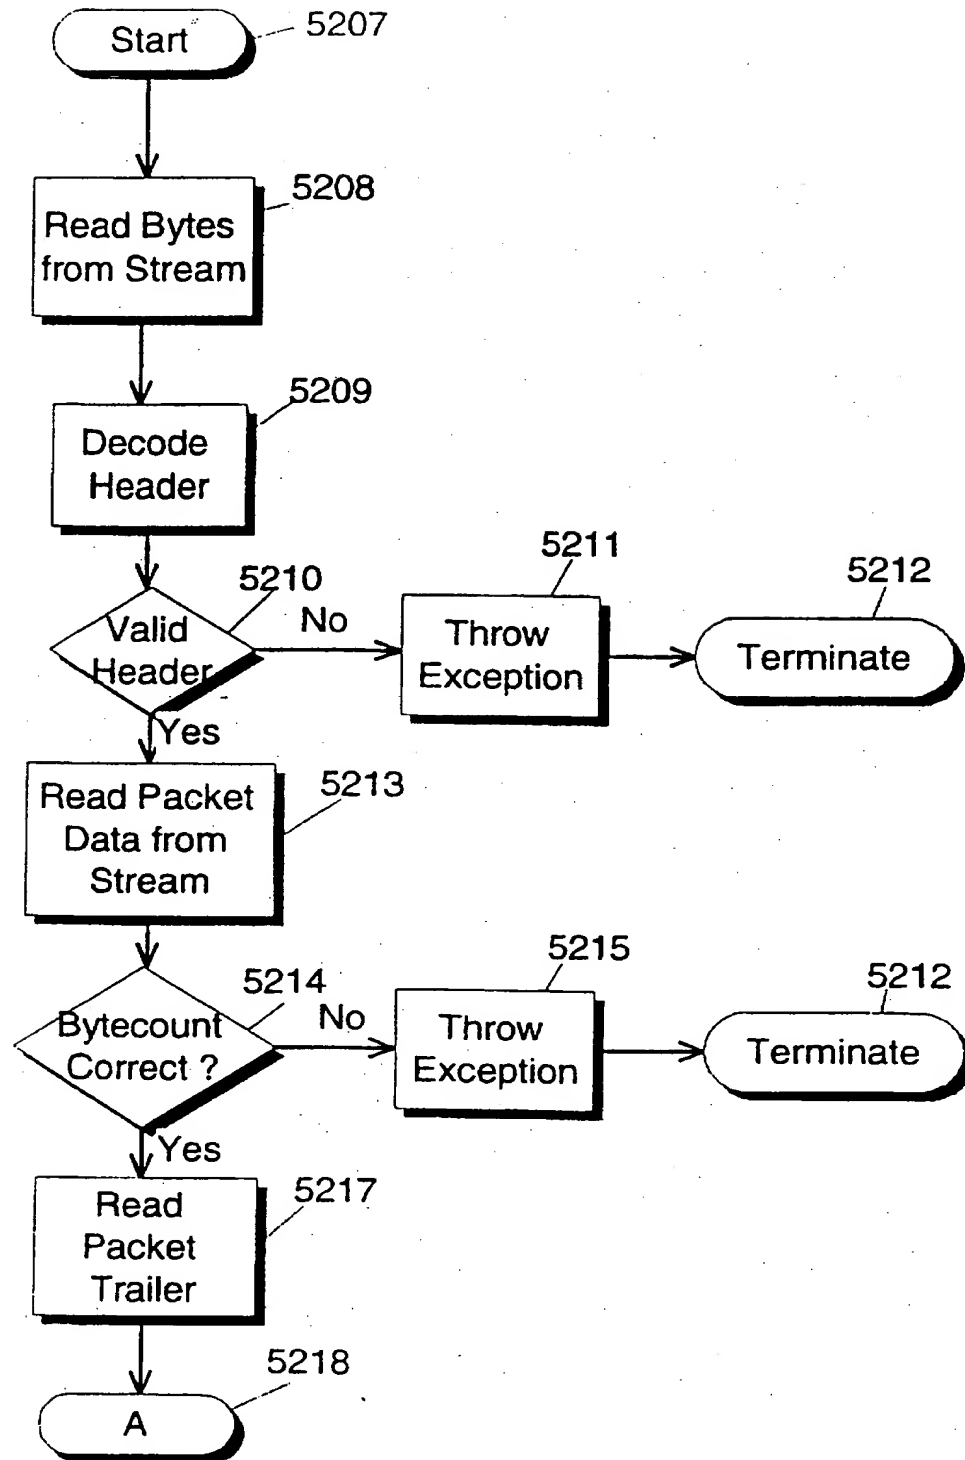


FIG. 18A


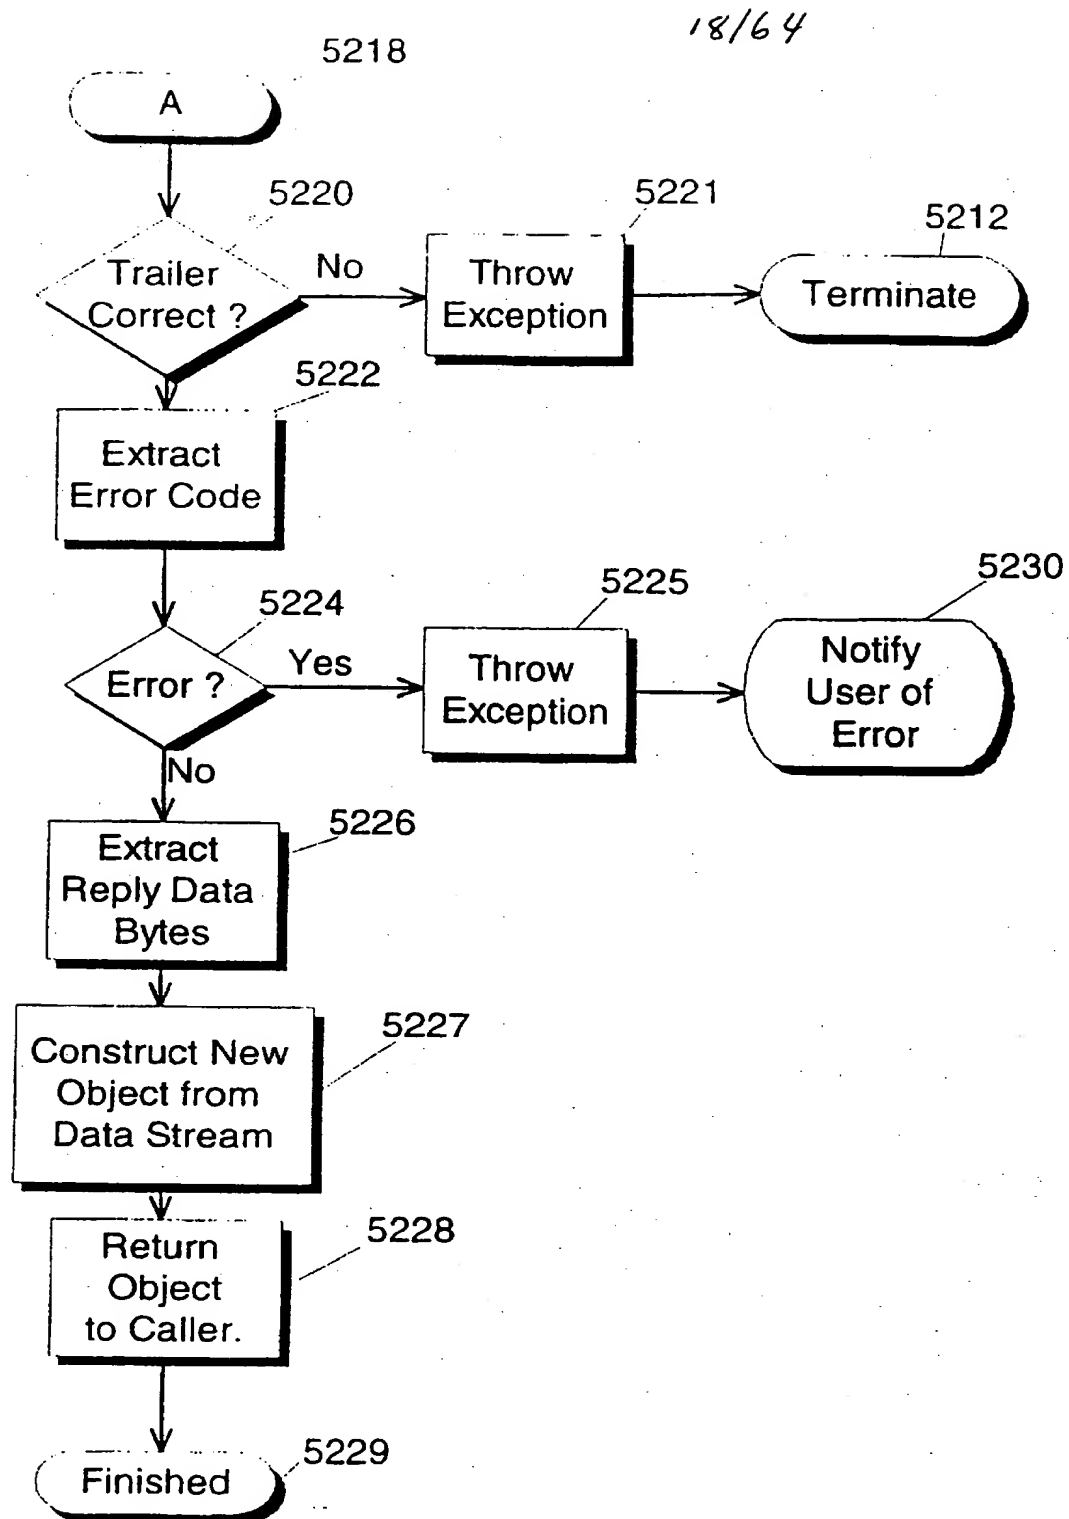


FIG. 18B

19/64

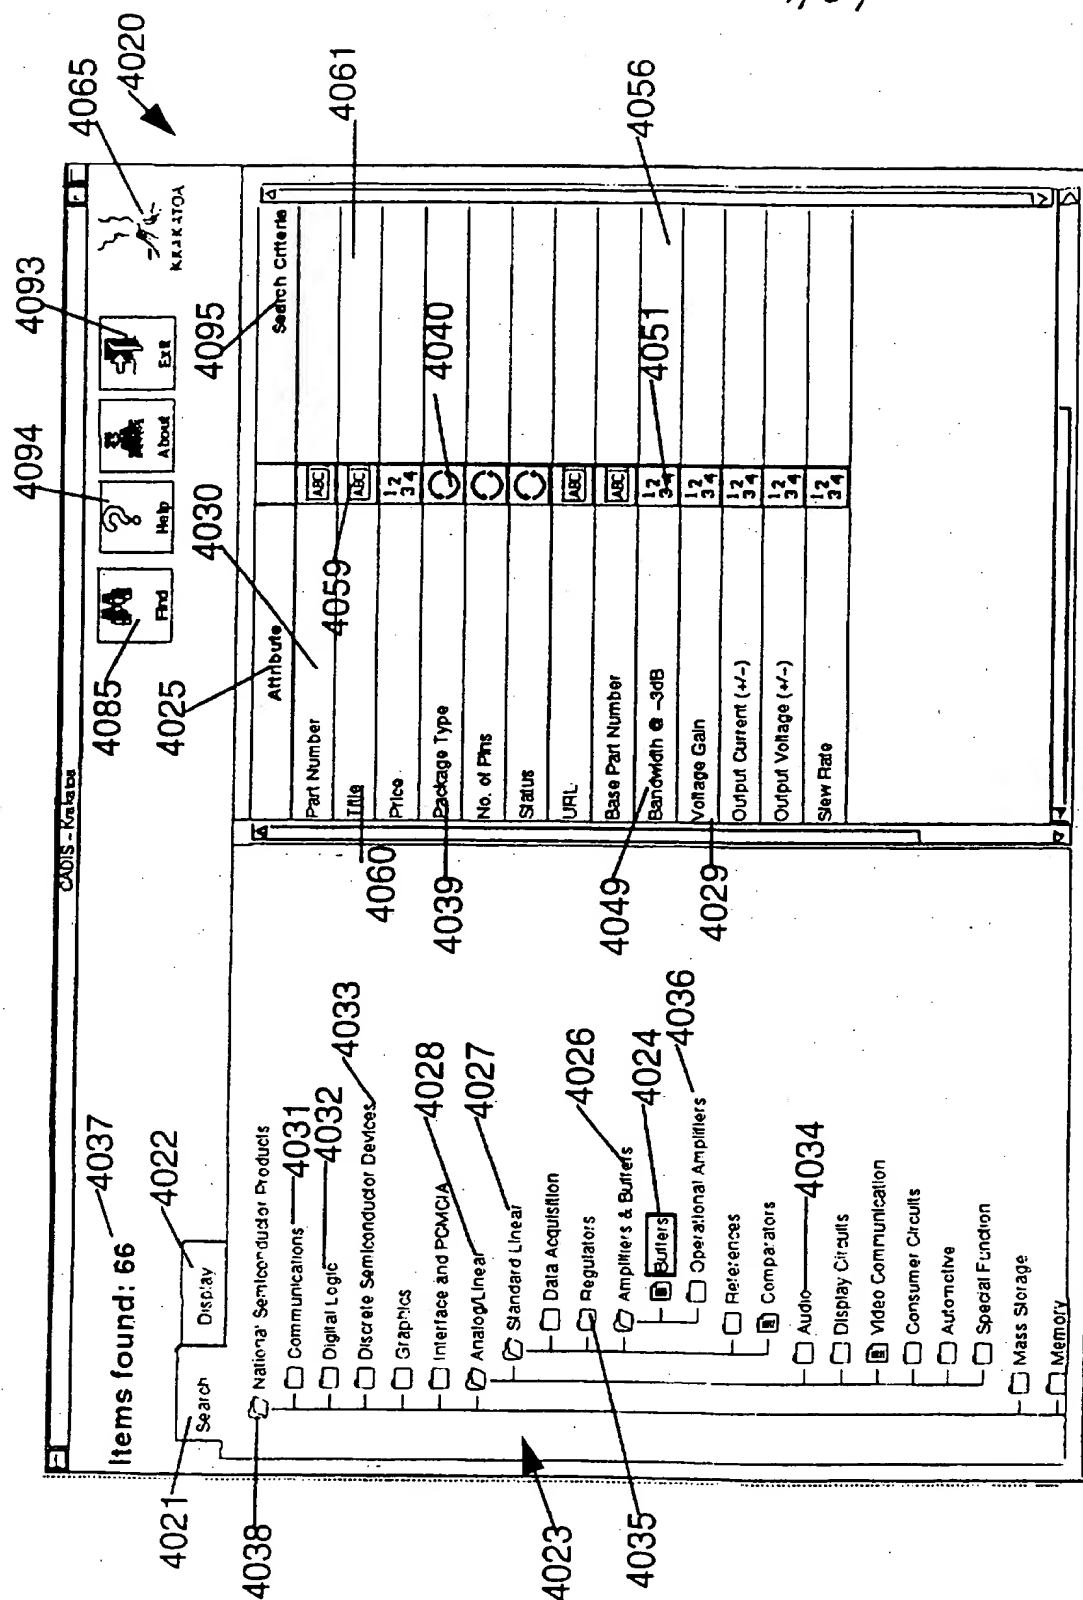

20/64

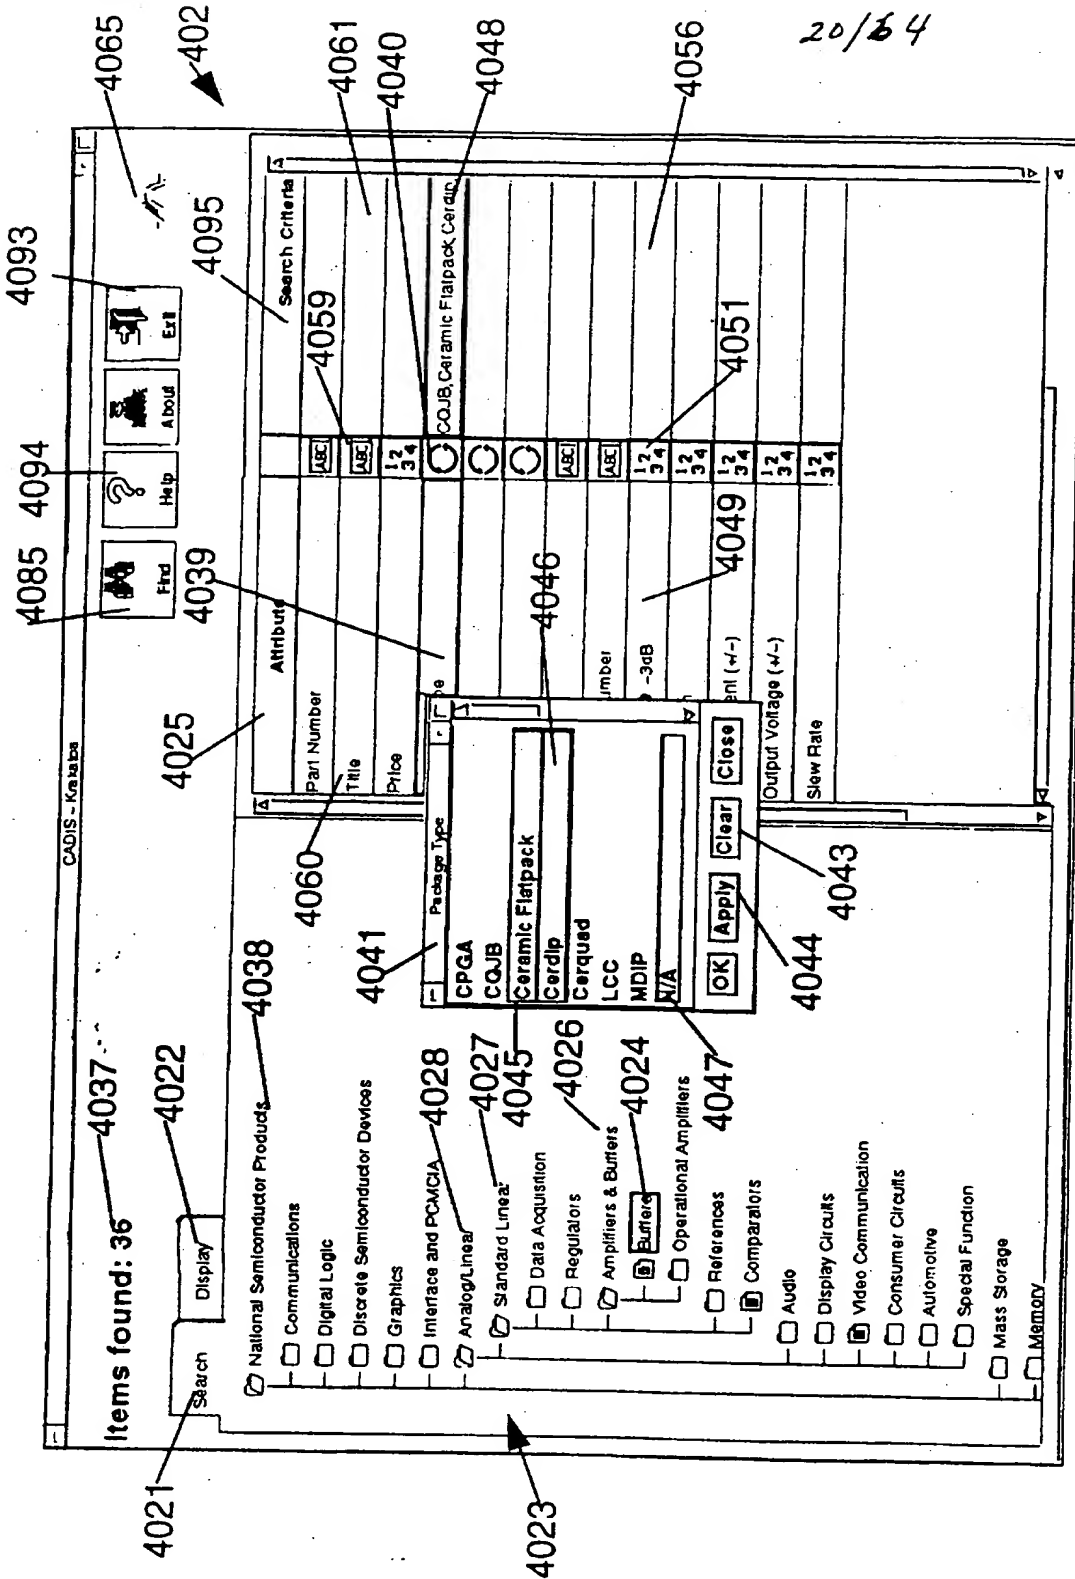


FIG. 20

21/64

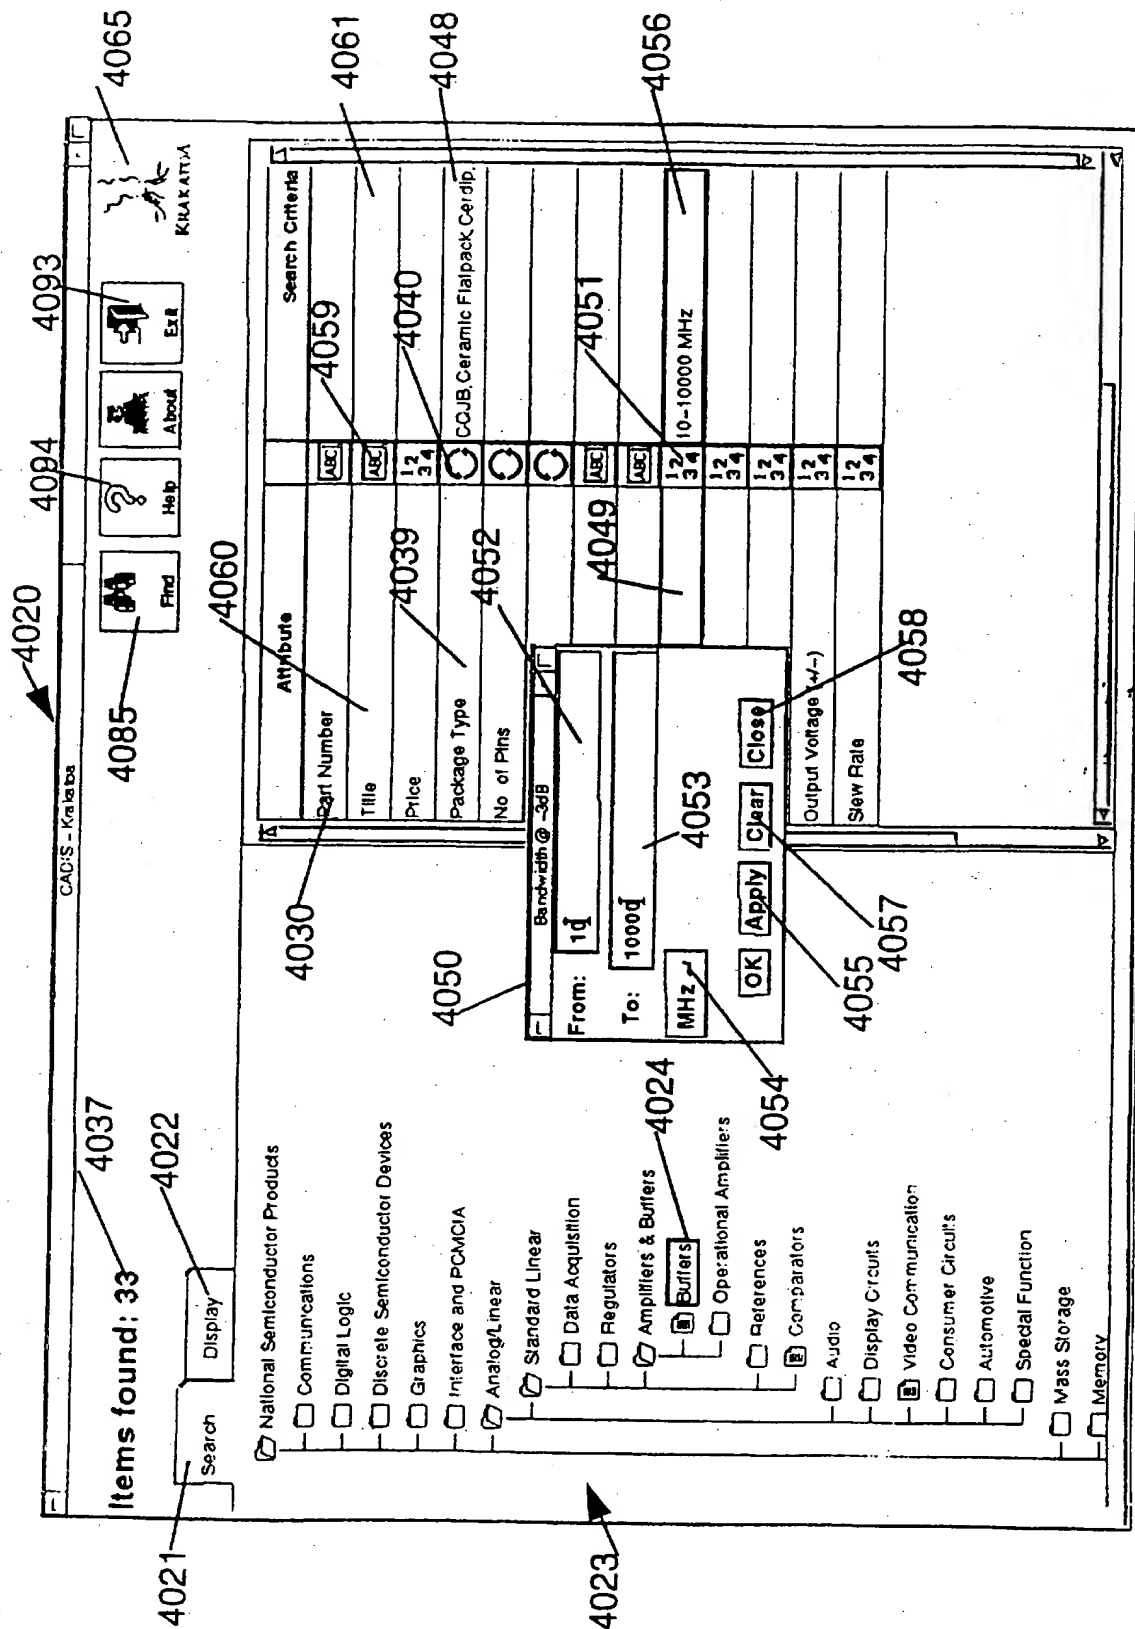


FIG. 21

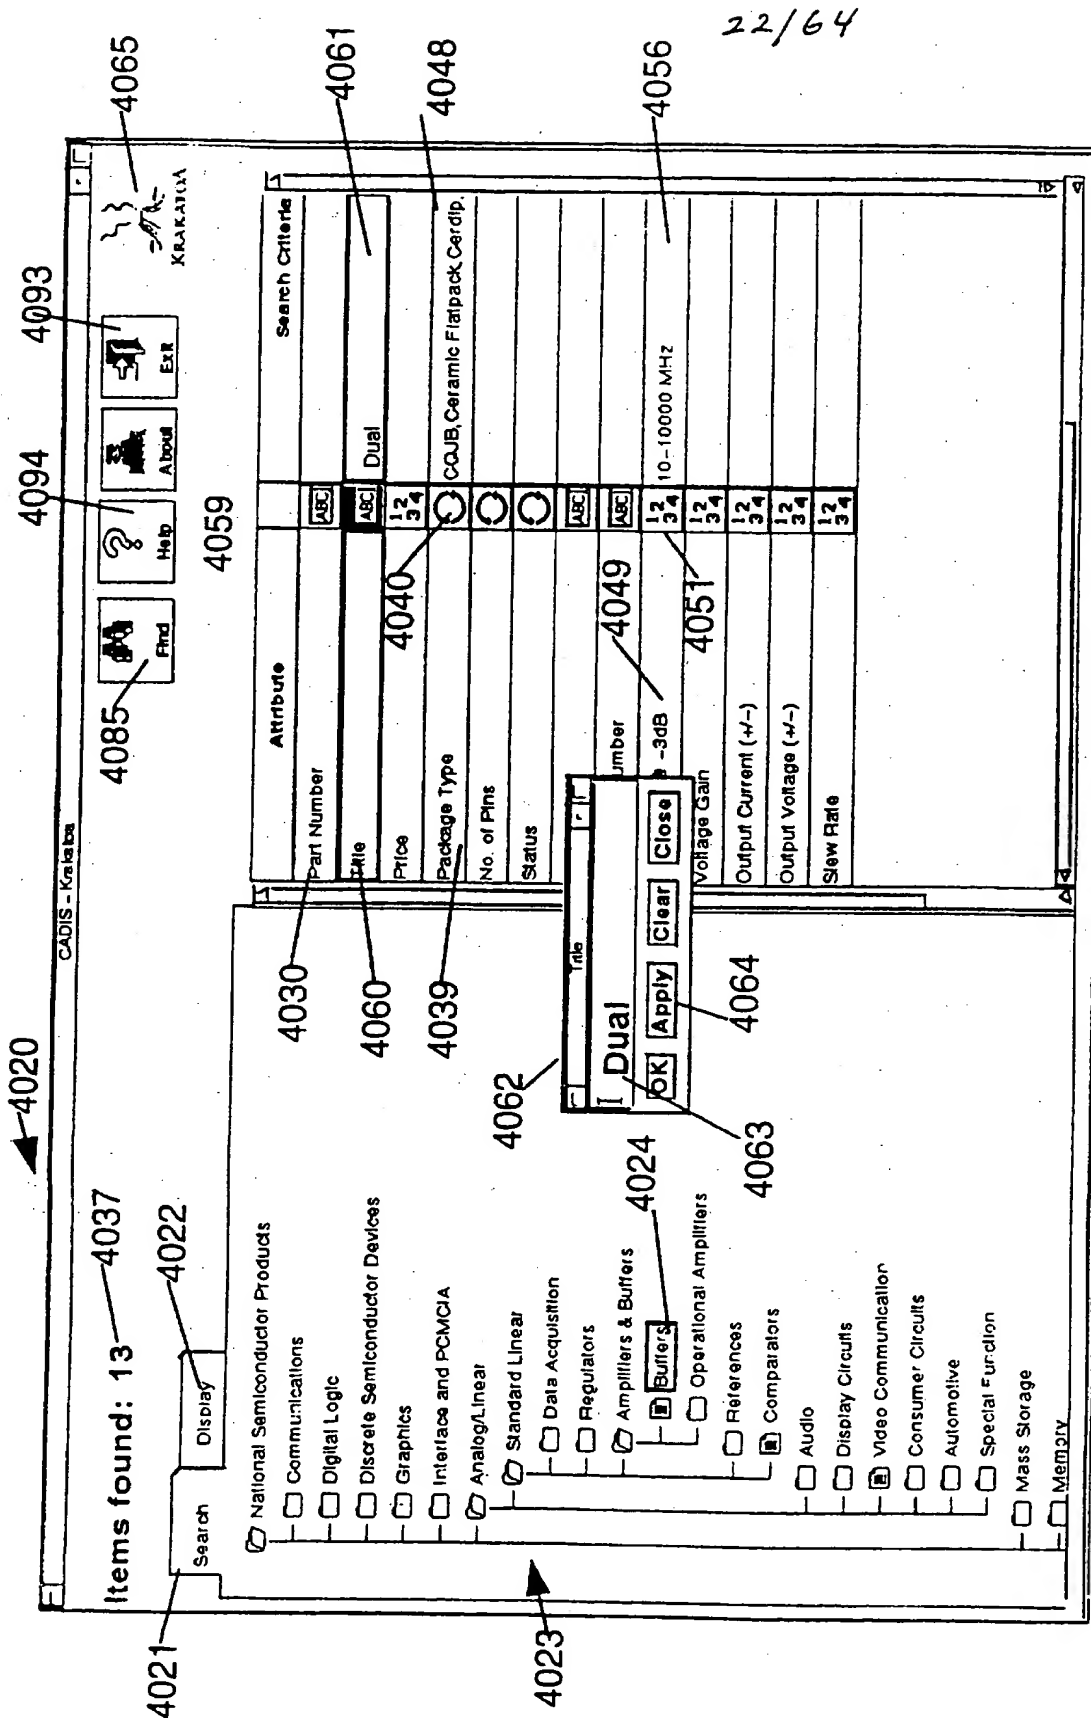


FIG. 22

23/64

CADIS - Krekita

Items found: 13

Search    Display    4021    4022    4068    4069    4073    4075    4094    4070    4065

Sort    Info    Hot Links    Help    About    ExR

Part Number	Title	Price	Package Type
1 LM105F-MLS	Voltage Regulator		Ceramic Flatpack
2 LM110F-MLS	Voltage Follower		Ceramic Flatpack
3 LM124AF-MLS	Low Power Quad Operational Amplifier		Ceramic Flatpack
4 LM108AF-MLS	Operational Amplifiers		Ceramic Flatpack
5 LF158AF-MCP	LF155/LF156/LF157 Series Monolithic JFET Input Operational Amplifier		Ceramic Flatpack
6 LH211F-MIL	Dual Voltage Comparator		Ceramic Flatpack
7 LH211F/883	Dual Voltage Comparator	88	Ceramic Flatpack
8 LM111F-MLS	Voltage Comparator		Ceramic Flatpack
9 LM139AF-MCP	Low Power Low Offset Voltage Quad Comparator		Ceramic Flatpack
10 LM139F-MLS	Low Power Low Offset Voltage Quad Comparator		Ceramic Flatpack
11 LM139AF-MLS	Low Power Low Offset Voltage Quad Comparator		Ceramic Flatpack
12 LM161F/883	High Speed Differential Comparator		Ceramic Flatpack
13 LM161F-MLS	High Speed Differential Comparator		Ceramic Flatpack

FIG. 23

24/64

4076

Item Information

National Semiconductor Products

4084

Analog/Linear

Standard Linear

Comparators

4077

Attribute Name	Attribute Title
Part Number	LM161F/883
Title	High Speed Differential Comparator
Price	\$ .62
Package Type	Ceramic Flatpack
No. of Pins	14
Status	Full production
URL	<a href="http://www.national.com/pdf/LMLM161.html">http://www.national.com/pdf/LMLM161.html</a>

4081

4080

4082

4079


4083

OK


FIG. 24



25/64

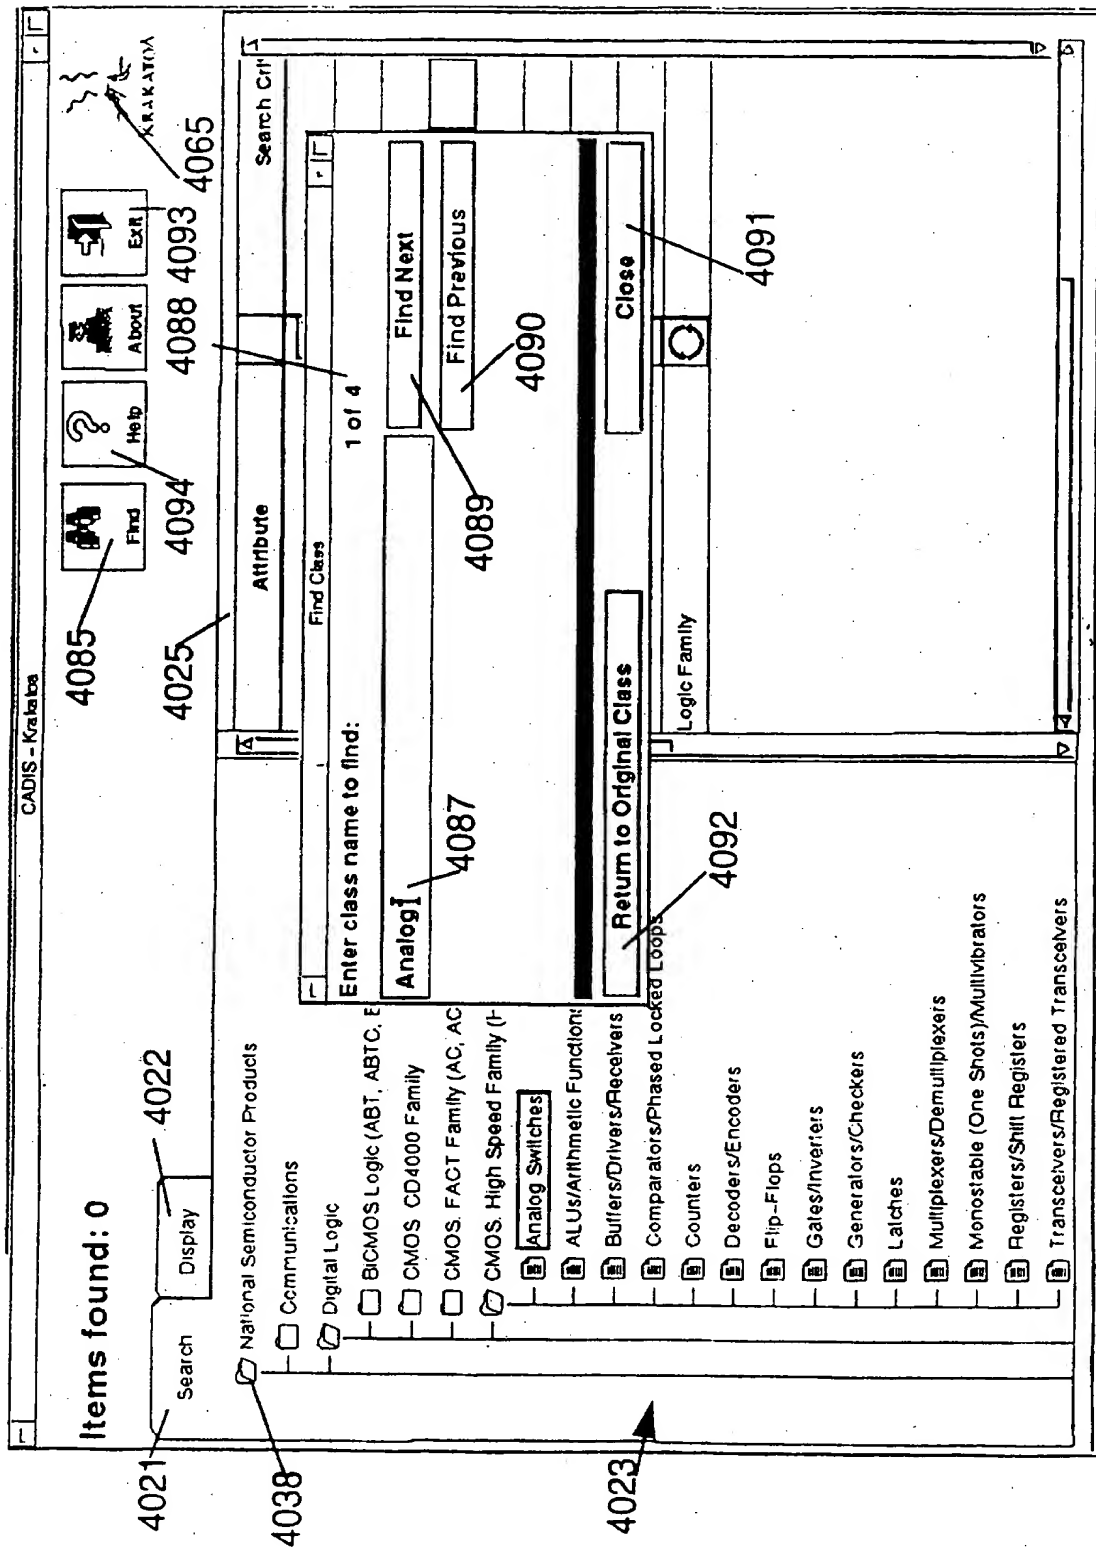

26/64

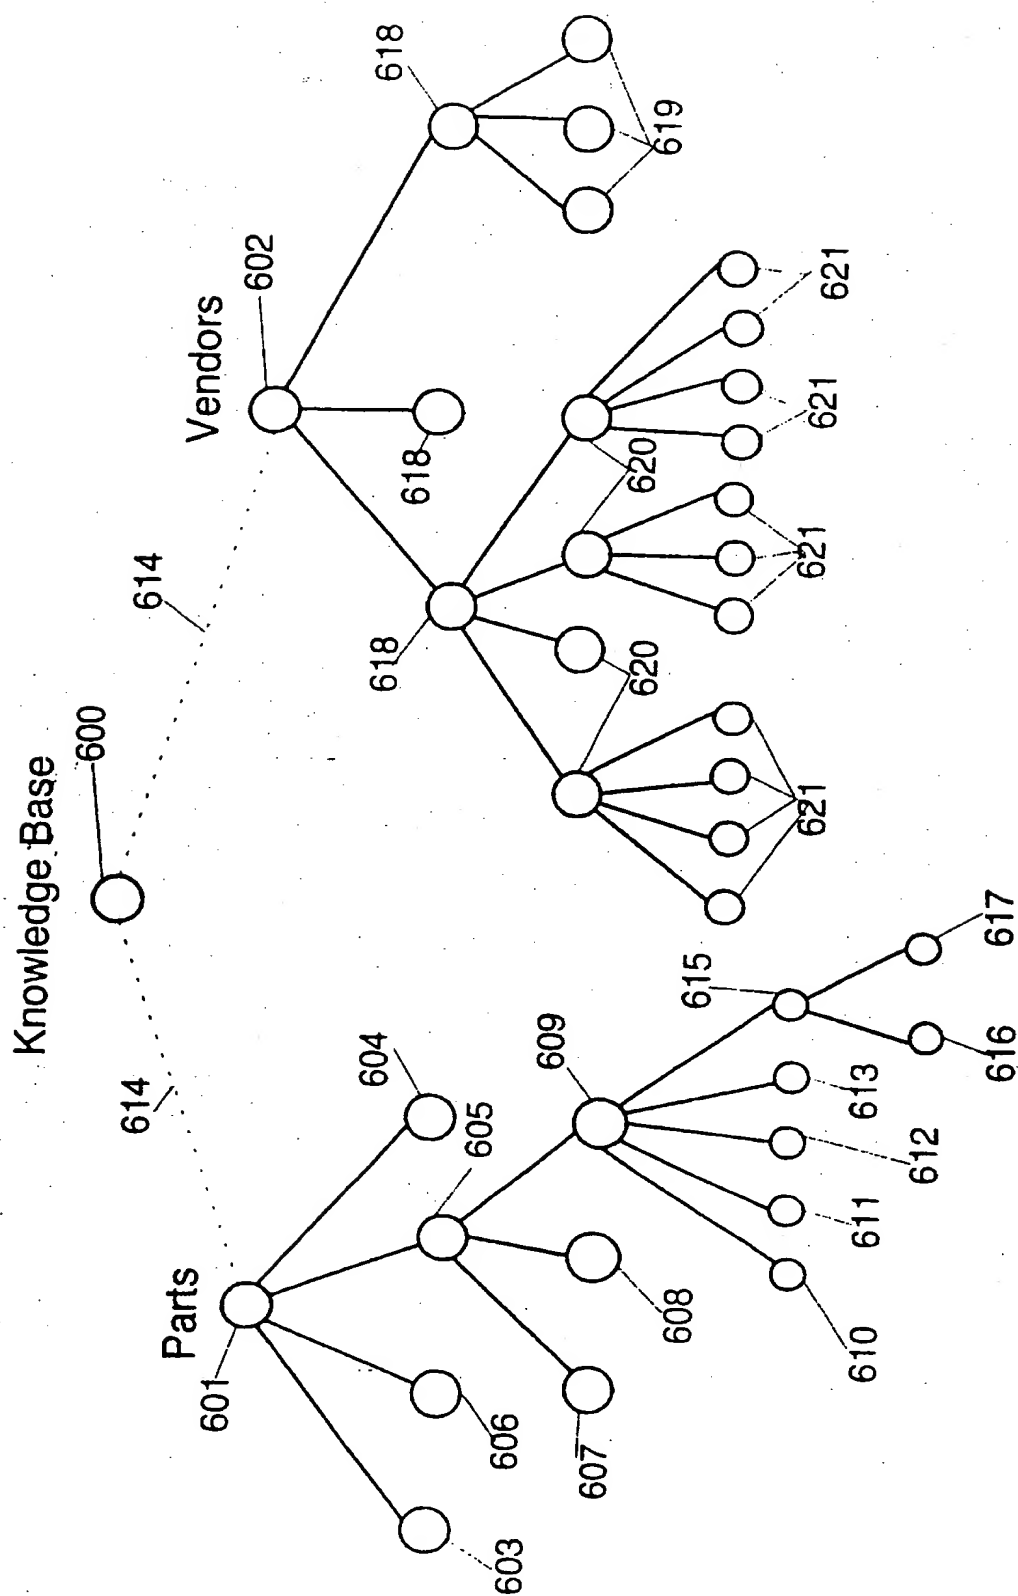

27/64

626	Vendor Code
624	Vendor Part No.
627	Vendor Contact
628	Address
629	Vendor Name
630	Sales Office Locations
631	Dealers Who Carry This Vendor's Merchandise
	...

FIG. 26C

622	Internal Part No.
623	Vendor ID
624	Vendor Part No.
625	Title
626	...

FIG. 26B

28/64

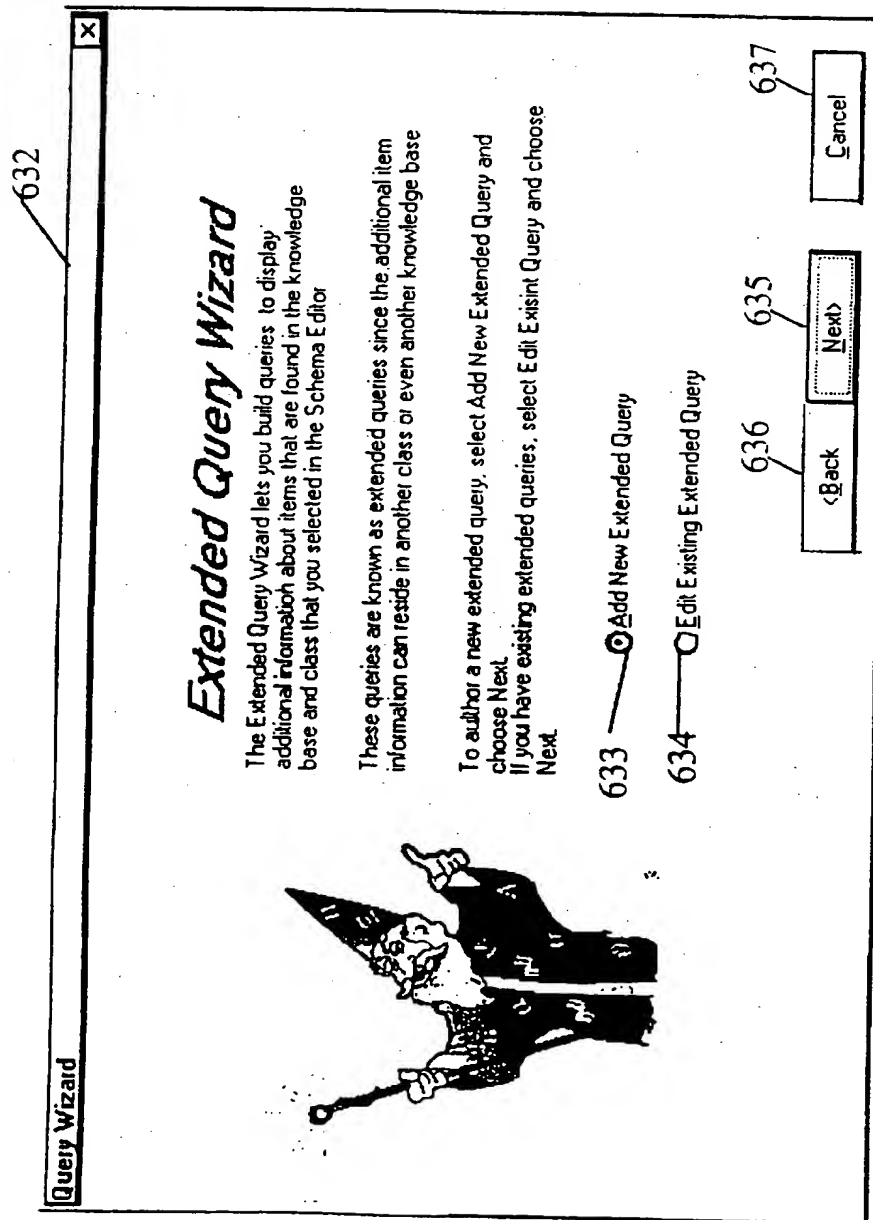


FIG. 27

29/64

638

Query Wizard

The Extended Query is available when you View Search Results. The Label is displayed as a menu option or button. The Description is whatever you want to say.

Extended Query Label 639

Extended Query Description 640

636 635 637

<Back Next> Cancel

FIG. 28

30/64

Query Wizard

639

640

Description

642 Select the class for running the query

643 Use the owning class of the instance when running the query

636 < Back

635 Next >

637 Cancel

FIG. 29

31/64

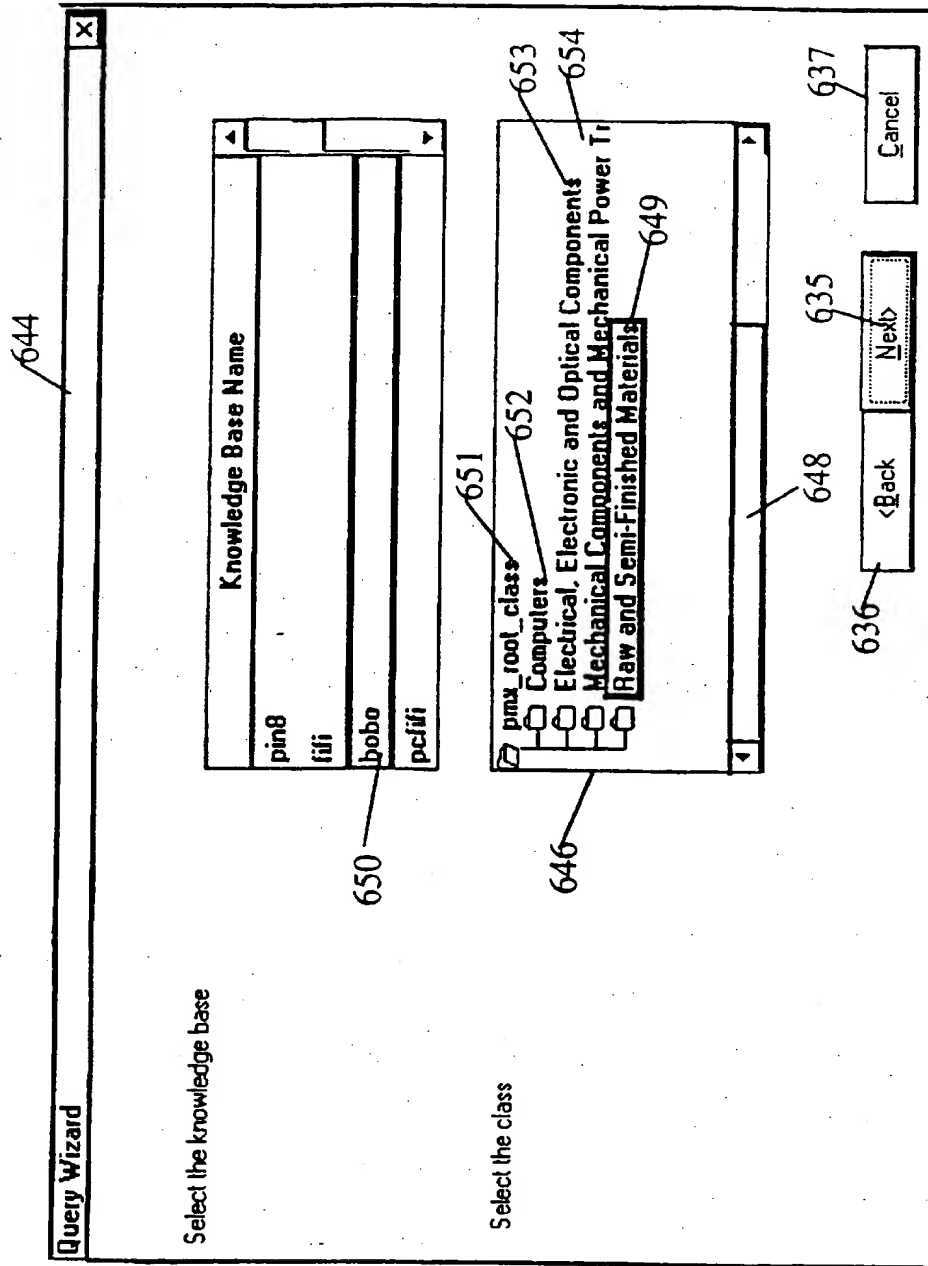


FIG. 30

32/64

650

639 Label18

656 Attribute

657 Part Number

658 Description

660 Operator

662 Attribute

663 Part Number

664 Description

664 Add New Selector

666 Remove Selected Selector

665 < Back

667 Finish

637 Cancel

FIG. 31



33/64

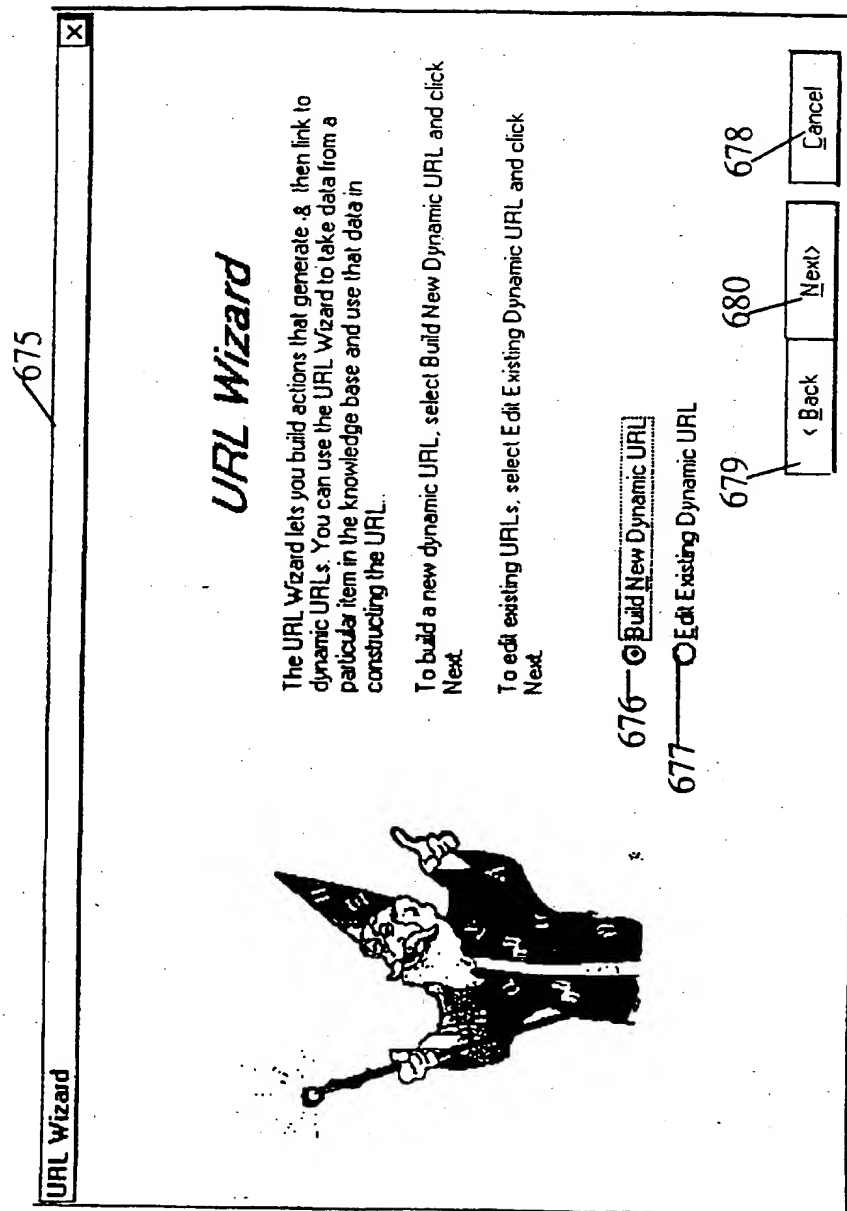


FIG. 32

34/64

FIG. 33

35/64

URL Wizard

URL Prefix:  688

Substitutable URL Parameters: 691

Parameter	name	value
<input checked="" type="checkbox"/> Knowledge Base Name 689		DBNAME
<input type="checkbox"/> Instance Handle 692		IHANDLE
<input type="checkbox"/> User Login Name 694		LOGIN
<input type="checkbox"/> Part Number 693		Part Number

URL Prefix Template:  690

< Back 679    Next 680    Cancel 678

FIG. 34

36/64

695

696

URL Prefix Template  
http://

Substitutable URL Parameters:

Parameter	name	value
<input type="checkbox"/> Knowledge Base Name	KBname	DBNAME
<input type="checkbox"/> Instance Handle	INST	_IHANDLE_
<input type="checkbox"/> User Login Name	LOGIN	_LOGIN_
<input type="checkbox"/> Part Number	Part Number	_Part Number_

697

679

698

678

< Back Finish Cancel

FIG. 35

37/64

735

737

736

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

1001

1002

1003

1004

1005

1006

1007

1008

1009

1010

1011

1012

1013

1014

1015

1016

1017

1018

1019

1020

1021

1022

1023

1024

1025

1026

1027

1028

1029

1030

1031

1032

1033

1034

1035

1036

1037

1038

1039

1040

1041

1042

1043

1044

1045

1046

1047

1048

1049

1050

1051

1052

1053

1054

1055

1056

1057

1058

1059

1060

1061

1062

1063

1064

1065

1066

1067

1068

1069

1070

1071

1072

1073

1074

1075

1076

1077

1078

1079

1080

1081

1082

1083

1084

1085

1086

1087

1088

1089

1090

1091

1092

1093

1094

1095

1096

1097

1098

1099

1100

1101

1102

1103

1104

1105

1106

1107

1108

1109

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1120

1121

1122

1123

1124

1125

1126

1127

1128

1129

1130

1131

1132

1133

1134

1135

1136

1137

1138

1139

1140

1141

1142

1143

1144

1145

1146

1147

1148

1149

1150

1151

1152

1153

1154

1155

1156

1157

1158

1159

1160

1161

1162

1163

1164

1165

1166

1167

1168

1169

1170

1171

1172

1173

1174

1175

1176

1177

1178

1179

1180

1181

1182

1183

1184

1185

1186

1187

1188

1189

1190

1191

1192

1193

1194

1195

1196

1197

1198

1199

1200

1201

1202

1203

1204

1205

1206

1207

1208

1209

1210

1211

1212

1213

1214

1215

1216

1217

1218

1219

1220

1221

1222

1223

1224

1225

1226

1227

1228

1229

1230

1231

1232

1233

1234

1235

1236

1237

1238

1239

1240

1241

1242

1243

1244

1245

1246

1247

1248

1249

1250

1251

1252

1253

1254

1255

1256

1257

1258

1259

1260

1261

1262

1263

1264

1265

1266

1267

1268

1269

1270

1271

1272

1273

1274

1275

1276

1277

1278

1279

1280

1281

1282

1283

1284

1285

1286

1287

1288

1289

1290

1291

1292

1293

1294

1295

1296

1297

1298

1299

1300

1301

1302

1303

1304

1305

1306

1307

1308

1309

1310

1311

1312

1313

1314

1315

1316

1317

1318

1319

1320

1321

1322

1323

1324

1325

1326

1327

1328

1329

1330

1331

1332

1333

1334

1335

1336

1337

1338

1339

1340

1341

1342

1343

1344

1345

1346

1347

1348

1349

1350

1351

1352

1353

1354

1355

1356

1357

1358

1359

1360

1361

1362

1363

1364

1365

1366

1367

1368

1369

1370

1371

1372

1373

1374

1375

1376

1377

1378

1379

1380

1381

1382

1383

1384

1385

1386

1387

1388

1389

1390

1391

1392

1393

1394

1395

1396

1397

1398

1399

1400

1401

1402

1403

1404

1405

1406

1407

1408

1409

1410

1411

1412

1413

1414

1415

1416

1417

1418

1419

1420

1421

1422

1423

1424

1425

1426

1427

1428

1429

1430

1431

1432

1433

1434

1435

1436

1437

1438

1439

1440

1441

1442

1443

1444

1445

1446

1447

1448

1449

1450

1451

1452

1453

1454

1455

1456

1457

1458

1459

1460

1461

1462

1463

1464

1465

1466

1467

1468

1469

1470

1471

1472

1473

1474

1475

1476

1477

1478

1479

1480

1481

1482

1483

1484

1485

1486

1487

1488

1489

1490

1491

1492

1493

1494

1495

1496

1497

1498

1499

1500

1501

1502

1503

1504

1505

1506

1507

1508

1509

1510

1511

1512

1513

1514

1515

1516

1517

1518

1519

1520

1521

1522

1523

1524

1525

1526

1527

1528

1529

1530

1531

1532

1533

1534

1535

1536

1537

1538

1539

1540

1541

1542

1543

1544

1545

1546

1547

1548

1549

1550

1551

1552

1553

1554

1555

1556

1557

1558

1559

1560

1561

1562

1563

1564

1565

1566

1567

1568

1569

1570

1571

1572

1573

1574

1575

1576

1577

1578

1579

1580

1581

1582

1583

1584

1585

1586

1587

1588

1589

1590

1591

1592

1593

1594

1595

1596

1597

1598

1599

1600

1601

1602

1603

1604

1605

1606

1607

1608

1609

1610

1611

1612

1613

1614

1615

1616

1617

1618

1619

1620

1621

1622

1623

1624

1625

1626

1627

1628

1629

1630

1631

1632

1633

1634

1635

1636

1637

1638

1639

1640

1641

1642

1643

1644

1645

1646

1647

1648

1649

1650

1651

1652

1653

1654

1655

1656

1657

1658

1659

1660

1661

1662

1663

1664

1665

1666

1667

1668

1669

1670

1671

1672

1673

1674

1675

1676

1677

1678

1679

1680

1681

1682

1683

1684

1685

1686

1687

1688

1689

1690

1691

1692

1693

1694

1695

1696

1697

1698

1699

1700

1701

1702

1703

1704

1705

1706

1707

1708

1709

1710

1711

1712

1713

1714

1715

1716

1717

1718

1719

1720

1721

1722

1723

1724

1725

1726

1727

1728

1729

1730

1731

1732

1733

1734

1735

1736

1737

1738

1739

1740

1741

1742

1743

1744

1745

1746

1747

1748

1749

1750

1751

1752

1753

1754

1755

1756

1757

1758

1759

1760

1761

1762

1763

1764

1765

1766

1767

1768

1769

1770

1771

1772

1773

1774

1775

1776

1777

1778

1779

1780

1781

1782

1783

1784

1785

1786

1787

1788

1789

1790

1791

1792

1793

1794

1795

1796

1797

1798

1799

1800

1801

1802

1803

1804

1805

1806

1807

1808

1809

1810

1811

1812

1813

1814

1815

1816

1817

1818

1819

1820

1821

1822

1823

1824

1825

1826

1827

1828

1829

1830

1831

1832

1833

1834

1835

1836

1837

1838

1839

1840

1841

1842

1843

1844

1845

1846

1847

1848

1849

1850

1851

1852

1853

1854

1855

1856

1857

1858

1859

1860

1861

1862

1863

1864

1865

1866

1867

1868

1869

1870

1871

1872

1873

1874

1875

1876

1877

1878

1879

1880

1881

1882

1883

1884

1885

1886

1887

1888

1889

1890

1891

1892

1893

1894

1895

1896

1897

1898

1899

1900

1901

1902

1903

1904

1905

1906

1907

1908

1909

1910

1911

1912

1913

1914

1915

1916

1917

1918

1919

1920

1921

1922

1923

1924

1925

1926

1927

1928

1929

1930

1931

1932

1933

1934

1935

1936

1937

1938

1939

1940

1941

1942

1943

1944

1945

1946

1947

1948

1949

1950

1951

1952

1953

1954

1955

1956

1957

1958

1959

1960

1961

1962

1963

1964

1965

1966

1967

1968

1969

1970

1971

1972

1973

1974

1975

1976


1977

1978

1979

1980

38/64

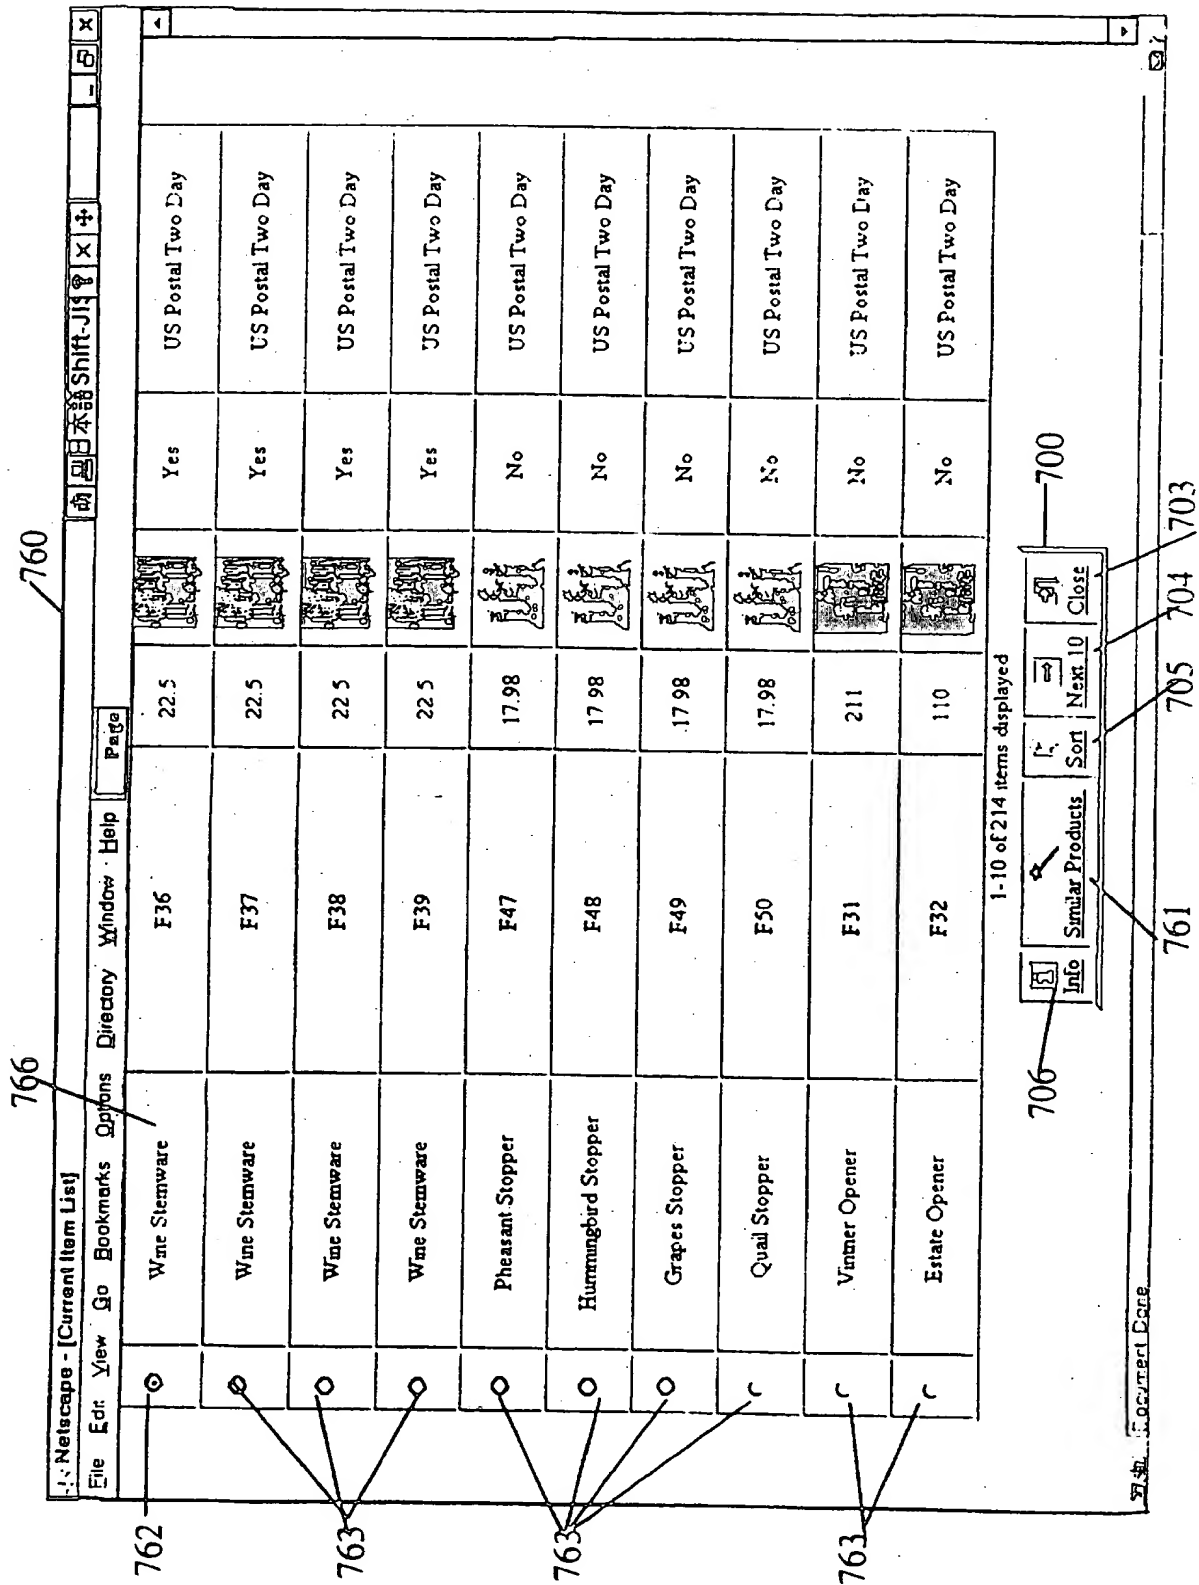


39164

764

764





765

Product Description	Catalogue Identification	Price (\$)	Picture	Sale Item	Shipping Options	Volume (oz.) (#)	Set Size (#)	Manufacturer	Shape	Series
Wine Stemware	F36	22.5		Yes	US Postal Two Day	12	4	Schott Zwiesel	Wine	Brilliance

766

767

768

Product Description	Catalogue Identification	Price \$	Picture	Sale Item	Shipping Options
Wine Stemware	F36	22.5		Yes	US Postal Two Day
Wine Stemware	F37	22.5		Yes	US Postal Two Day
Wine Stemware	F38	22.5		Yes	US Postal Two Day
Wine Stemware	F39	22.5		Yes	US Postal Two Day

1-4 of 4 items displayed

700

703

706

767

FIG. 38





Document Done

40/64

771

Netscape - [Current Item List]

File Edit View Go Bookmarks Options Directory Window Help Page

	Girls 24" 15-speed Catalina	system, 96 quality Shimano components, aggressive mountain bike tires.	13	329	Pacific	321654
	Boys 20" Freestyle/BMX Team Pro	ACS brake rotor, chrom-plated freestyle fram, alloy rims.	10	295	Royce Union	654987
	Boys 24" Kodiak	18-speed Grip Shift, Shimano alloy cantilever brakes and levers, alloy rims.	11	195	Pacific	654987
	Mighty Morphin Power Rangers Space Shooters	The lightning-fast target shooting game. Shoots 10 foam disks up to 20 feet.	5	15.56	Milton Bradley	987873

11-20 of 106 items displayed

778 779 779 779 700

Info Store Spotter What's In Store Mind Meld A Star is Born Order Sort Last 10 Next 10 Close


Document Done


706 774 775 776 777 773 703 772 704

FIG. 39



41/64

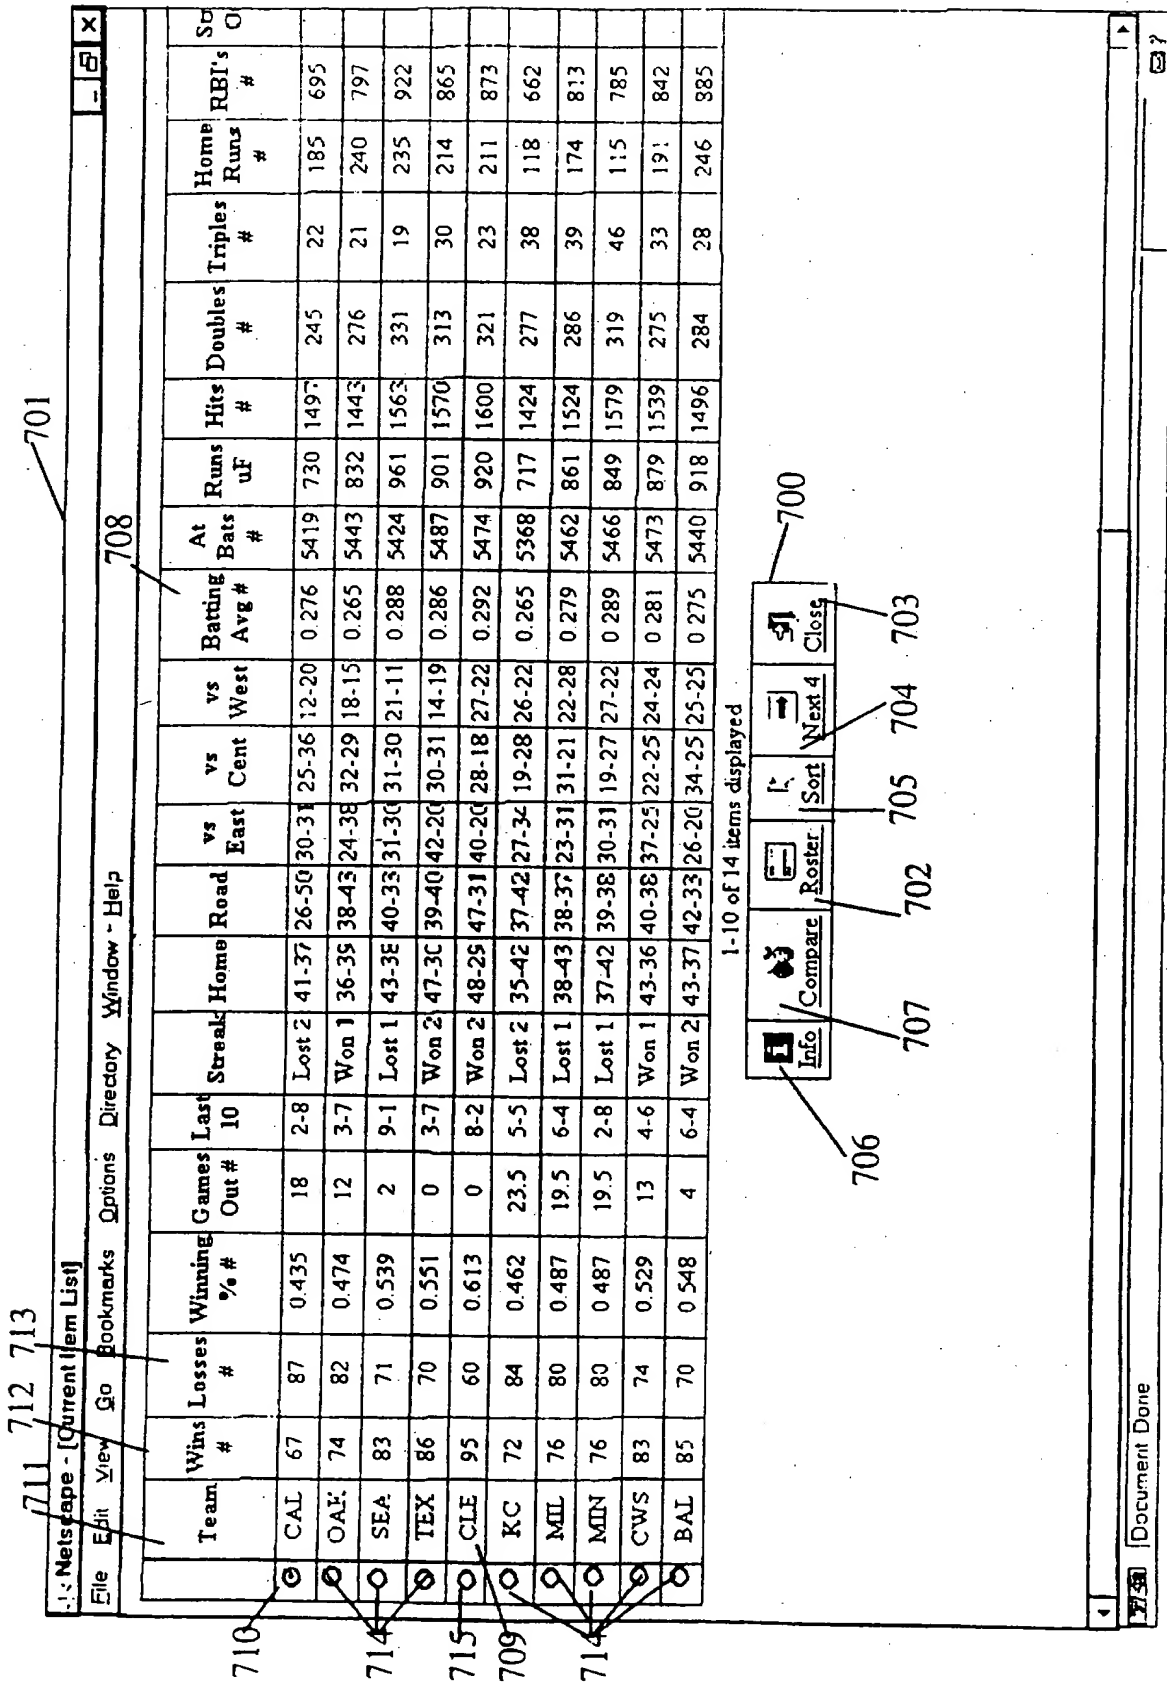




**Netscape - [Player Biography Randy Velarde]**

File Edit View Go Bookmarks Options Directory Window Help

---

<b>THE OFFICIAL SITE OF MAJOR LEAGUE BASEBALL</b>			
Mlb SCORECARD	Mlb DIGEST	Mlb SOURCE	Mlb CLUBS
SPECIAL SECTIONS	Mlb LIBRARY	Mlb CLUBHOUSE SHOP	




Friday, October 18, 1996


---

## Randy Velarde

**BIOGRAPHY**



Position: IF  
Number: #  
Bats: R  
Throws: R  
Height: 6-0 Weight: 192  
Birthdate: November 24, 1962  
Major League Service: 6 years,  
146 days



**1995 SEASON**  
Turned in one of his best seasons, hitting .278 with 7 HR and 46 RBI in 111 games for the Yankees...made 104 starts at 4 different positions (2B, 3B, SS, LF)...was one of the club's leaders down the stretch as the Yankees battled for the wild card playoff spot...started 34 of their last 35 games and hit .293 in that span.

**CAREER HIGHLIGHTS**  
Randy Lee Velarde was selected by the White Sox in the 19th round of the June 1986 free-agent draft...was traded to the Yankees on 1/5/87 with Pete Filson for Scott Nielsen and Mike Soper...prior to 1996 spent his entire 9-season career with the Yankees...became a free agent following the 1995 campaign

FIG. 42

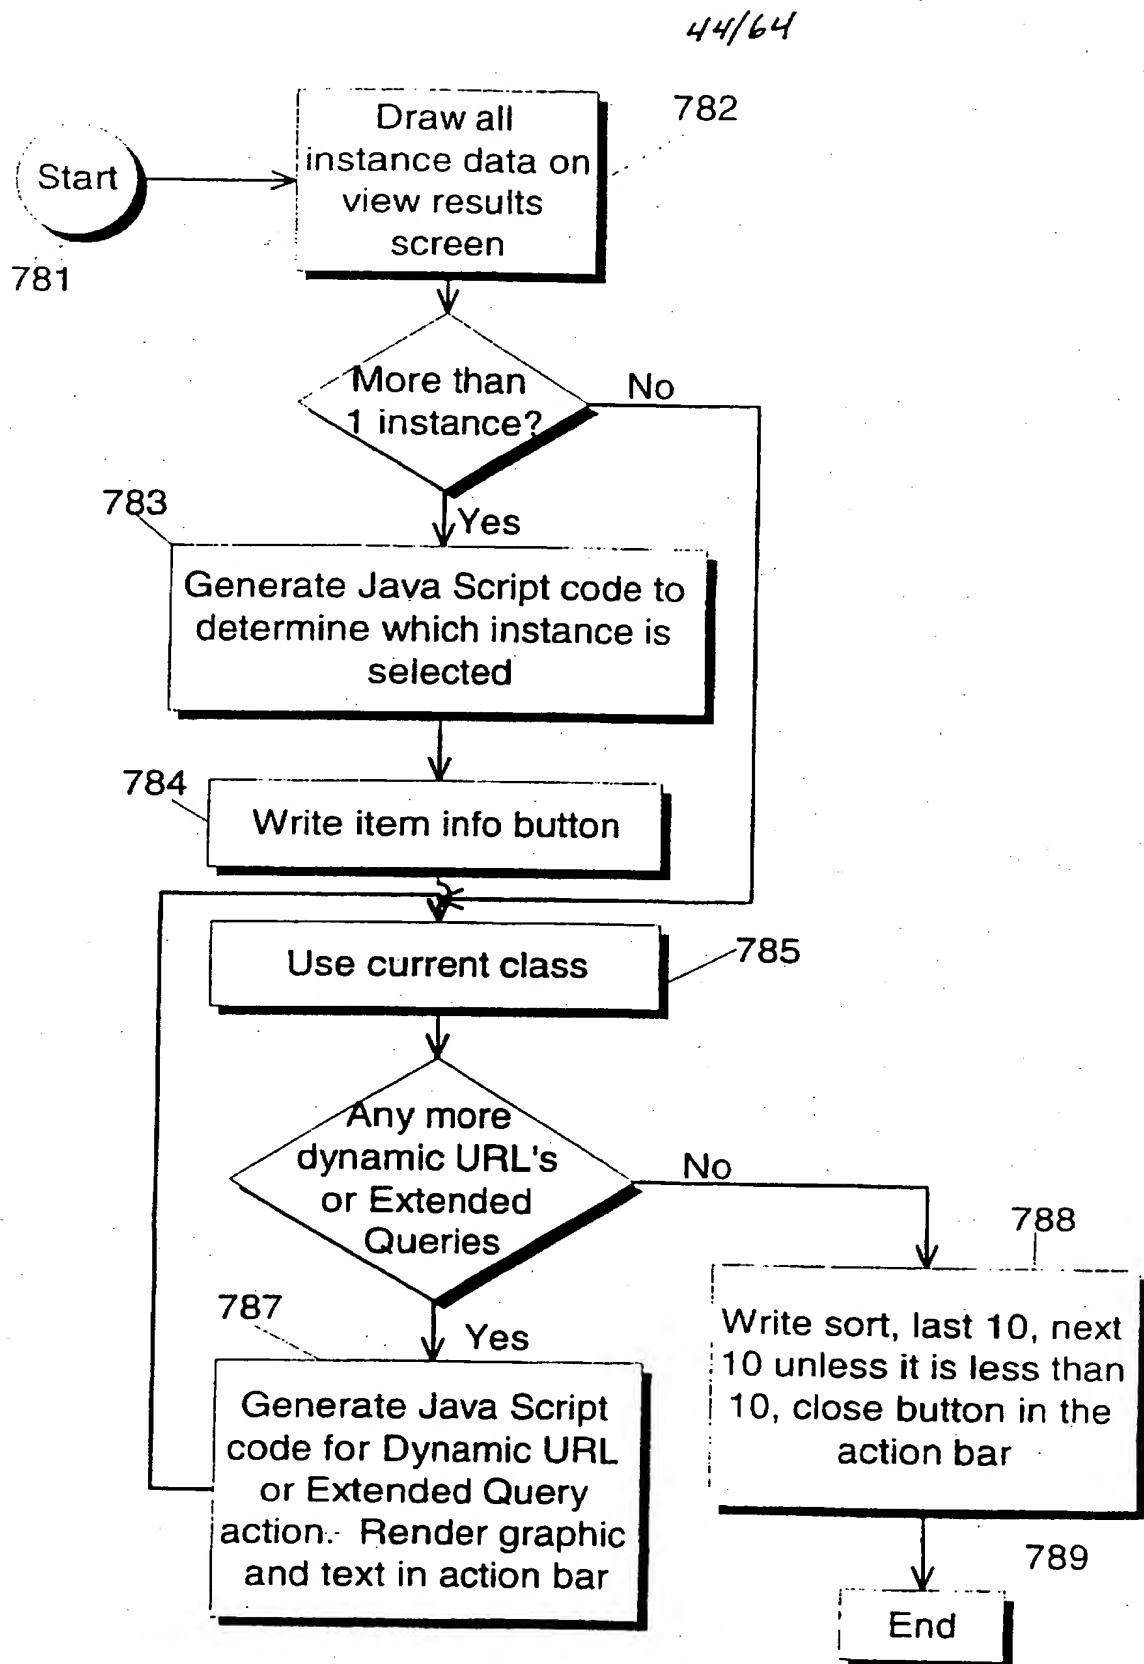


FIG. 43

45/64

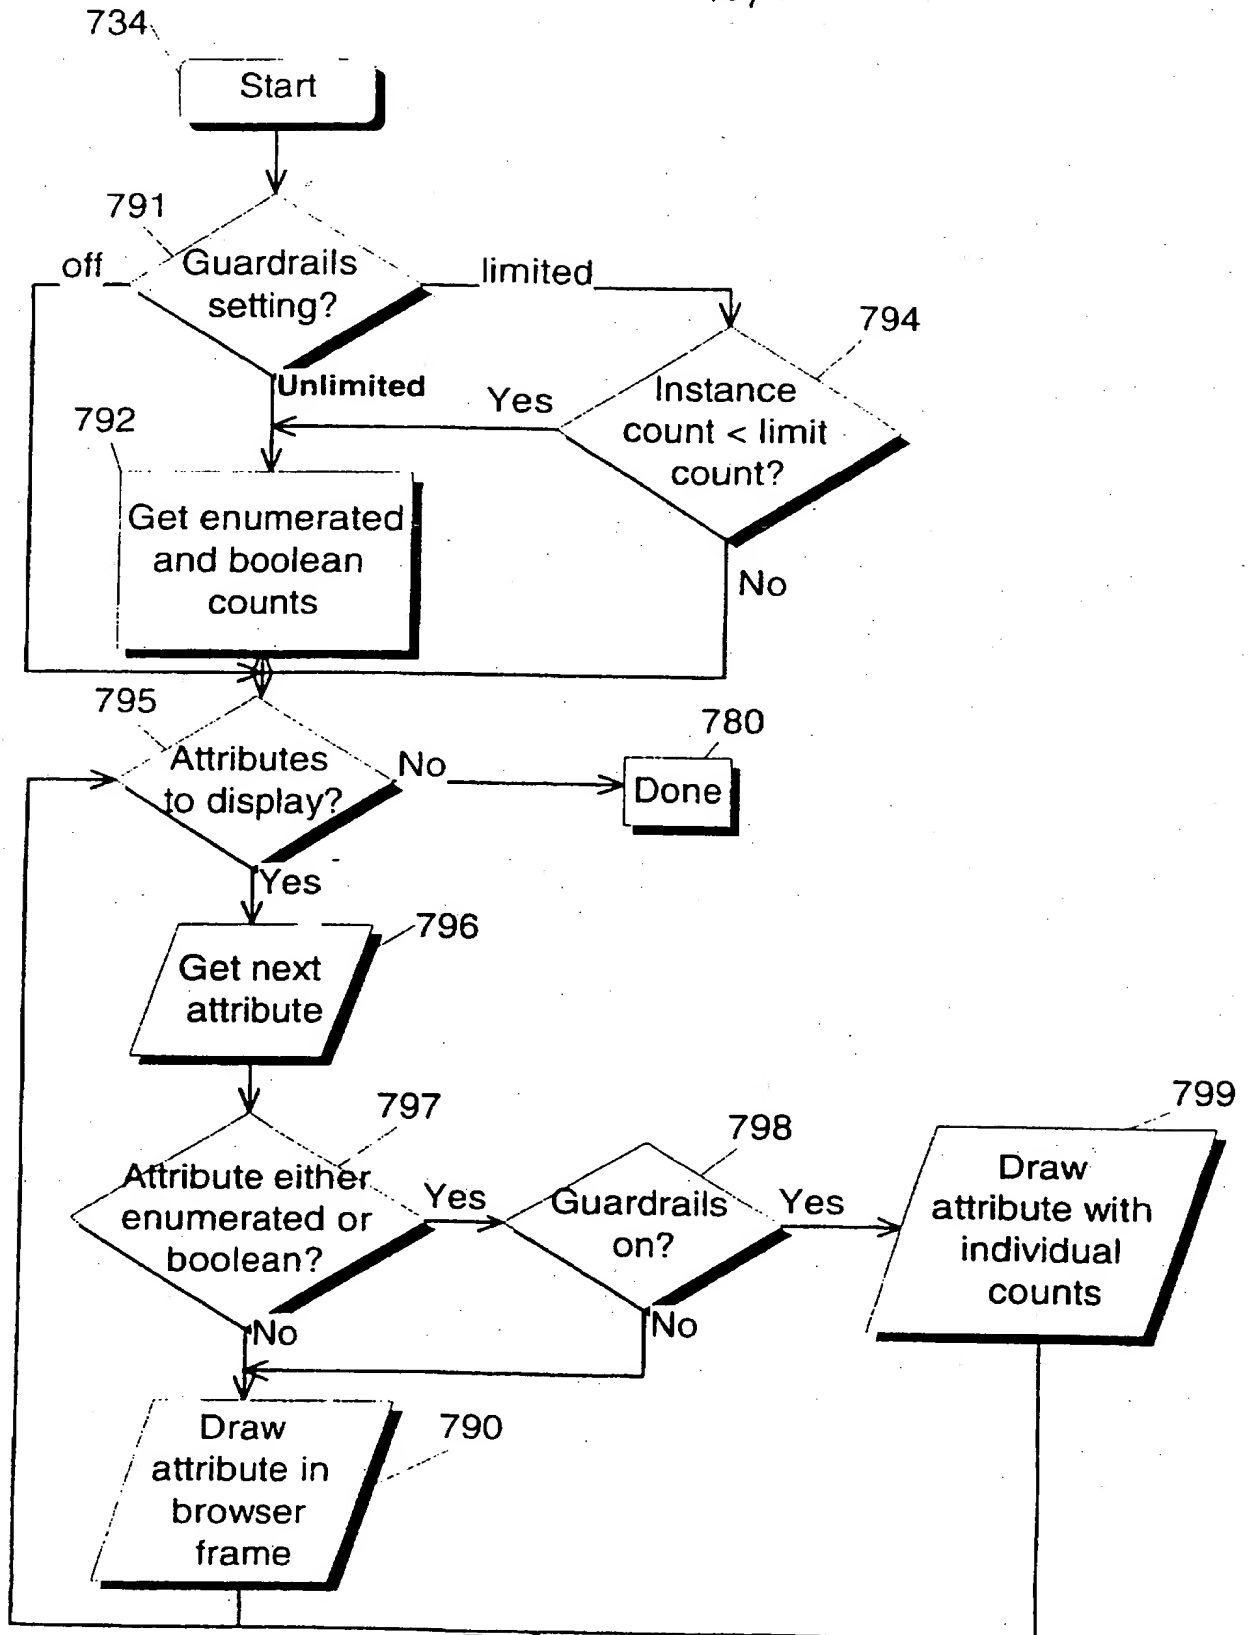


FIG. 44

46/64

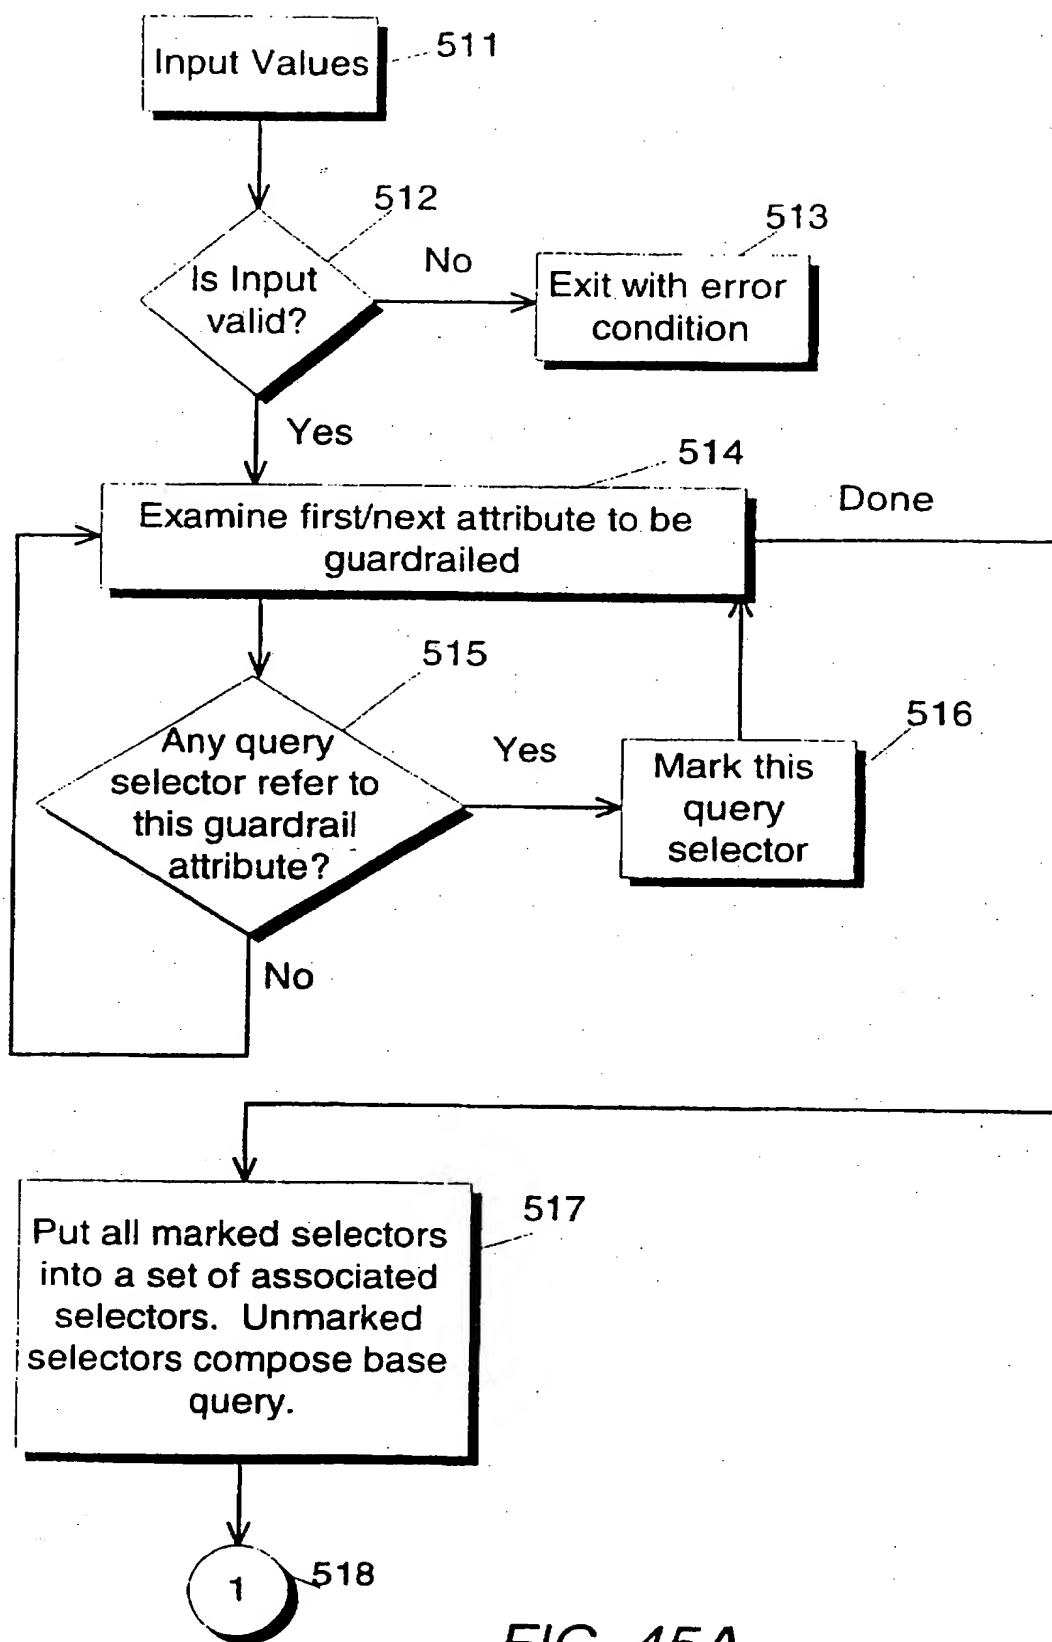


FIG. 45A

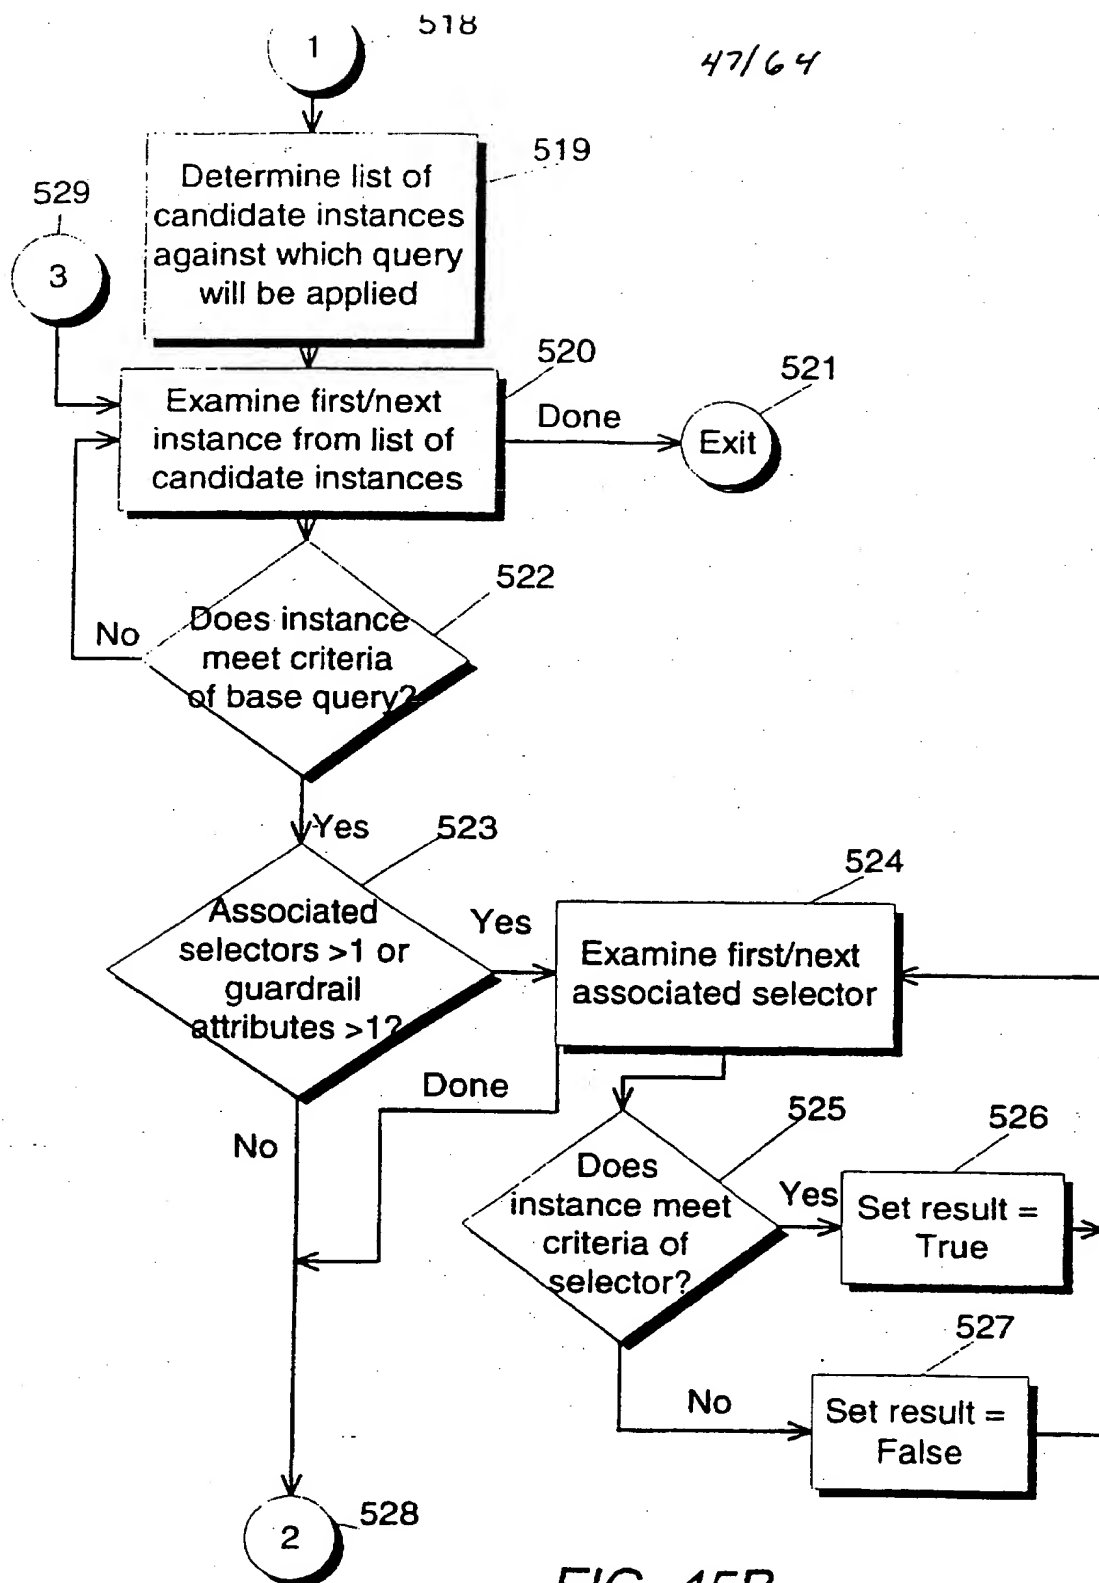


FIG. 45B

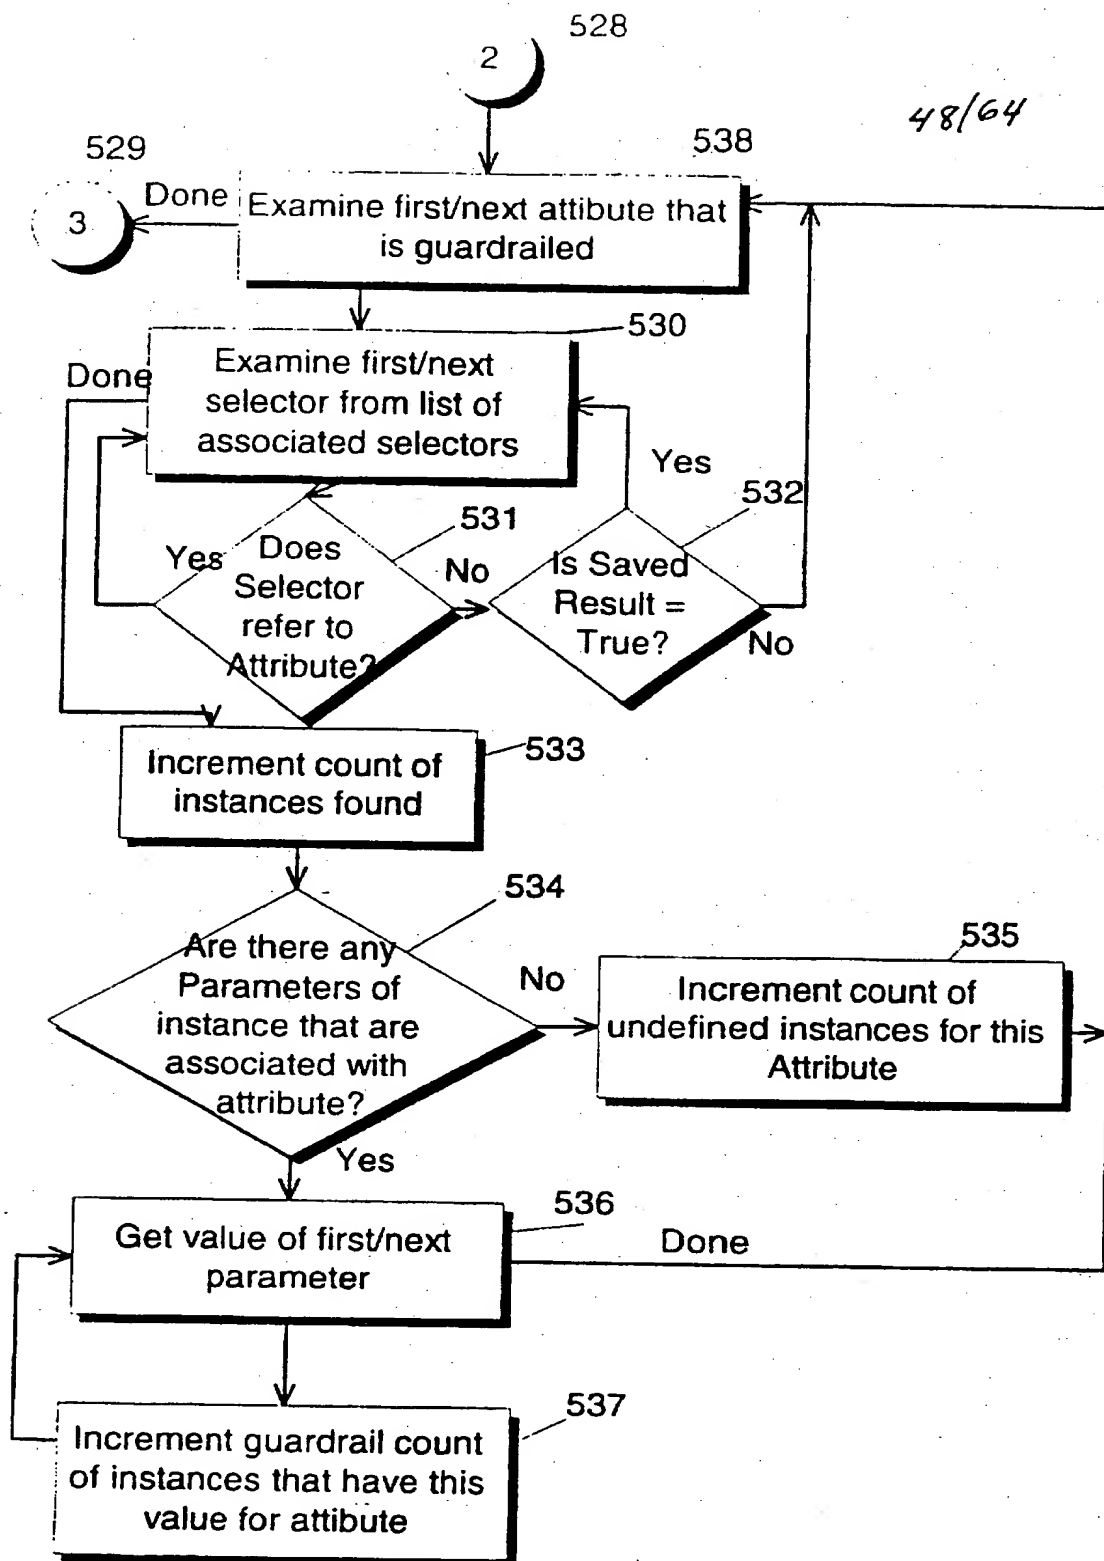


FIG. 45C



49/64

**CADIS-PMX**

File Find Options Tools Window Help

**ifil - Parts Specification**

Query type: Global

Parts Found: 7

	Attribute	Search Criteria
1	Vendor Device No.	T
2	Customer Part Number	T
	Vendor Name	()
	Address	T
	Telephone	()
	Discount Rate	1/2

242/

Parts

Display Edit Add

Display Order Set All Clear All

Search Criteria Clear All Clear Selected

240 241 242 243 244 245 246 247 248 290

FIG. 46

50/64

**CADIS-PMX**

File Find Options Tools Window Help

**Parts Specification**

Query type: Global

Parts Found: 0

Attribute	Vendor Device No.	Customer Part Number	Vendor Name
1		T	
2		T	
3			
4			
5			
6			

**Add Part**

Attribute: L3  
Vendor Device No.: L3  
Customer Part Number: L5  
Vendor Name: L5

**Parts**

Display Edit Add

**Values**

Discount Rate: 3/8

Add Cancel

FIG. 47

51/64



CADIS-PMX																			
File Find Options Window Help																			
		Query type: Global																	
fifl - Parts Specification																			
Parts Found: 7 		Search Criteria <input checked="" type="checkbox"/> Vendor Device No. <input type="checkbox"/> Attribute																	
fifl - Parts Editor																			
		<div style="margin-bottom: 10px;"> <input checked="" type="checkbox"/> <input type="checkbox"/> X <input checked="" type="checkbox"/> Defining Class is Class 5         </div> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Vendor Device No.</th> <th style="width: 70%;">Customer Part Number</th> </tr> </thead> <tbody> <tr><td>1 Acme</td><td>Defining Class is Class 5</td></tr> <tr><td>2 Acme</td><td>Defining Class is Class 5</td></tr> <tr><td>3 Acme</td><td>Defining Class is Class 5</td></tr> <tr><td>4 Acme</td><td>Defining Class is Class 5</td></tr> <tr><td>5 Acme</td><td>Defining Class is Class 5</td></tr> <tr><td>6 Acme</td><td>Defining Class is Class 5</td></tr> <tr><td>7 Acme</td><td>Defining Class is Class 5</td></tr> </tbody> </table>		Vendor Device No.	Customer Part Number	1 Acme	Defining Class is Class 5	2 Acme	Defining Class is Class 5	3 Acme	Defining Class is Class 5	4 Acme	Defining Class is Class 5	5 Acme	Defining Class is Class 5	6 Acme	Defining Class is Class 5	7 Acme	Defining Class is Class 5
Vendor Device No.	Customer Part Number																		
1 Acme	Defining Class is Class 5																		
2 Acme	Defining Class is Class 5																		
3 Acme	Defining Class is Class 5																		
4 Acme	Defining Class is Class 5																		
5 Acme	Defining Class is Class 5																		
6 Acme	Defining Class is Class 5																		
7 Acme	Defining Class is Class 5																		
<input type="button" value="Display"/>		<input type="button" value="Sort..."/> <input type="button" value="Info..."/> <input type="button" value="Move"/> <input type="button" value="Delete"/>																	
Part count: 7																			

FIG. 48

52/64

**CADIS-PMX**

**File Find Options Tools Window Help**

---

**Parts Found: 22**

**ffff - Parts Specification** Query type: Global

#	Attribute	Search Criteria	Operator
1	Vendor Device No.	T	
2	Customer Part Number	T	
3	Vendor Name	T	
4	Address	T	
5	Telephone	T	
6	Discount Rate	T	


**ffff - Schema Developer**

#	Attribute	Search Criteria	Operator
1	Vendor Device No.	T	
2	Customer Part Number	T	
3	Vendor Name	T	
4	Address	T	
5	Telephone	T	
6	Discount Rate	T	

**Display**

FIG. 49

53/64

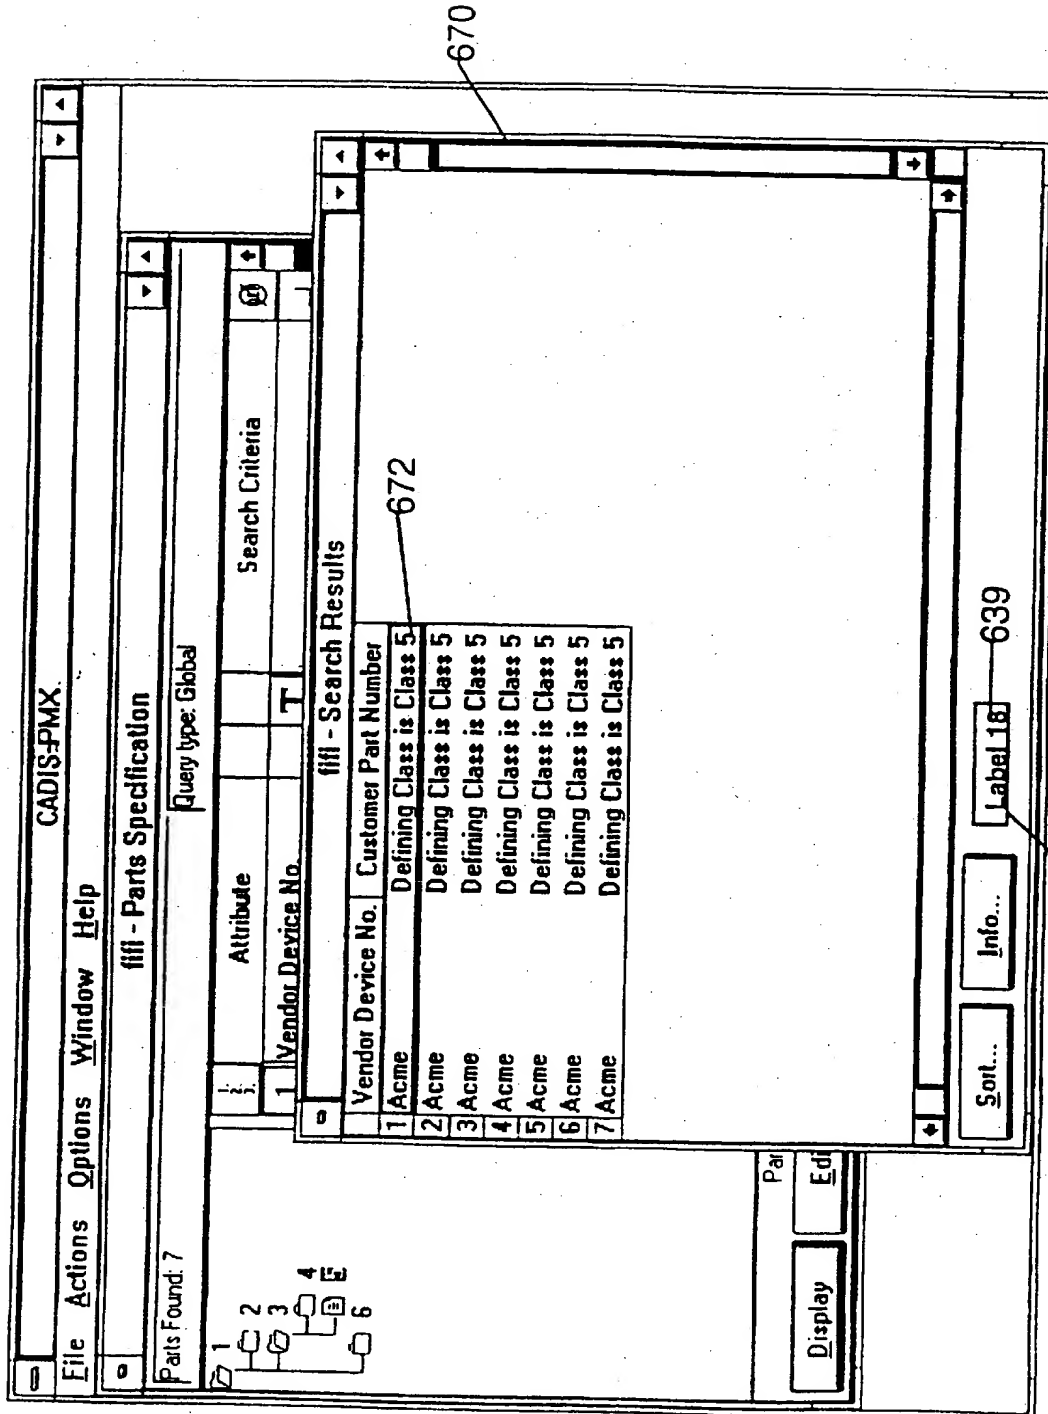

54/64

**Parts Editor**

Part count: 9

Steel

- ☐ 8-32
- ☐ 10-40
- ☐ 1/8"
- ☐ 1/4"
- ☐ 3/8"
- ☐ 1/2"
- ☐ 5/8"
- ☐ 3/4"
- ☐ 1"
- ☐ 1 1/4"
- ☐ 1 1/2"
- ☐ 2"
- ☐ 2 1/2"
- ☐ 3"
- ☐ 3 1/2"
- ☐ 4"
- ☐ 4 1/2"
- ☐ 5"
- ☐ 5 1/2"
- ☐ 6"
- ☐ 6 1/2"
- ☐ 7"
- ☐ 7 1/2"
- ☐ 8"
- ☐ 8 1/2"
- ☐ 9"
- ☐ 9 1/2"
- ☐ 10"
- ☐ 10 1/2"
- ☐ 11"
- ☐ 11 1/2"
- ☐ 12"
- ☐ 12 1/2"
- ☐ 13"
- ☐ 13 1/2"
- ☐ 14"
- ☐ 14 1/2"
- ☐ 15"
- ☐ 15 1/2"
- ☐ 16"
- ☐ 16 1/2"
- ☐ 17"
- ☐ 17 1/2"
- ☐ 18"
- ☐ 18 1/2"
- ☐ 19"
- ☐ 19 1/2"
- ☐ 20"
- ☐ 20 1/2"
- ☐ 21"
- ☐ 21 1/2"
- ☐ 22"
- ☐ 22 1/2"
- ☐ 23"
- ☐ 23 1/2"
- ☐ 24"
- ☐ 24 1/2"
- ☐ 25"
- ☐ 25 1/2"
- ☐ 26"
- ☐ 26 1/2"
- ☐ 27"
- ☐ 27 1/2"
- ☐ 28"
- ☐ 28 1/2"
- ☐ 29"
- ☐ 29 1/2"
- ☐ 30"
- ☐ 30 1/2"
- ☐ 31"
- ☐ 31 1/2"
- ☐ 32"
- ☐ 32 1/2"
- ☐ 33"
- ☐ 33 1/2"
- ☐ 34"
- ☐ 34 1/2"
- ☐ 35"
- ☐ 35 1/2"
- ☐ 36"
- ☐ 36 1/2"
- ☐ 37"
- ☐ 37 1/2"
- ☐ 38"
- ☐ 38 1/2"
- ☐ 39"
- ☐ 39 1/2"
- ☐ 40"
- ☐ 40 1/2"
- ☐ 41"
- ☐ 41 1/2"
- ☐ 42"
- ☐ 42 1/2"
- ☐ 43"
- ☐ 43 1/2"
- ☐ 44"
- ☐ 44 1/2"
- ☐ 45"
- ☐ 45 1/2"
- ☐ 46"
- ☐ 46 1/2"
- ☐ 47"
- ☐ 47 1/2"
- ☐ 48"
- ☐ 48 1/2"
- ☐ 49"
- ☐ 49 1/2"
- ☐ 50"
- ☐ 50 1/2"
- ☐ 51"
- ☐ 51 1/2"
- ☐ 52"
- ☐ 52 1/2"
- ☐ 53"
- ☐ 53 1/2"
- ☐ 54"
- ☐ 54 1/2"
- ☐ 55"
- ☐ 55 1/2"
- ☐ 56"
- ☐ 56 1/2"
- ☐ 57"
- ☐ 57 1/2"
- ☐ 58"
- ☐ 58 1/2"
- ☐ 59"
- ☐ 59 1/2"
- ☐ 60"
- ☐ 60 1/2"
- ☐ 61"
- ☐ 61 1/2"
- ☐ 62"
- ☐ 62 1/2"
- ☐ 63"
- ☐ 63 1/2"
- ☐ 64"
- ☐ 64 1/2"
- ☐ 65"
- ☐ 65 1/2"
- ☐ 66"
- ☐ 66 1/2"
- ☐ 67"
- ☐ 67 1/2"
- ☐ 68"
- ☐ 68 1/2"
- ☐ 69"
- ☐ 69 1/2"
- ☐ 70"
- ☐ 70 1/2"
- ☐ 71"
- ☐ 71 1/2"
- ☐ 72"
- ☐ 72 1/2"
- ☐ 73"
- ☐ 73 1/2"
- ☐ 74"
- ☐ 74 1/2"
- ☐ 75"
- ☐ 75 1/2"
- ☐ 76"
- ☐ 76 1/2"
- ☐ 77"
- ☐ 77 1/2"
- ☐ 78"
- ☐ 78 1/2"
- ☐ 79"
- ☐ 79 1/2"
- ☐ 80"
- ☐ 80 1/2"
- ☐ 81"
- ☐ 81 1/2"
- ☐ 82"
- ☐ 82 1/2"
- ☐ 83"
- ☐ 83 1/2"
- ☐ 84"
- ☐ 84 1/2"
- ☐ 85"
- ☐ 85 1/2"
- ☐ 86"
- ☐ 86 1/2"
- ☐ 87"
- ☐ 87 1/2"
- ☐ 88"
- ☐ 88 1/2"
- ☐ 89"
- ☐ 89 1/2"
- ☐ 90"
- ☐ 90 1/2"
- ☐ 91"
- ☐ 91 1/2"
- ☐ 92"
- ☐ 92 1/2"
- ☐ 93"
- ☐ 93 1/2"
- ☐ 94"
- ☐ 94 1/2"
- ☐ 95"
- ☐ 95 1/2"
- ☐ 96"
- ☐ 96 1/2"
- ☐ 97"
- ☐ 97 1/2"
- ☐ 98"
- ☐ 98 1/2"
- ☐ 99"
- ☐ 99 1/2"
- ☐ 100"
- ☐ 100 1/2"
- ☐ 101"
- ☐ 101 1/2"
- ☐ 102"
- ☐ 102 1/2"
- ☐ 103"
- ☐ 103 1/2"
- ☐ 104"
- ☐ 104 1/2"
- ☐ 105"
- ☐ 105 1/2"
- ☐ 106"
- ☐ 106 1/2"
- ☐ 107"
- ☐ 107 1/2"
- ☐ 108"
- ☐ 108 1/2"
- ☐ 109"
- ☐ 109 1/2"
- ☐ 110"
- ☐ 110 1/2"
- ☐ 111"
- ☐ 111 1/2"
- ☐ 112"
- ☐ 112 1/2"
- ☐ 113"
- ☐ 113 1/2"
- ☐ 114"
- ☐ 114 1/2"
- ☐ 115"
- ☐ 115 1/2"
- ☐ 116"
- ☐ 116 1/2"
- ☐ 117"
- ☐ 117 1/2"
- ☐ 118"
- ☐ 118 1/2"
- ☐ 119"
- ☐ 119 1/2"
- ☐ 120"
- ☐ 120 1/2"
- ☐ 121"
- ☐ 121 1/2"
- ☐ 122"
- ☐ 122 1/2"
- ☐ 123"
- ☐ 123 1/2"
- ☐ 124"
- ☐ 124 1/2"
- ☐ 125"
- ☐ 125 1/2"
- ☐ 126"
- ☐ 126 1/2"
- ☐ 127"
- ☐ 127 1/2"
- ☐ 128"
- ☐ 128 1/2"
- ☐ 129"
- ☐ 129 1/2"
- ☐ 130"
- ☐ 130 1/2"
- ☐ 131"
- ☐ 131 1/2"
- ☐ 132"
- ☐ 132 1/2"
- ☐ 133"
- ☐ 133 1/2"
- ☐ 134"
- ☐ 134 1/2"
- ☐ 135"
- ☐ 135 1/2"
- ☐ 136"
- ☐ 136 1/2"
- ☐ 137"
- ☐ 137 1/2"
- ☐ 138"
- ☐ 138 1/2"
- ☐ 139"
- ☐ 139 1/2"
- ☐ 140"
- ☐ 140 1/2"
- ☐ 141"
- ☐ 141 1/2"
- ☐ 142"
- ☐ 142 1/2"
- ☐ 143"
- ☐ 143 1/2"
- ☐ 144"
- ☐ 144 1/2"
- ☐ 145"
- ☐ 145 1/2"
- ☐ 146"
- ☐ 146 1/2"
- ☐ 147"
- ☐ 147 1/2"
- ☐ 148"
- ☐ 148 1/2"
- ☐ 149"
- ☐ 149 1/2"
- ☐ 150"
- ☐ 150 1/2"
- ☐ 151"
- ☐ 151 1/2"
- ☐ 152"
- ☐ 152 1/2"
- ☐ 153"
- ☐ 153 1/2"
- ☐ 154"
- ☐ 154 1/2"
- ☐ 155"
- ☐ 155 1/2"
- ☐ 156"
- ☐ 156 1/2"
- ☐ 157"
- ☐ 157 1/2"
- ☐ 158"
- ☐ 158 1/2"
- ☐ 159"
- ☐ 159 1/2"
- ☐ 160"
- ☐ 160 1/2"
- ☐ 161"
- ☐ 161 1/2"
- ☐ 162"
- ☐ 162 1/2"
- ☐ 163"
- ☐ 163 1/2"
- ☐ 164"
- ☐ 164 1/2"
- ☐ 165"
- ☐ 165 1/2"
- ☐ 166"
- ☐ 166 1/2"
- ☐ 167"
- ☐ 167 1/2"
- ☐ 168"
- ☐ 168 1/2"
- ☐ 169"
- ☐ 169 1/2"
- ☐ 170"
- ☐ 170 1/2"
- ☐ 171"
- ☐ 171 1/2"
- ☐ 172"
- ☐ 172 1/2"
- ☐ 173"
- ☐ 173 1/2"
- ☐ 174"
- ☐ 174 1/2"
- ☐ 175"
- ☐ 175 1/2"
- ☐ 176"
- ☐ 176 1/2"
- ☐ 177"
- ☐ 177 1/2"
- ☐ 178"
- ☐ 178 1/2"
- ☐ 179"
- ☐ 179 1/2"
- ☐ 180"
- ☐ 180 1/2"
- ☐ 181"
- ☐ 181 1/2"
- ☐ 182"
- ☐ 182 1/2"
- ☐ 183"
- ☐ 183 1/2"
- ☐ 184"
- ☐ 184 1/2"
- ☐ 185"
- ☐ 185 1/2"
- ☐ 186"
- ☐ 186 1/2"
- ☐ 187"
- ☐ 187 1/2"
- ☐ 188"
- ☐ 188 1/2"
- ☐ 189"
- ☐ 189 1/2"
- ☐ 190"
- ☐ 190 1/2"
- ☐ 191"
- ☐ 191 1/2"
- ☐ 192"
- ☐ 192 1/2"
- ☐ 193"
- ☐ 193 1/2"
- ☐ 194"
- ☐ 194 1/2"
- ☐ 195"
- ☐ 195 1/2"
- ☐ 196"
- ☐ 196 1/2"
- ☐ 197"
- ☐ 197 1/2"
- ☐ 198"
- ☐ 198 1/2"
- ☐ 199"
- ☐ 199 1/2"
- ☐ 200"
- ☐ 200 1/2"
- ☐ 201"
- ☐ 201 1/2"
- ☐ 202"
- ☐ 202 1/2"
- ☐ 203"
- ☐ 203 1/2"
- ☐ 204"
- ☐ 204 1/2"
- ☐ 205"
- ☐ 205 1/2"
- ☐ 206"
- ☐ 206 1/2"
- ☐ 207"
- ☐ 207 1/2"
- ☐ 208"
- ☐ 208 1/2"
- ☐ 209"
- ☐ 209 1/2"
- ☐ 210"
- ☐ 210 1/2"
- ☐ 211"
- ☐ 211 1/2"
- ☐ 212"
- ☐ 212 1/2"
- ☐ 213"
- ☐ 213 1/2"
- ☐ 214"
- ☐ 214 1/2"
- ☐ 215"
- ☐ 215 1/2"
- ☐ 216"
- ☐ 216 1/2"
- ☐ 217"
- ☐ 217 1/2"
- ☐ 218"
- ☐ 218 1/2"
- ☐ 219"
- ☐ 219 1/2"
- ☐ 220"
- ☐ 220 1/2"
- ☐ 221"
- ☐ 221 1/2"
- ☐ 222"
- ☐ 222 1/2"
- ☐ 223"
- ☐ 223 1/2"
- ☐ 224"
- ☐ 224 1/2"
- ☐ 225"
- ☐ 225 1/2"
- ☐ 226"
- ☐ 226 1/2"
- ☐ 227"
- ☐ 227 1/2"
- ☐ 228"
- ☐ 228 1/2"
- ☐ 229"
- ☐ 229 1/2"
- ☐ 230"
- ☐ 230 1/2"
- ☐ 231"
- ☐ 231 1/2"
- ☐ 232"
- ☐ 232 1/2"
- ☐ 233"
- ☐ 233 1/2"
- ☐ 234"
- ☐ 234 1/2"
- ☐ 235"
- ☐ 235 1/2"
- ☐ 236"
- ☐ 236 1/2"
- ☐ 237"
- ☐ 237 1/2"
- ☐ 238"
- ☐ 238 1/2"
- ☐ 239"
- ☐ 239 1/2"
- ☐ 240"
- ☐ 240 1/2"
- ☐ 241"
- ☐ 241 1/2"
- ☐ 242"
- ☐ 242 1/2"
- ☐ 243"
- ☐ 243 1/2"
- ☐ 244"
- ☐ 244 1/2"
- ☐ 245"
- ☐ 245 1/2"
- ☐ 246"
- ☐ 246 1/2"
- ☐ 247"
- ☐ 247 1/2"
- ☐ 248"
- ☐ 248 1/2"
- ☐ 249"
- ☐ 249 1/2"
- ☐ 250"
- ☐ 250 1/2"
- ☐ 251"
- ☐ 251 1/2"
- ☐ 252"
- ☐ 252 1/2"
- ☐ 253"
- ☐ 253 1/2"
- ☐ 254"
- ☐ 254 1/2"
- ☐ 255"
- ☐ 255 1/2"
- ☐ 256"
- ☐ 256 1/2"
- ☐ 257"
- ☐ 257 1/2"
- ☐ 258"
- ☐ 258 1/2"
- ☐ 259"
- ☐ 259 1/2"
- ☐ 260"
- ☐ 260 1/2"
- ☐ 261"
- ☐ 261 1/2"
- ☐ 262"
- ☐ 262 1/2"
- ☐ 263"
- ☐ 263 1/2"
- ☐ 264"
- ☐ 264 1/2"
- ☐ 265"
- ☐ 265 1/2"
- ☐ 266"
- ☐ 266 1/2"
- ☐ 267"
- ☐ 267 1/2"
- ☐ 268"
- ☐ 268 1/2"
- ☐ 269"
- ☐ 269 1/2"
- ☐ 270"
- ☐ 270 1/2"
- ☐ 271"
- ☐ 271 1/2"
- ☐ 272"
- ☐ 272 1/2"
- ☐ 273"
- ☐ 273 1/2"
- ☐ 274"
- ☐ 274 1/2"
- ☐ 275"
- ☐ 275 1/2"
- ☐ 276"
- ☐ 276 1/2"
- ☐ 277"
- ☐ 277 1/2"
- ☐ 278"
- ☐ 278 1/2"
- ☐ 279"
- ☐ 279 1/2"
- ☐ 280"
- ☐ 280 1/2"
- ☐ 281"
- ☐ 281 1/2"
- ☐ 282"
- ☐ 282 1/2"
- ☐ 283"
- ☐ 283 1/2"
- ☐ 284"
- ☐ 284 1/2"
- ☐ 285"
- ☐ 285 1/2"
- ☐ 286"
- ☐ 286 1/2"
- ☐ 287"
- ☐ 287 1/2"
- ☐ 288"
- ☐ 288 1/2"
- ☐ 289"
- ☐ 289 1/2"
- ☐ 290"
- ☐ 290 1/2"
- ☐ 291"
- ☐ 291 1/2"
- ☐ 292"
- ☐ 292 1/2"
- ☐ 293"
- ☐ 293 1/2"
- ☐ 294"
- ☐ 294 1/2"
- ☐ 295"
- ☐ 295 1/2"
- ☐ 296"
- ☐ 296 1/2"
- ☐ 297"
- ☐ 297 1/2"
- ☐ 298"
- ☐ 298 1/2"
- ☐ 299"
- ☐ 299 1/2"
- ☐ 300"
- ☐ 300 1/2"
- ☐ 301"
- ☐ 301 1/2"
- ☐ 302"
- ☐ 302 1/2"
- ☐ 303"
- ☐ 303 1/2"
- ☐ 304"
- ☐ 304 1/2"
- ☐ 305"
- ☐ 305 1/2"
- ☐ 306"
- ☐ 306 1/2"
- ☐ 307"
- ☐ 307 1/2"
- ☐ 308"
- ☐ 308 1/2"
- ☐ 309"
- ☐ 309 1/2"
- ☐ 310"
- ☐ 310 1/2"
- ☐ 311"
- ☐ 311 1/2"
- ☐ 312"
- ☐ 312 1/2"
- ☐ 313"
- ☐ 313 1/2"
- ☐ 314"
- ☐ 314 1/2"
- ☐ 315"
- ☐ 315 1/2"
- ☐ 316"
- ☐ 316 1/2"
- ☐ 317"
- ☐ 317 1/2"
- ☐ 318"
- ☐ 318 1/2"
- ☐ 319"
- ☐ 319 1/2"
- ☐ 320"
- ☐ 320 1/2"
- ☐ 321"
- ☐ 321 1/2"
- ☐ 322"
- ☐ 322 1/2"
- ☐ 323"
- ☐ 323 1/2"
- ☐ 324"
- ☐ 324 1/2"
- ☐ 325"
- ☐ 325 1/2"
- ☐ 326"
- ☐ 326 1/2"
- ☐ 327"
- ☐ 327 1/2"
- ☐ 328"
- ☐ 328 1/2"
- ☐ 329"
- ☐ 329 1/2"
- ☐ 330"
- ☐ 330 1/2"
- ☐ 331"
- ☐ 331 1/2"
- ☐ 332"
- ☐ 332 1/2"
- ☐ 333"
- ☐ 333 1/2"
- ☐ 334"
- ☐ 334 1/2"
- ☐ 335"
- ☐ 335 1/2"
- ☐ 336"
- ☐ 336 1/2"
- ☐ 337"
- ☐ 337 1/2"
- ☐ 338"
- ☐ 338 1/2"
- ☐ 339"
- ☐ 339 1/2"
- ☐ 340"
- ☐ 340 1/2"
- ☐ 341"
- ☐ 341 1/2"
- ☐ 342"
- ☐ 342 1/2"
- ☐ 343"
- ☐ 343 1/2"
- ☐ 344"
- ☐ 344 1/2"
- ☐ 345"
- ☐ 345 1/2"
- ☐ 346"
- ☐ 346 1/2"
- ☐ 347"
- ☐ 347 1/2"
- ☐ 348"
- ☐ 348 1/2"
- ☐ 349"
- ☐ 349 1/2"
- ☐ 350"
- ☐ 350 1/2"
- ☐ 351"
- ☐ 351 1/2"
- ☐ 352"
- ☐ 352 1/2"
- ☐ 353"
- ☐ 353 1/2"
- ☐ 354"
- ☐ 354 1/2"
- ☐ 355"
- ☐ 355 1/2"
- ☐ 356"
- ☐ 356 1/2"
- ☐ 357"
- ☐ 357 1/2"
- ☐ 358"
- ☐ 358 1/2"
- ☐ 359"
- ☐ 359 1/2"
- ☐ 360"
- ☐ 360 1/2"
- <

55/64

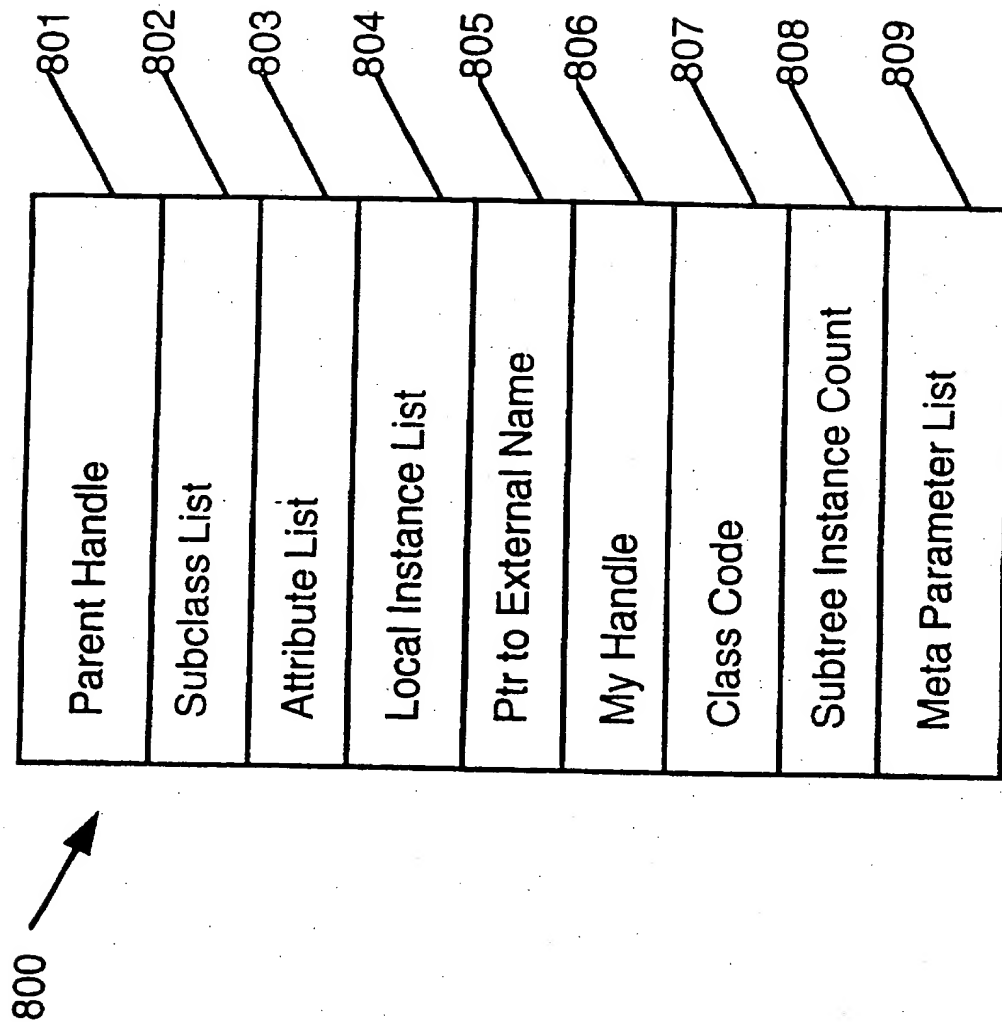


FIG. 52

56/64

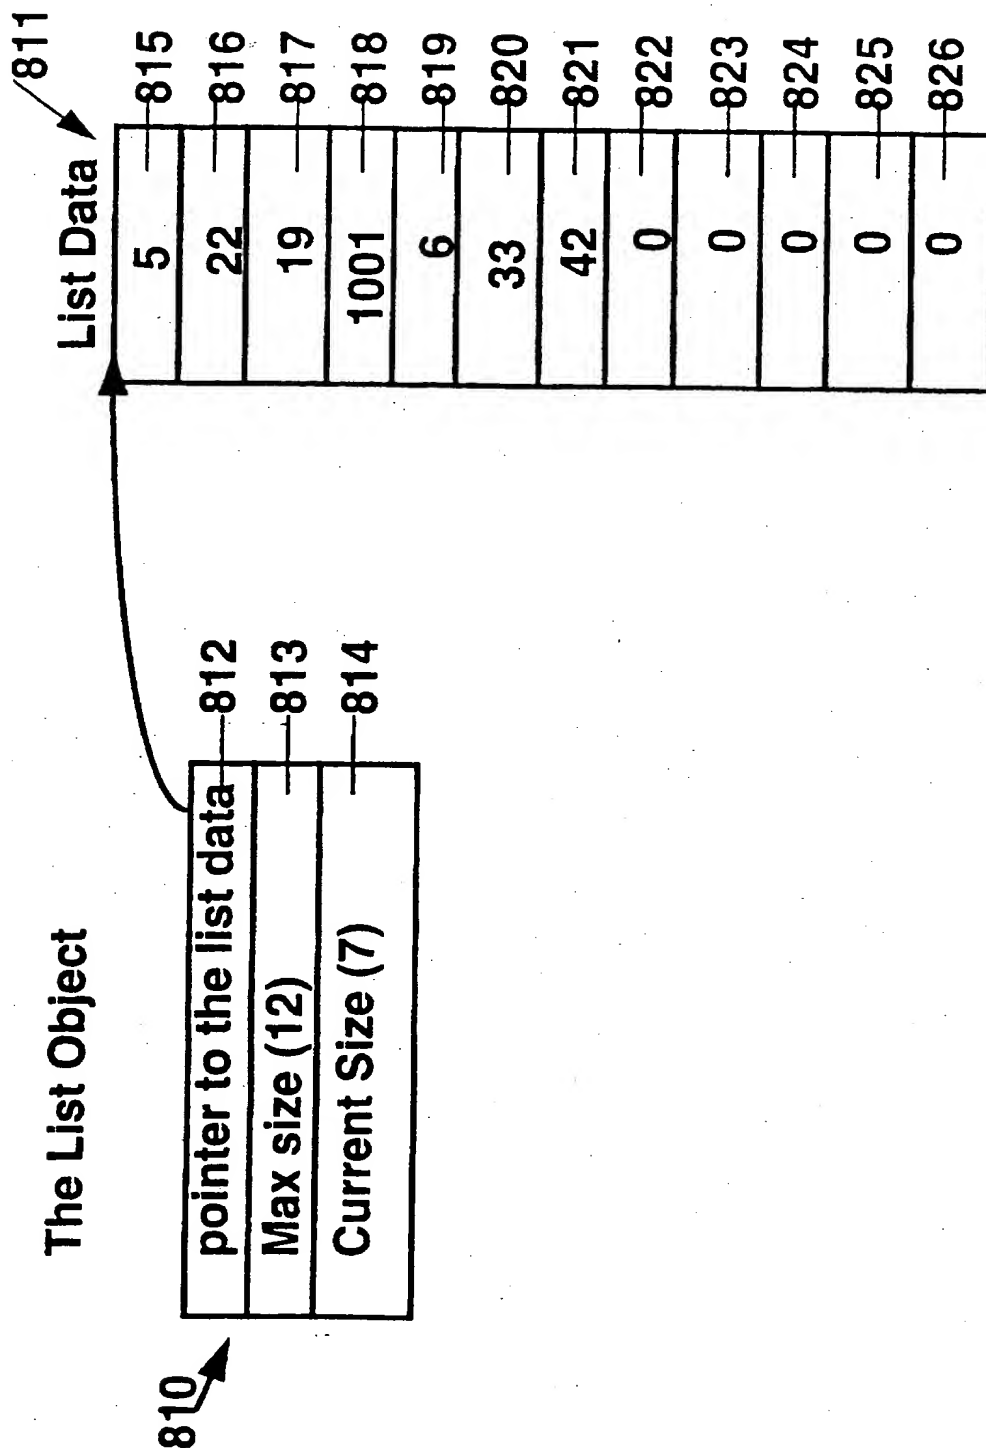


FIG. 53



57/64

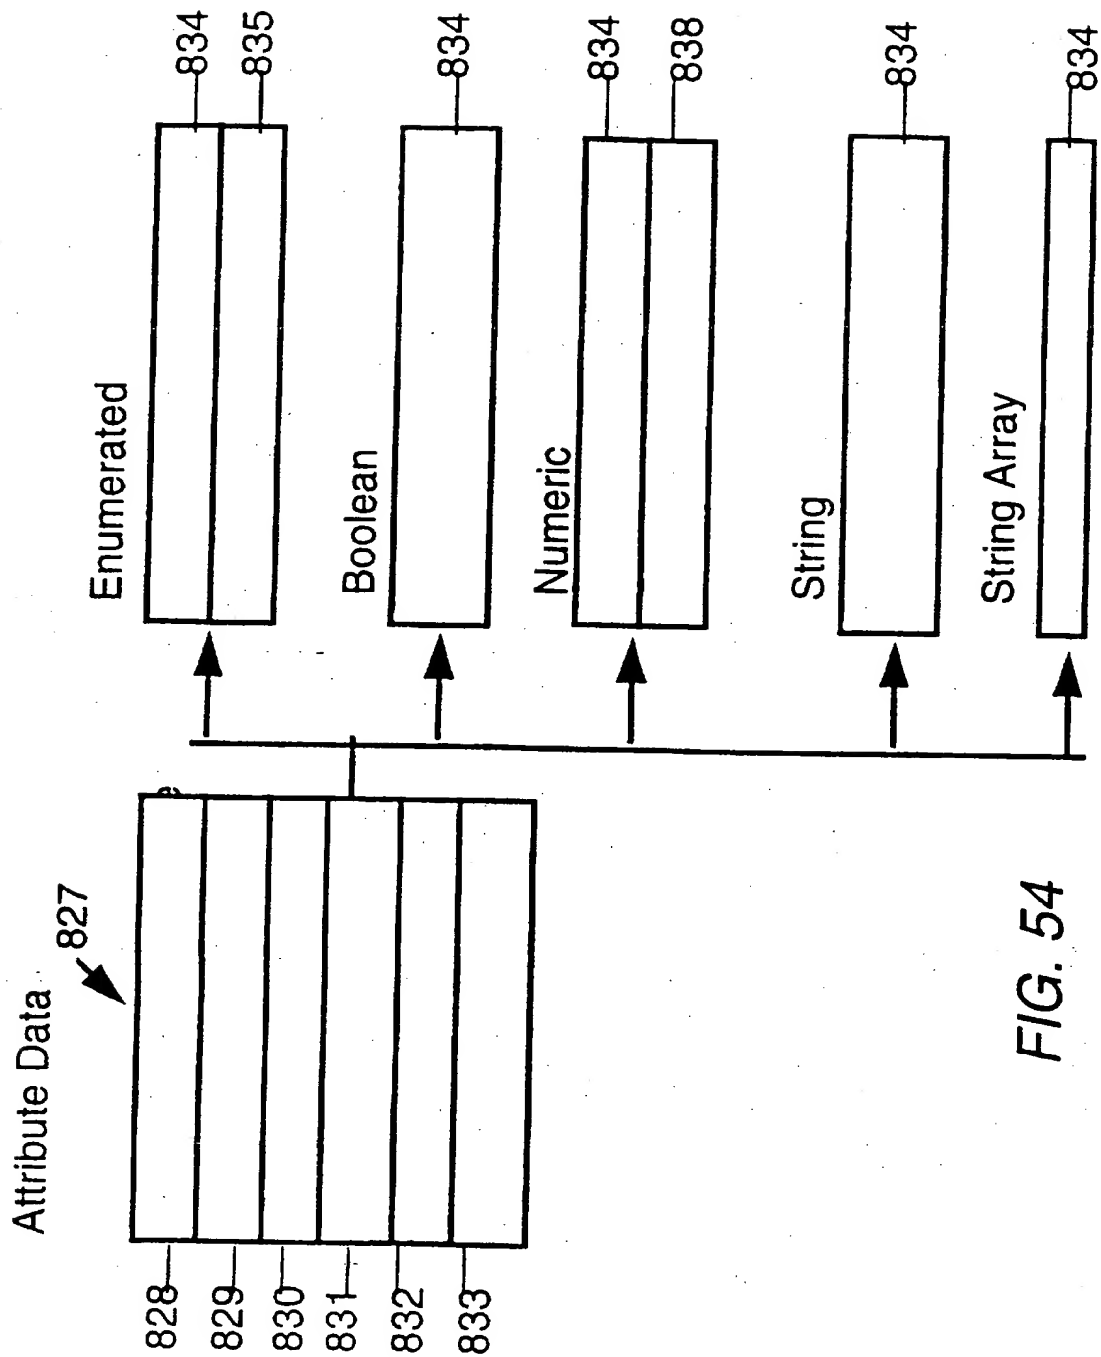


FIG. 54

58/64

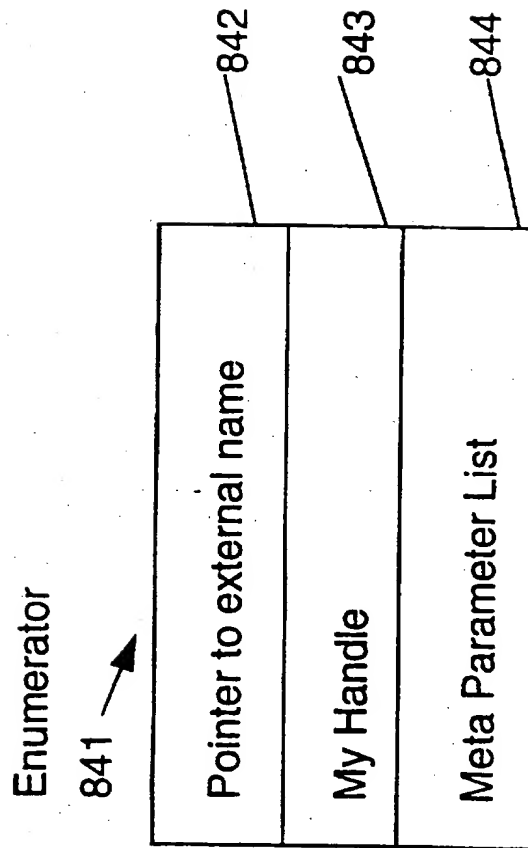


FIG. 55

59/64

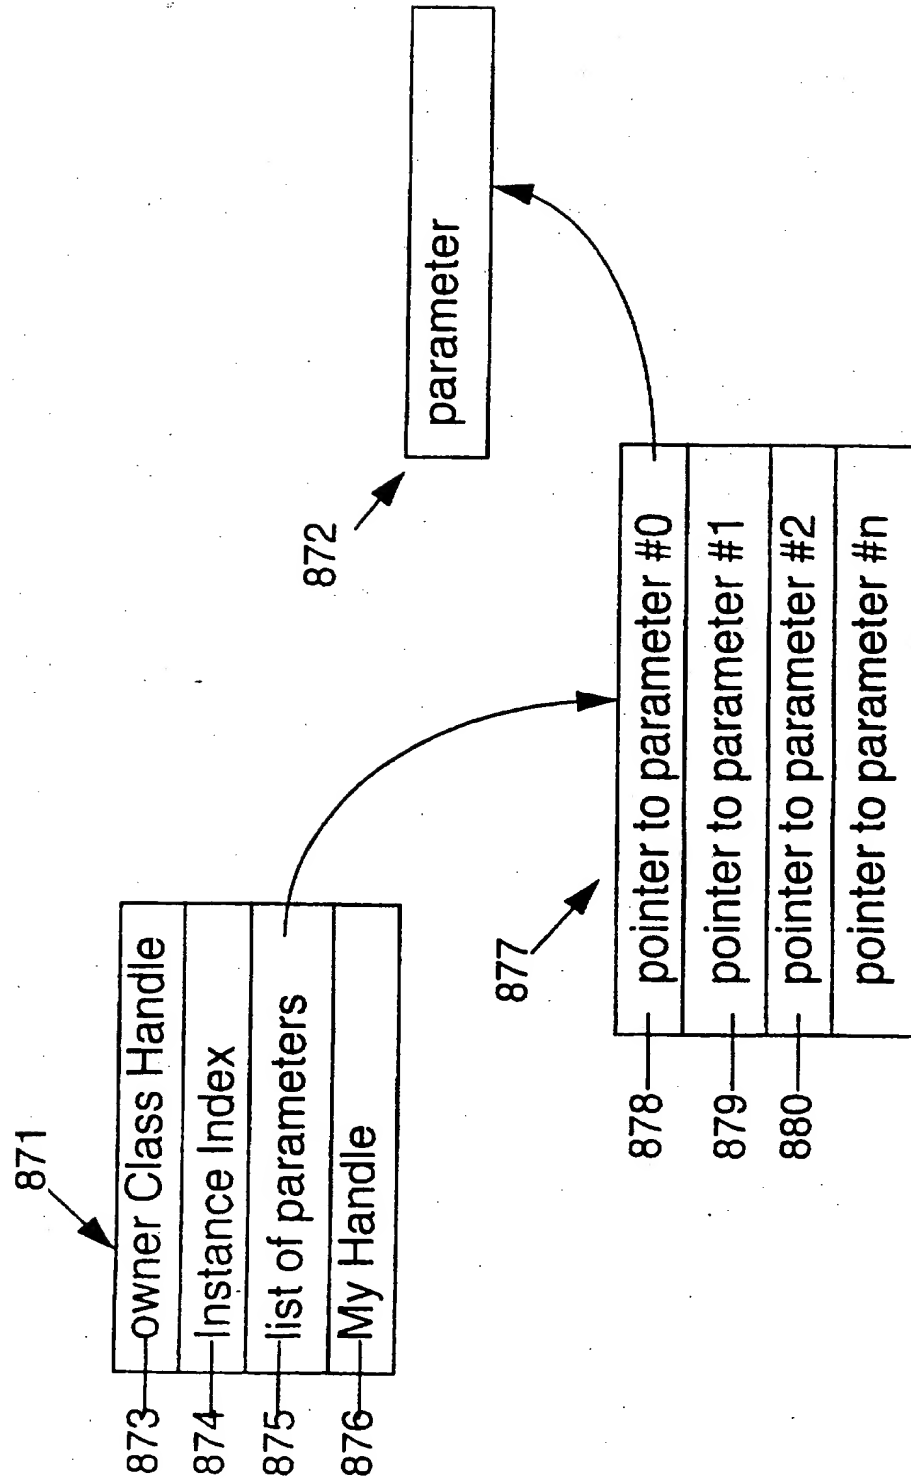


FIG. 56

60/64

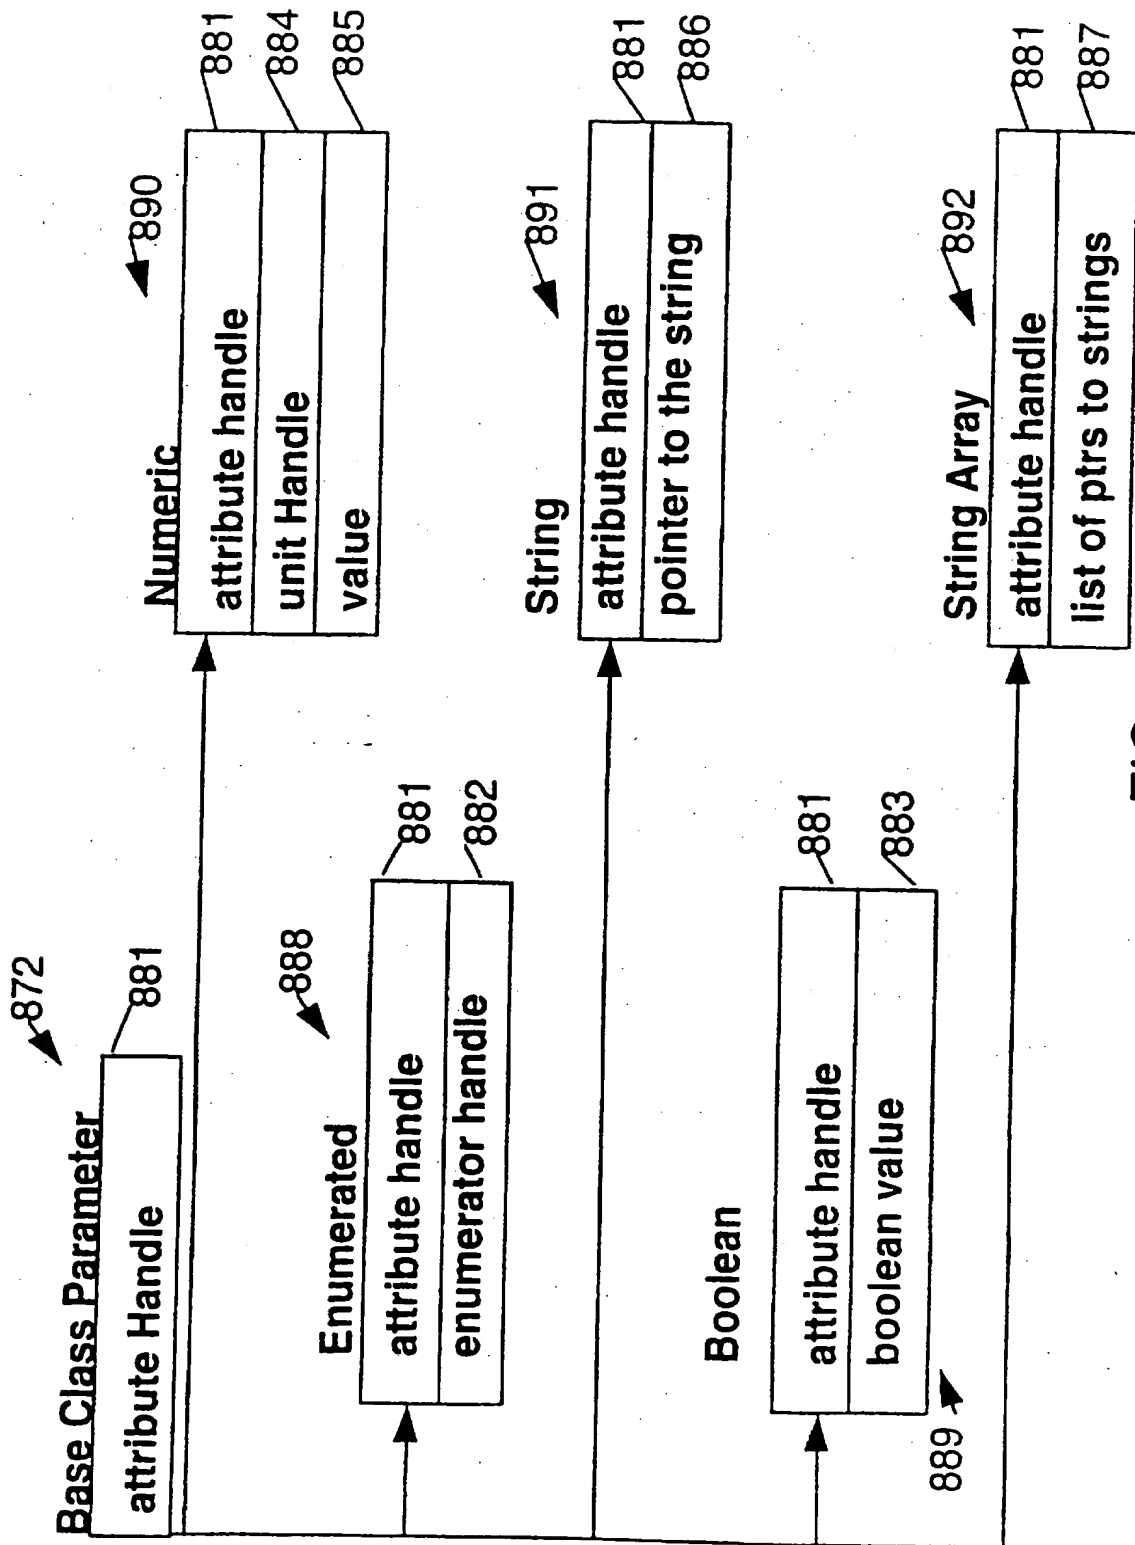


FIG. 57

64/64

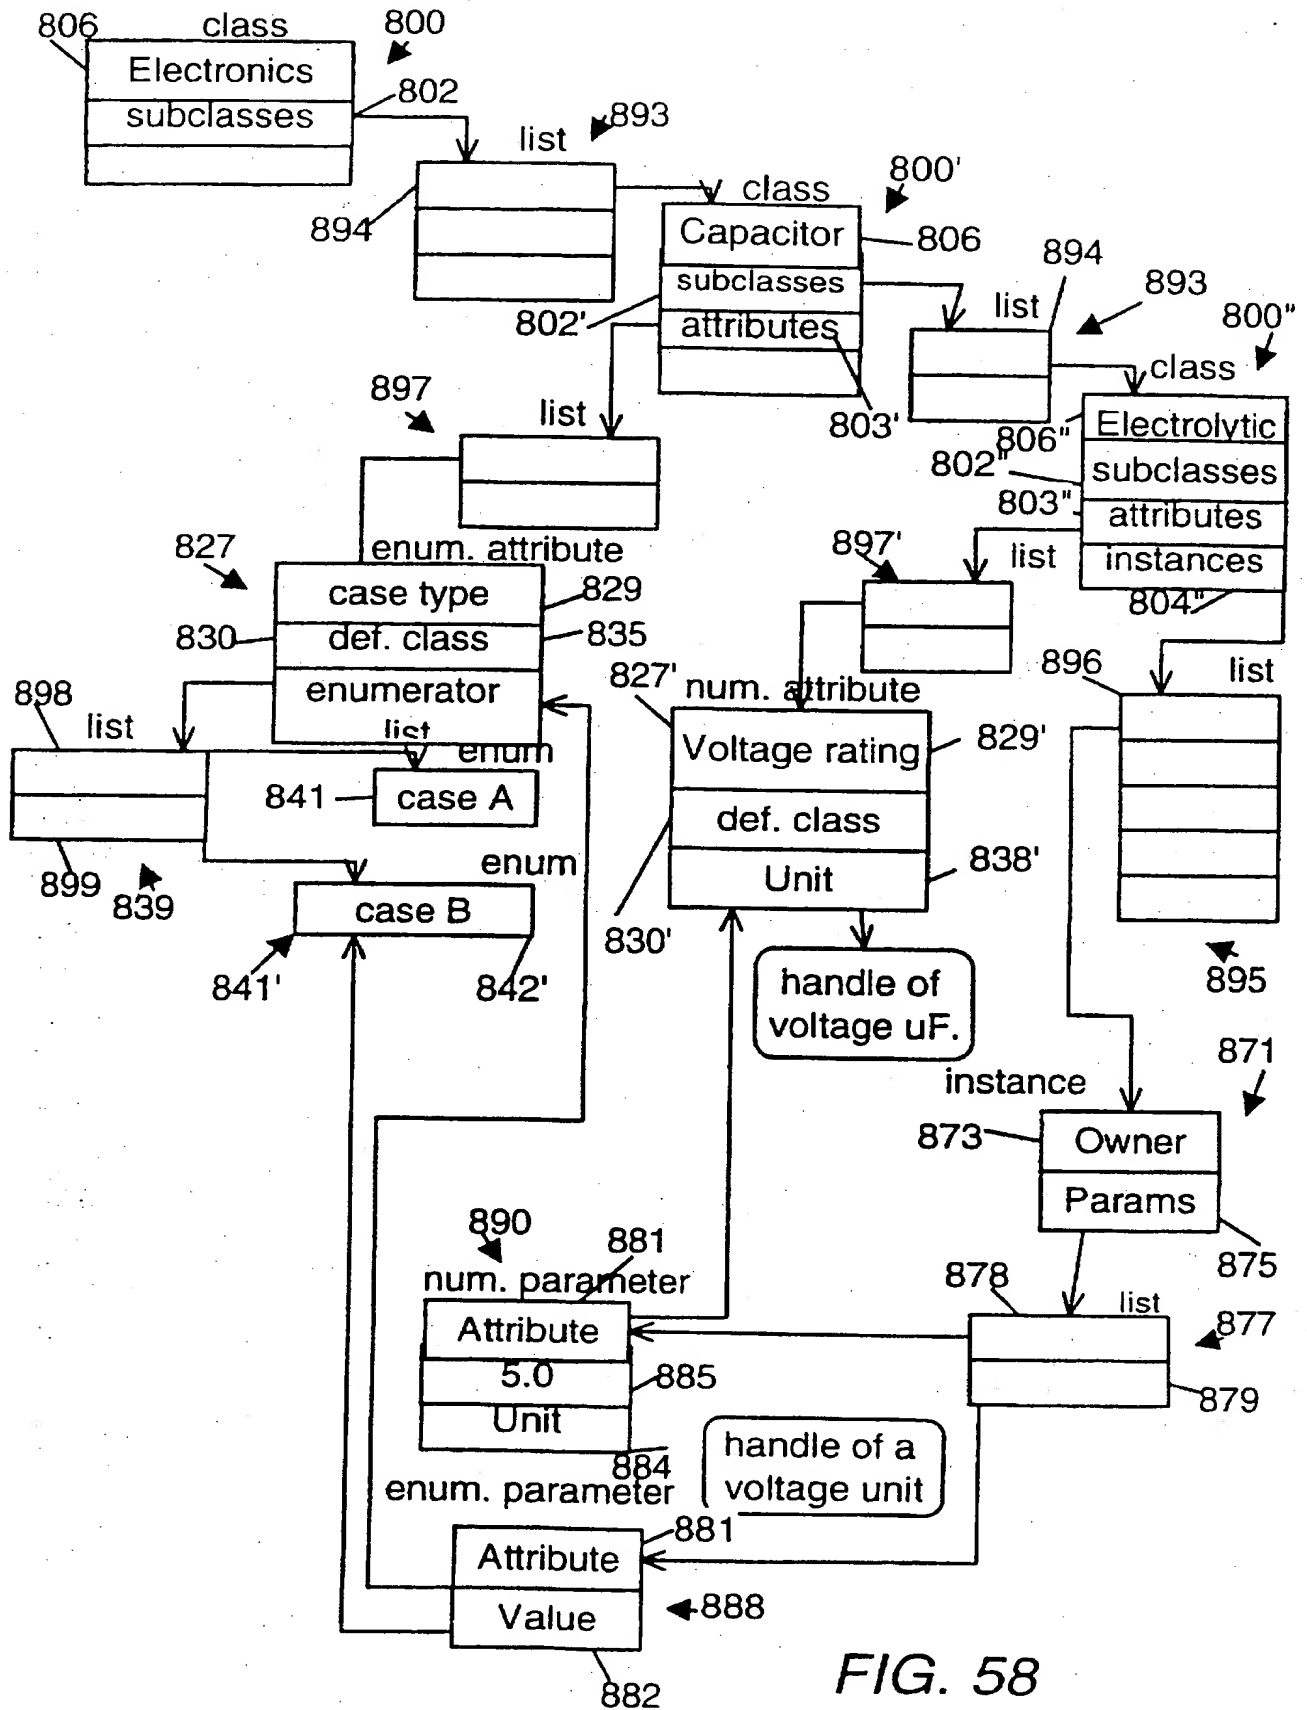


FIG. 58

62/64

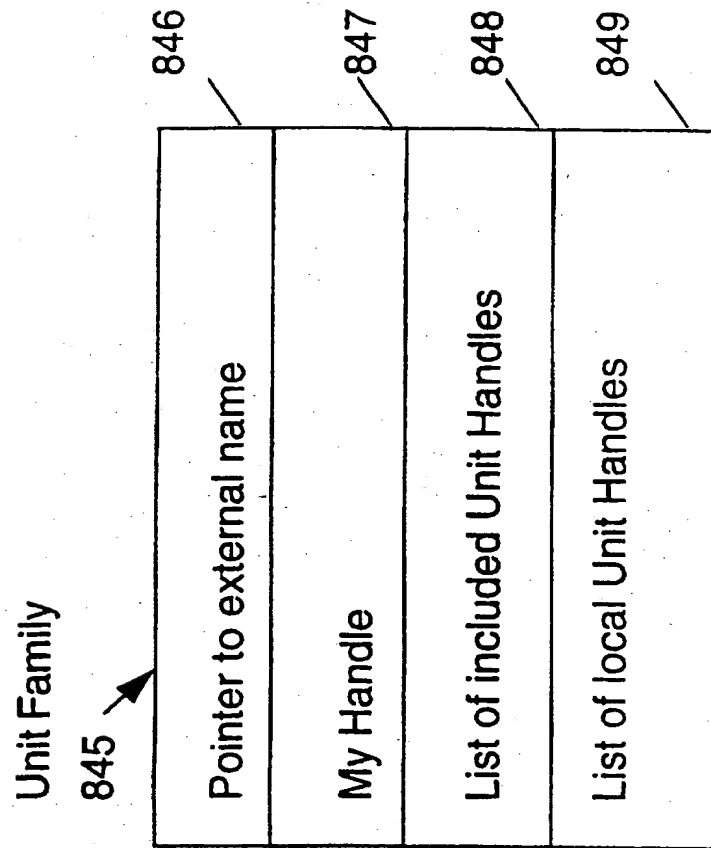


FIG. 59

63/64

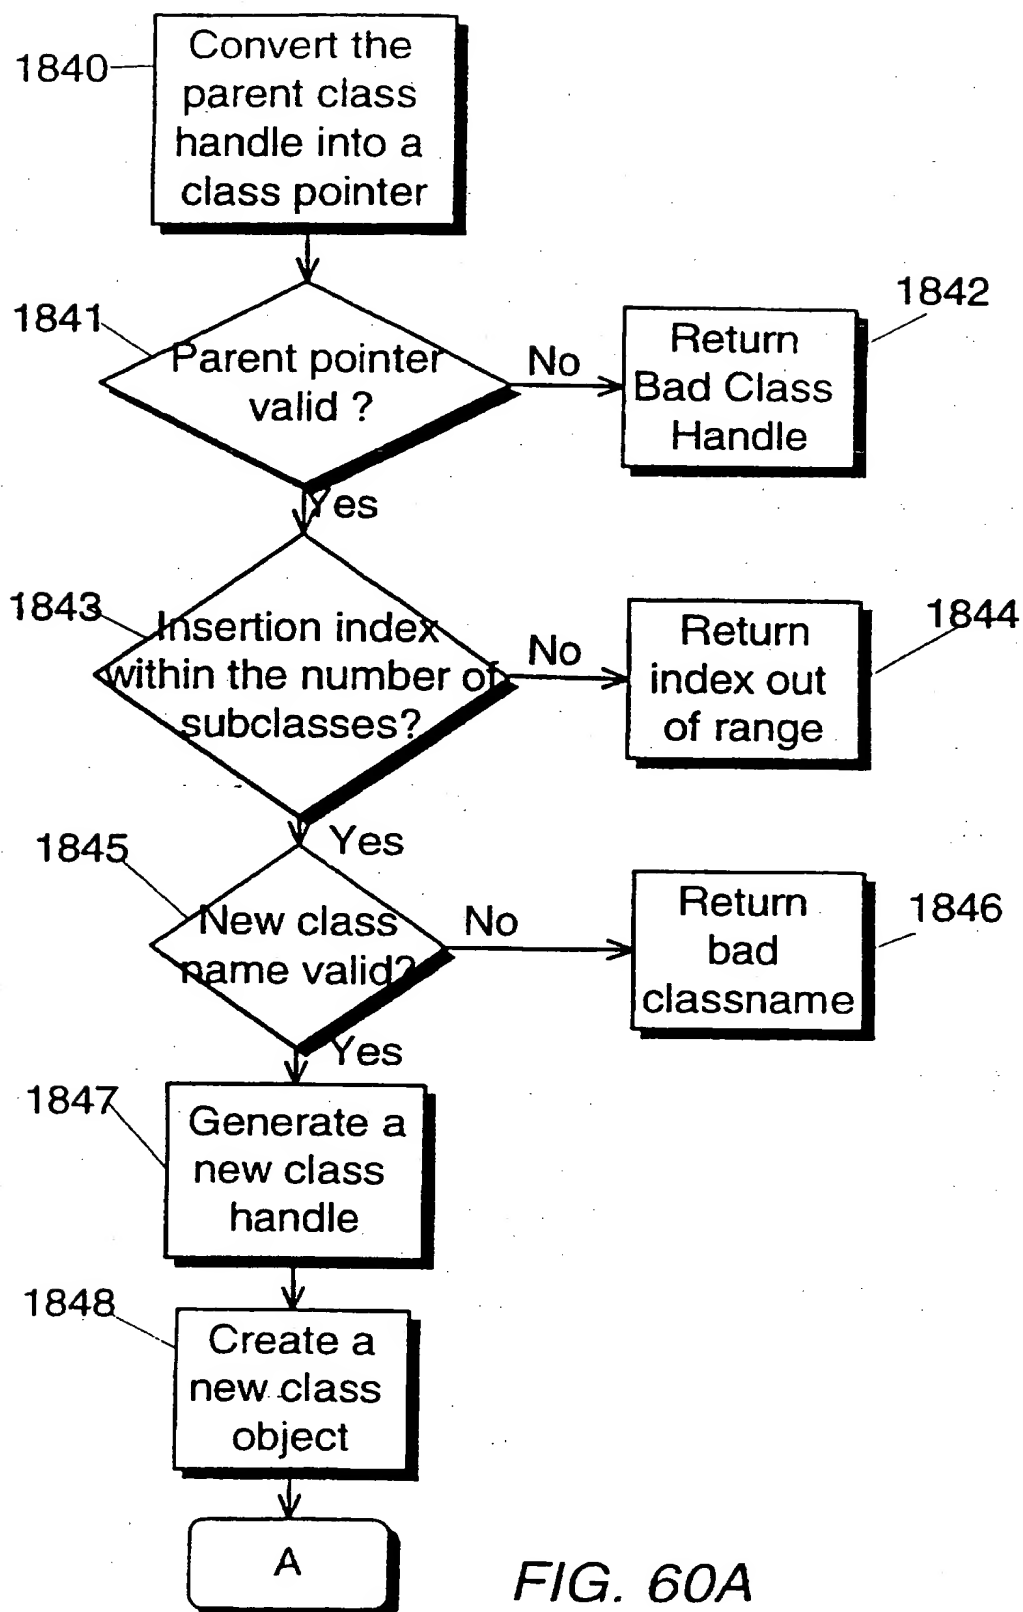


FIG. 60A

64/64

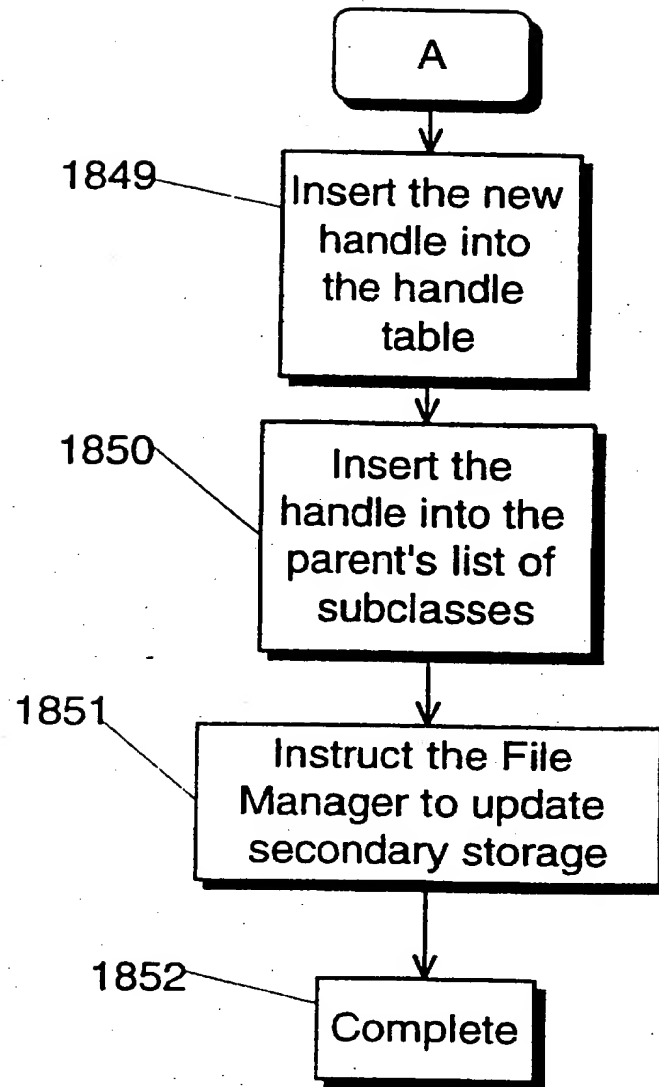


FIG. 60B



1/64

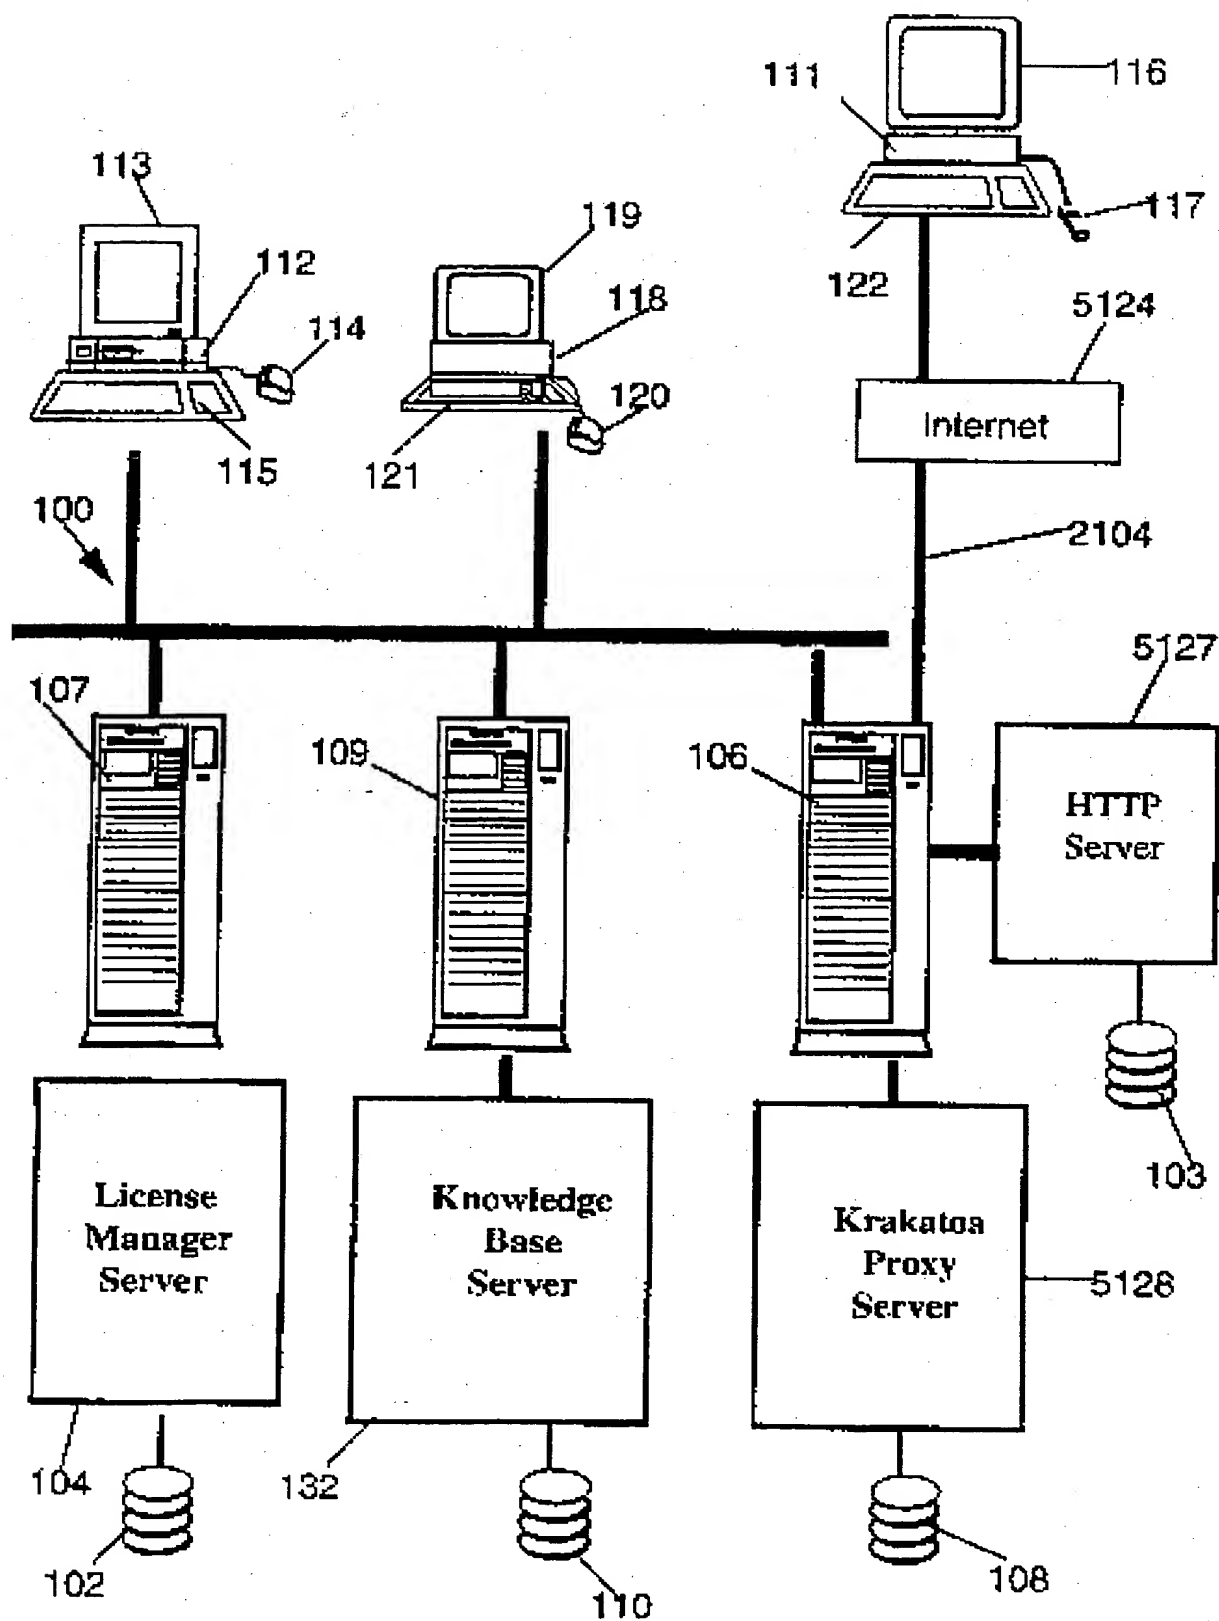


FIG. 1

2/64

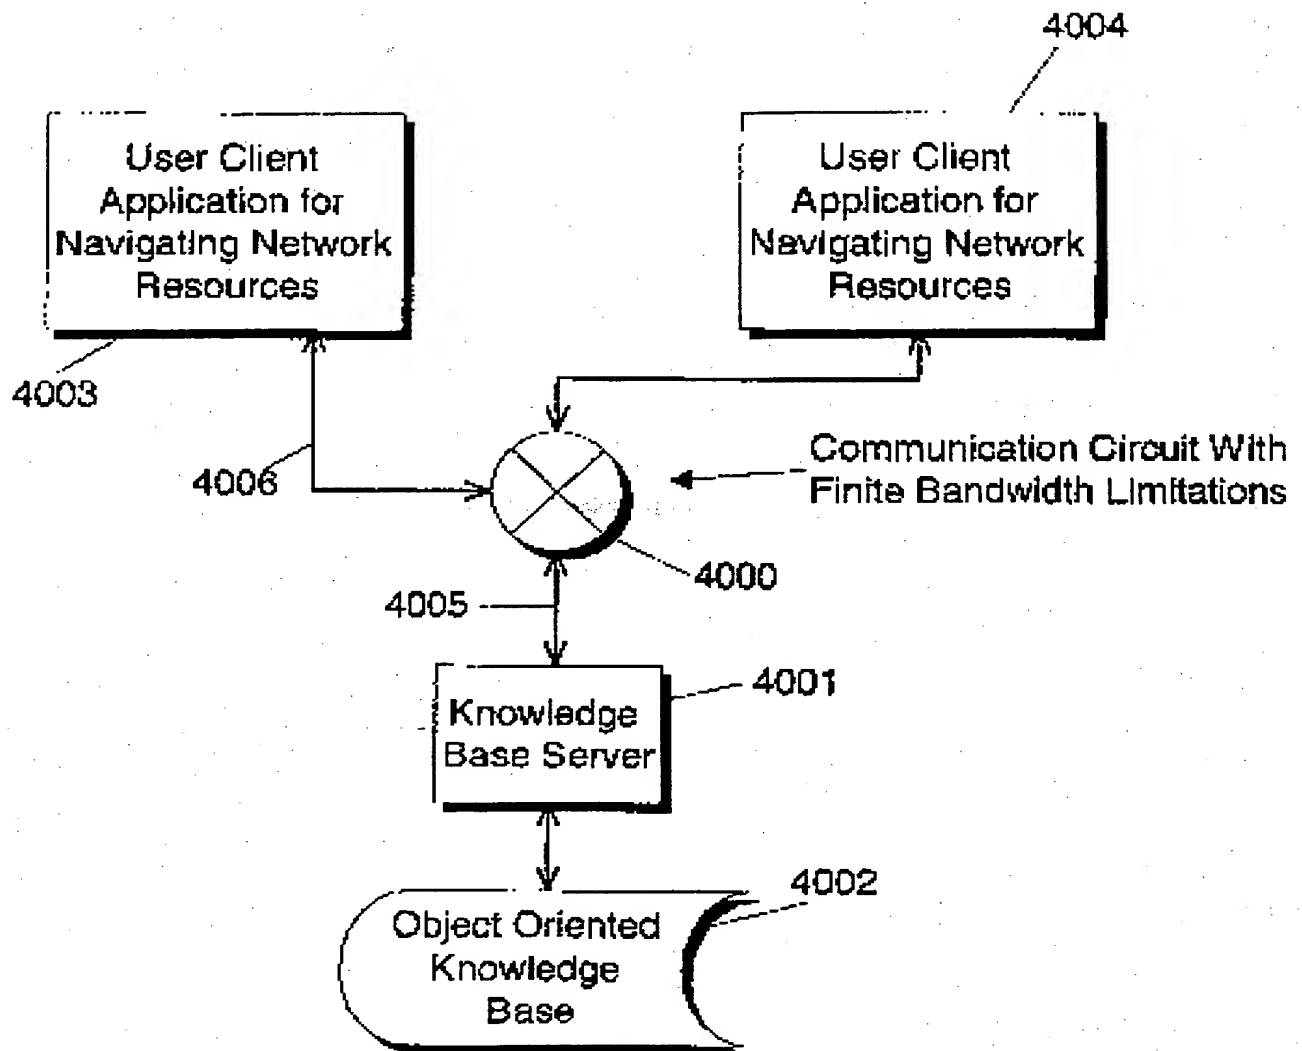


FIG. 2

3/64

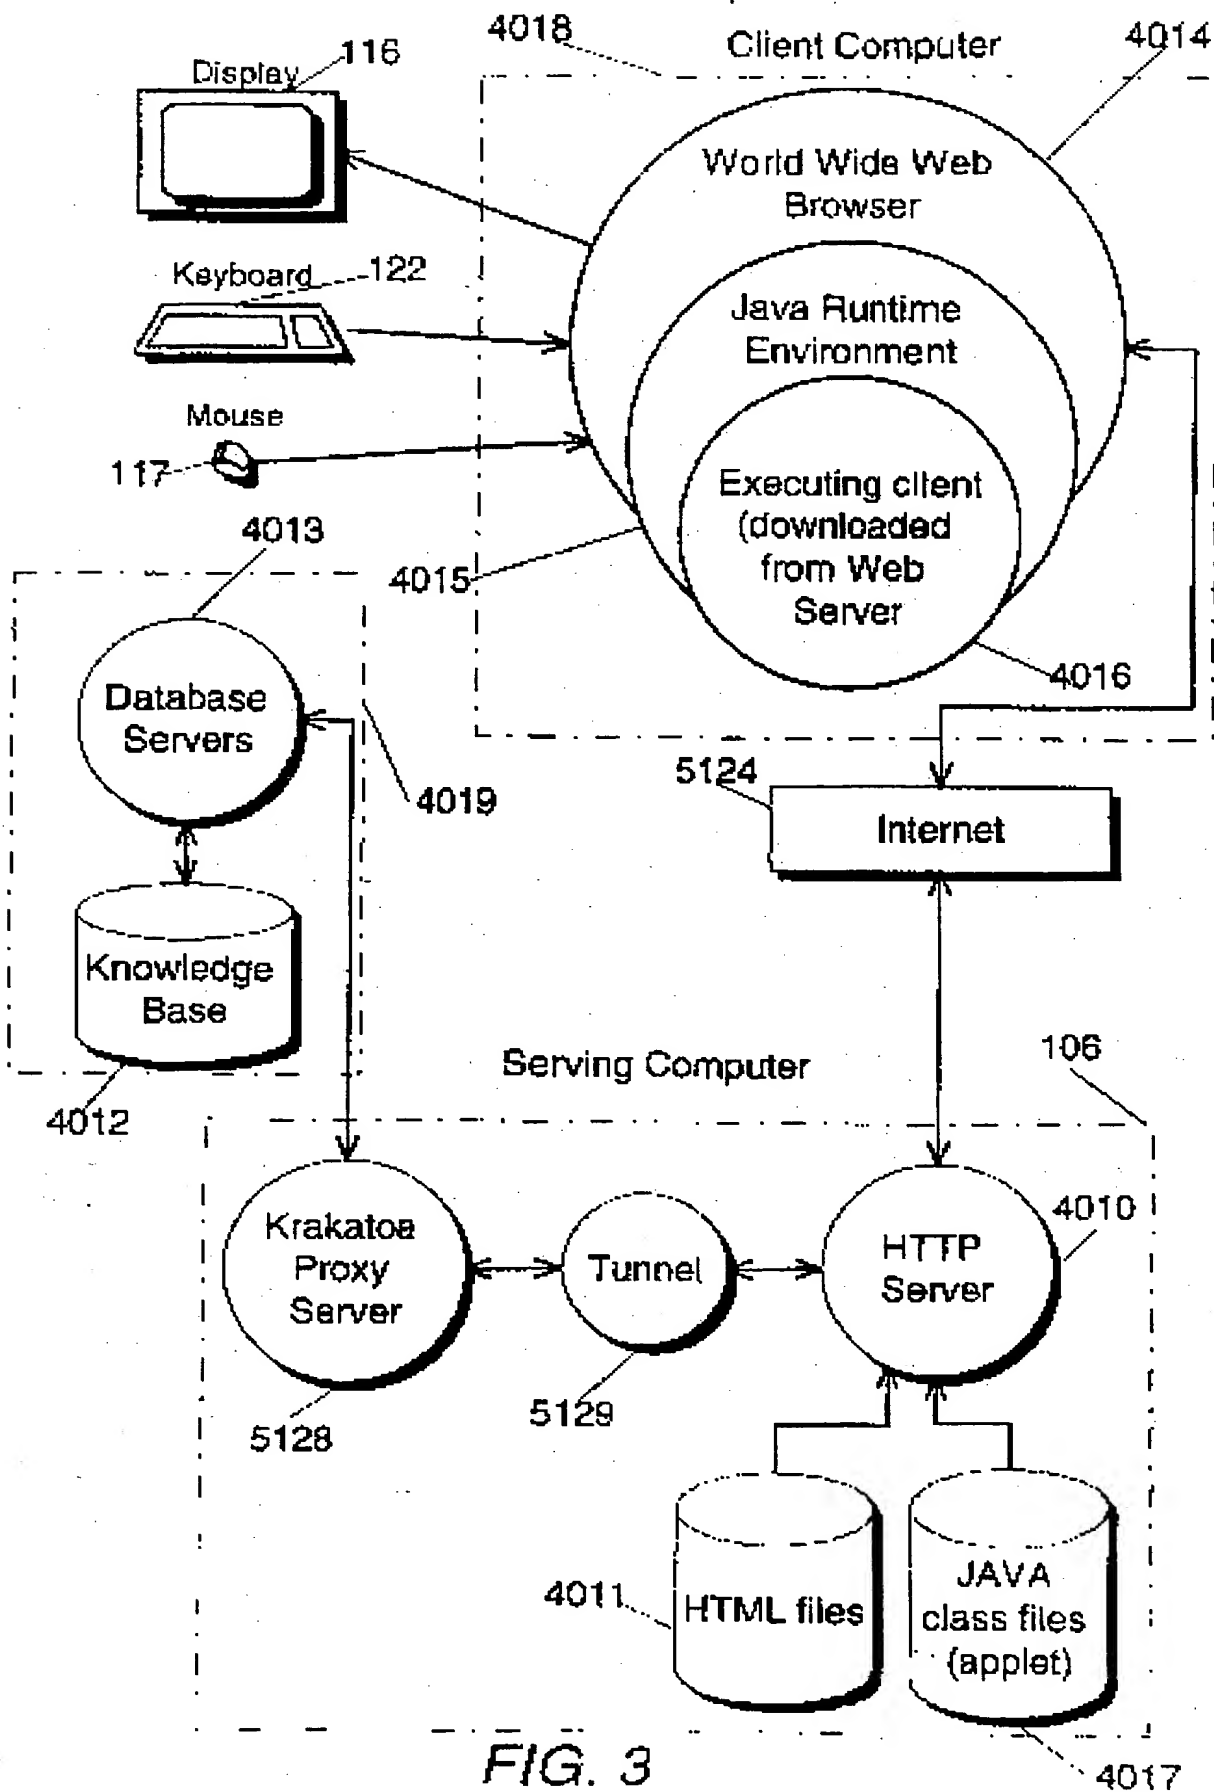


FIG. 3

4/64

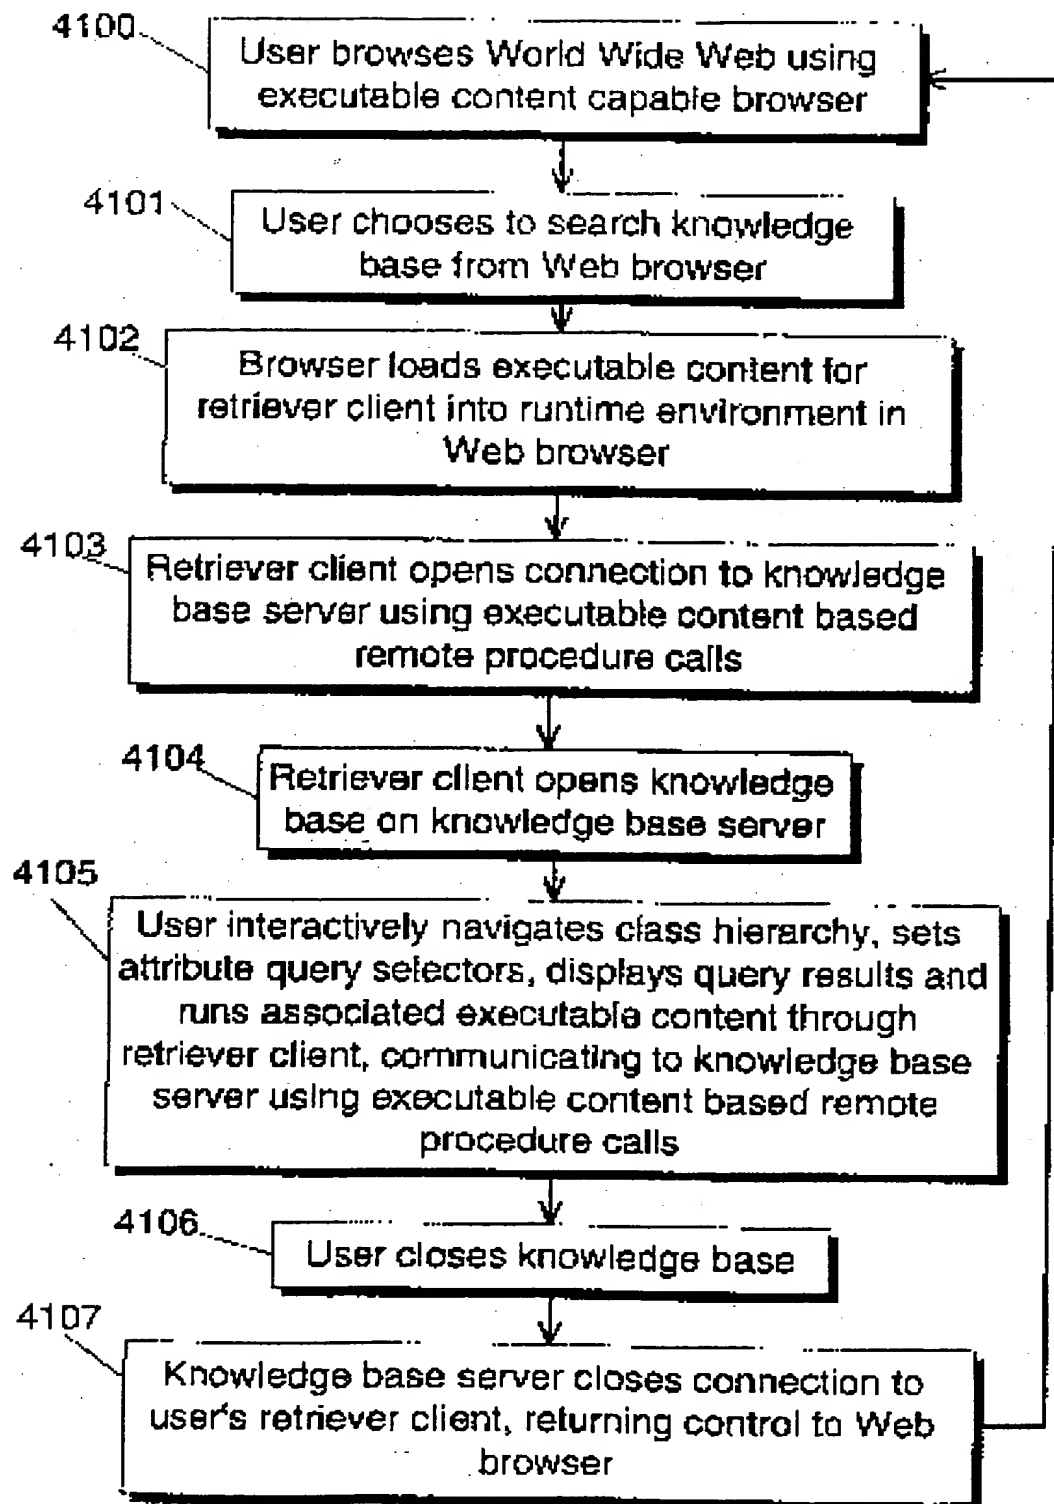


FIG. 4

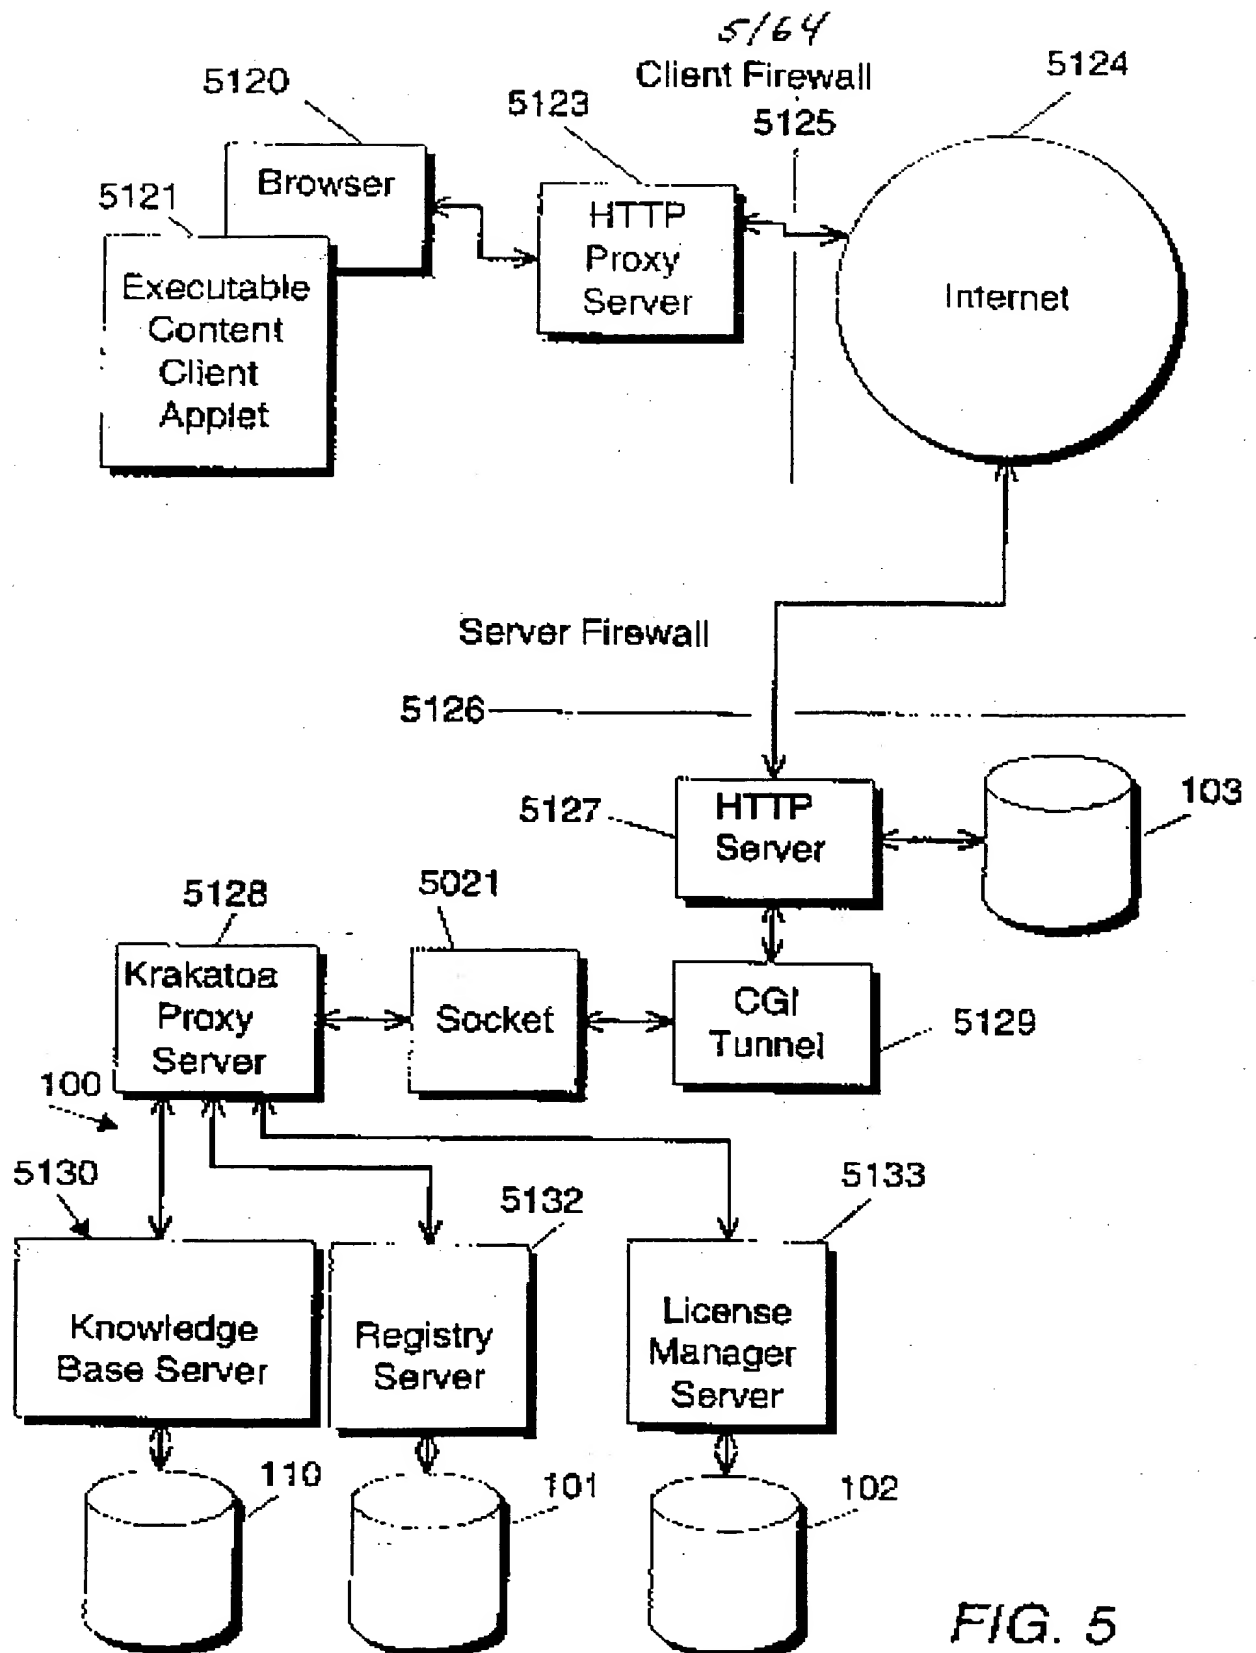


FIG. 5

6/64

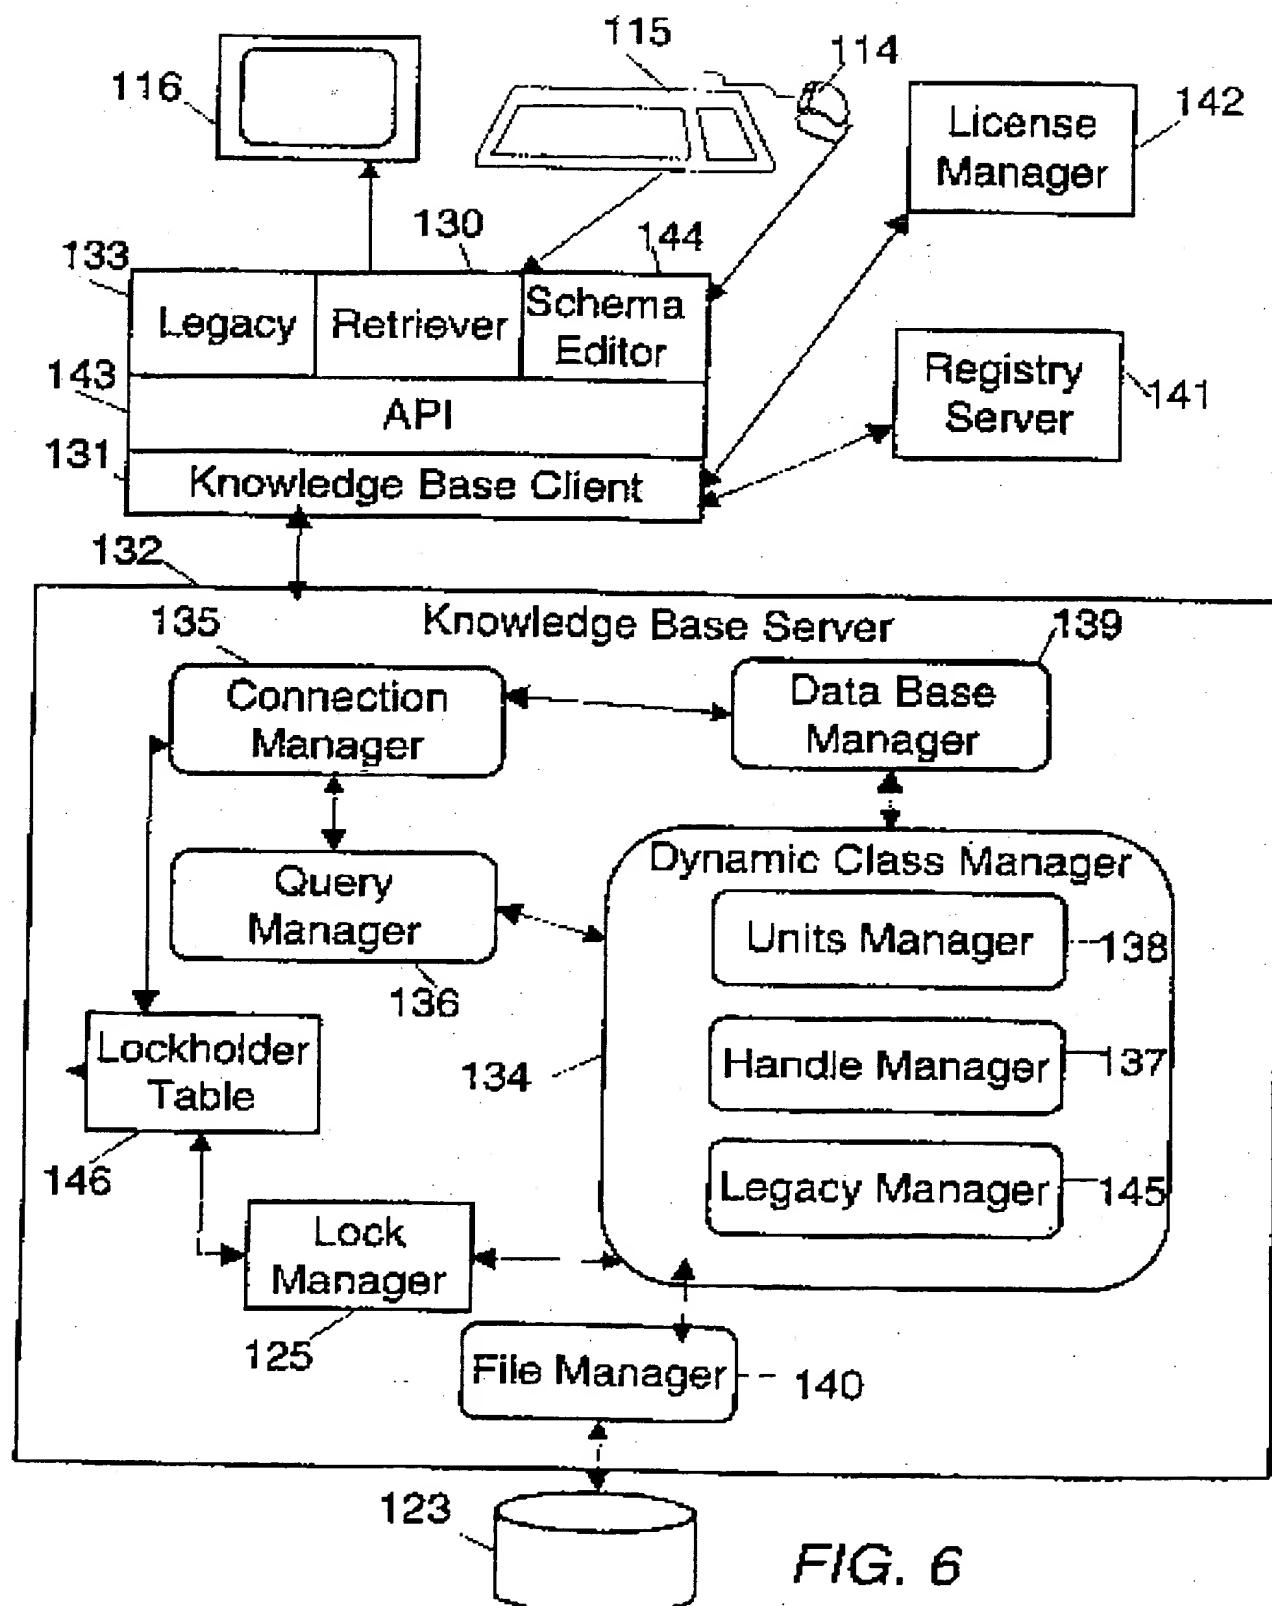


FIG. 6

7/64

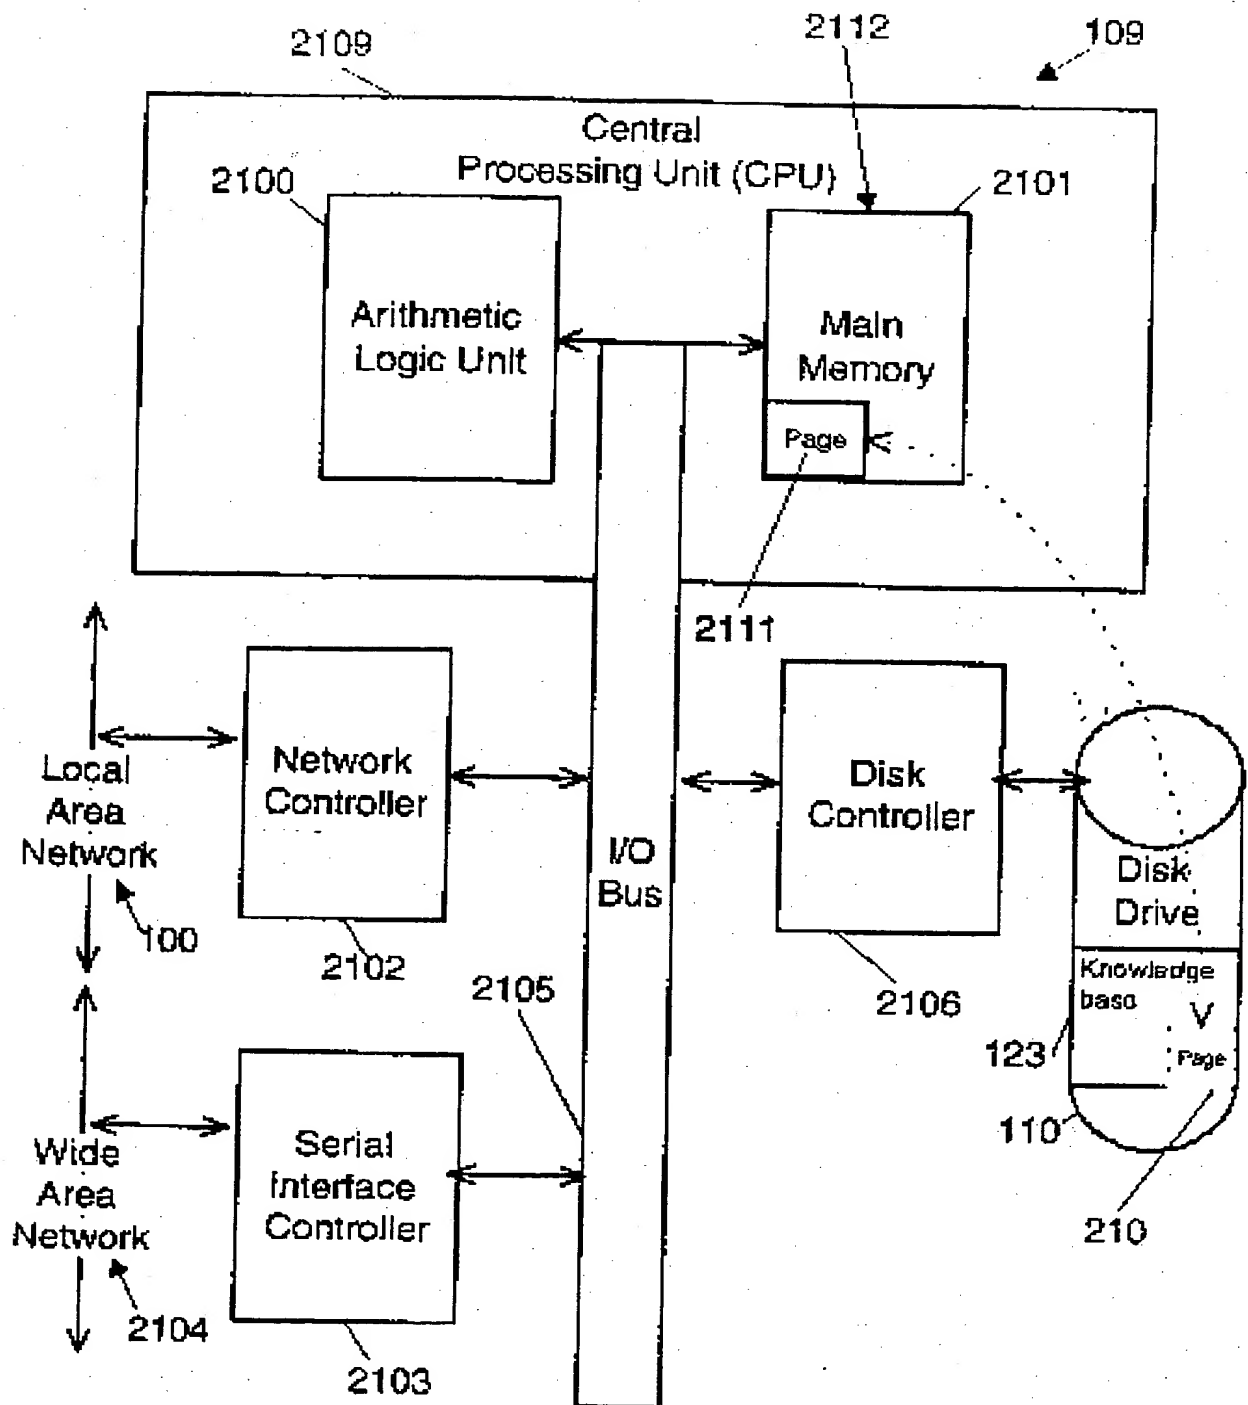


FIG. 7

8/64

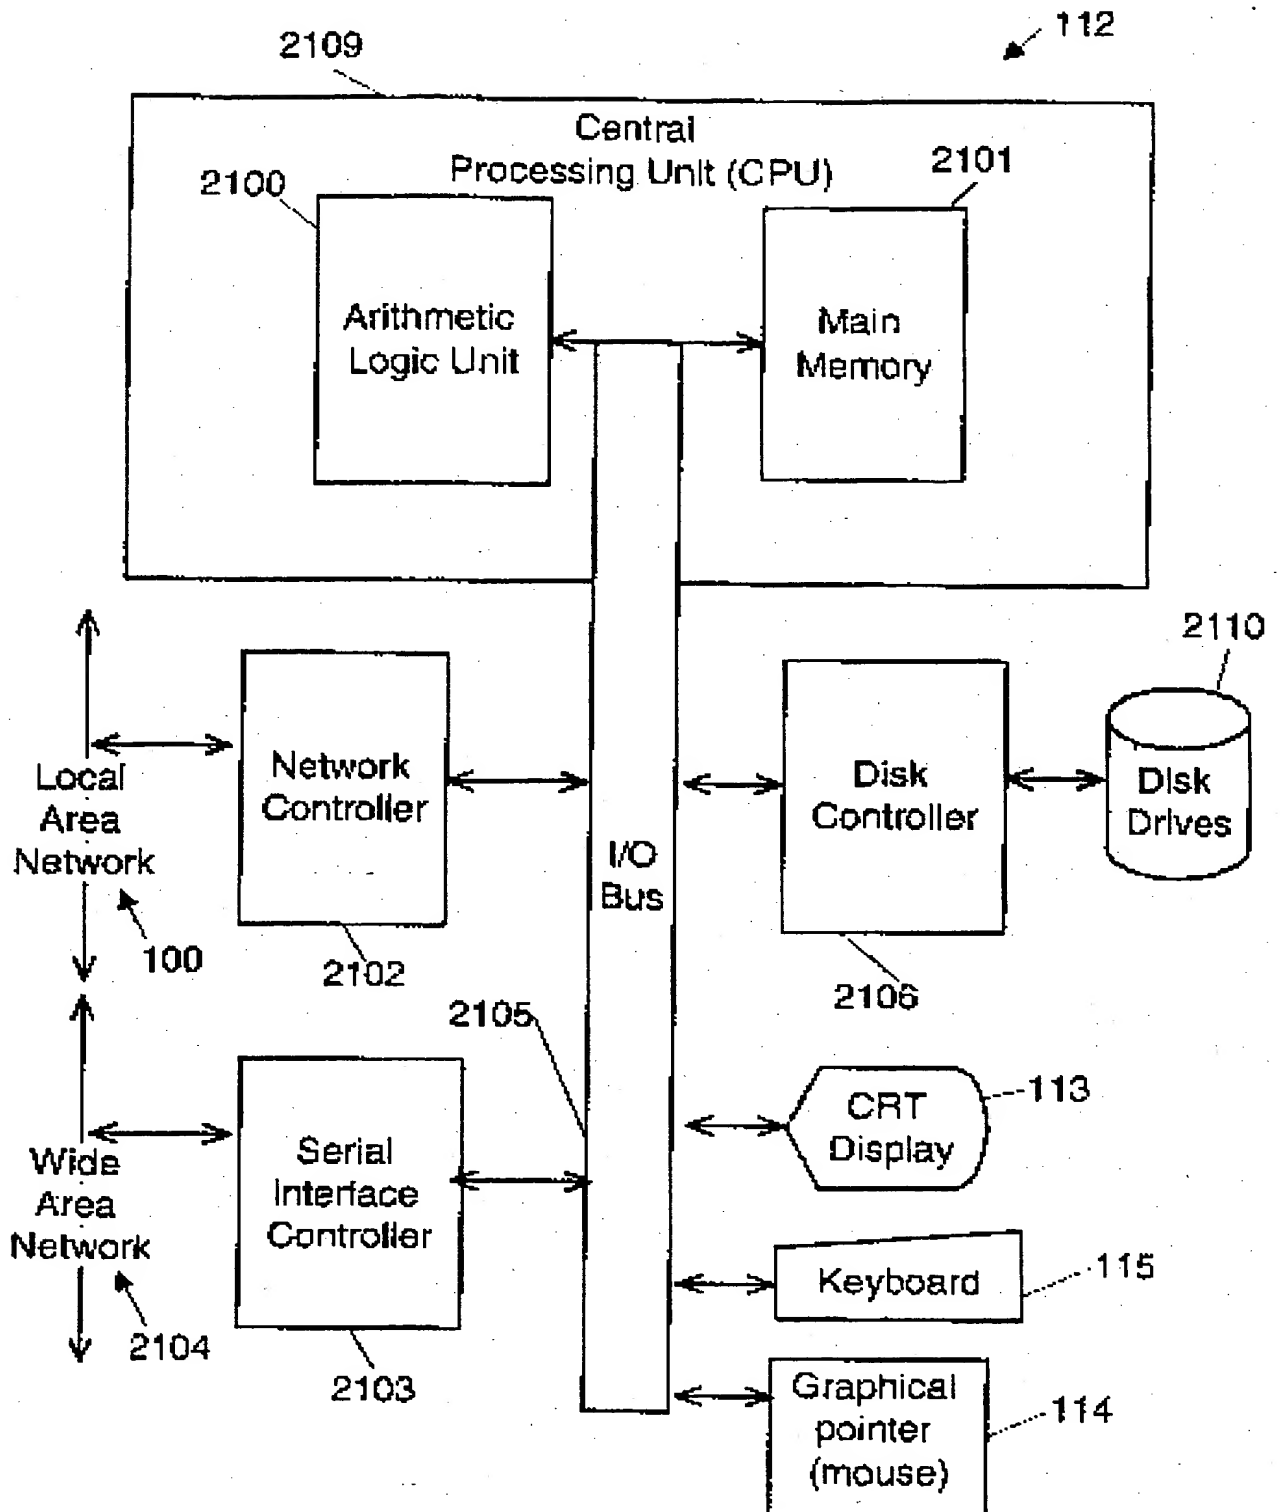


FIG. 8



9/64

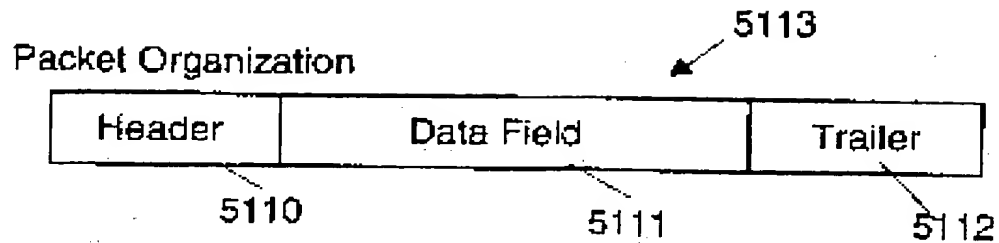


FIG. 9

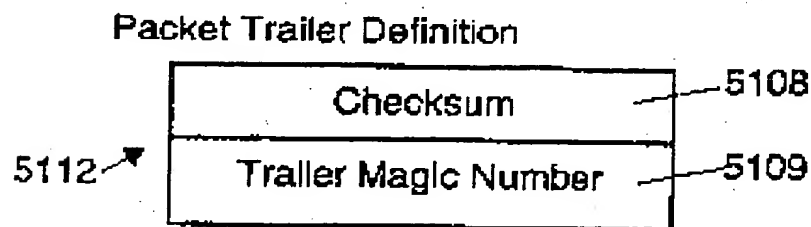


FIG. 10

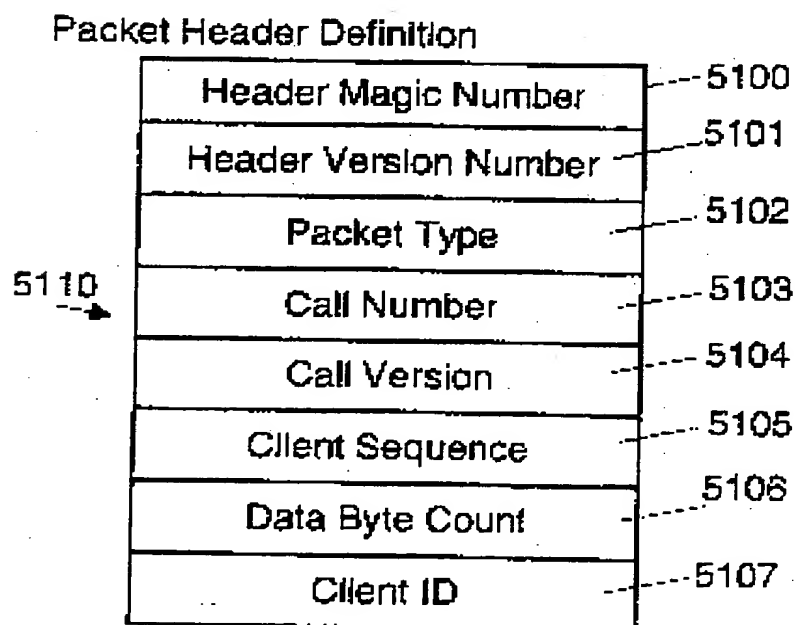


FIG. 11

10/64

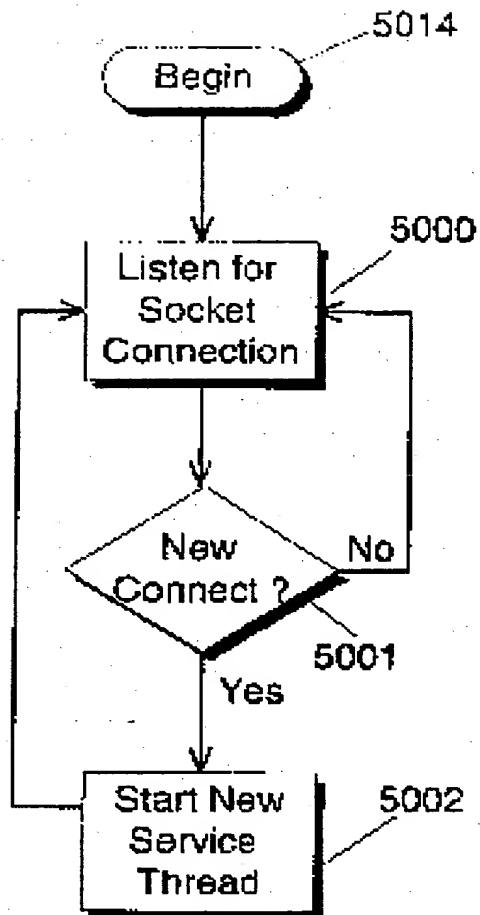


FIG. 12

11/64

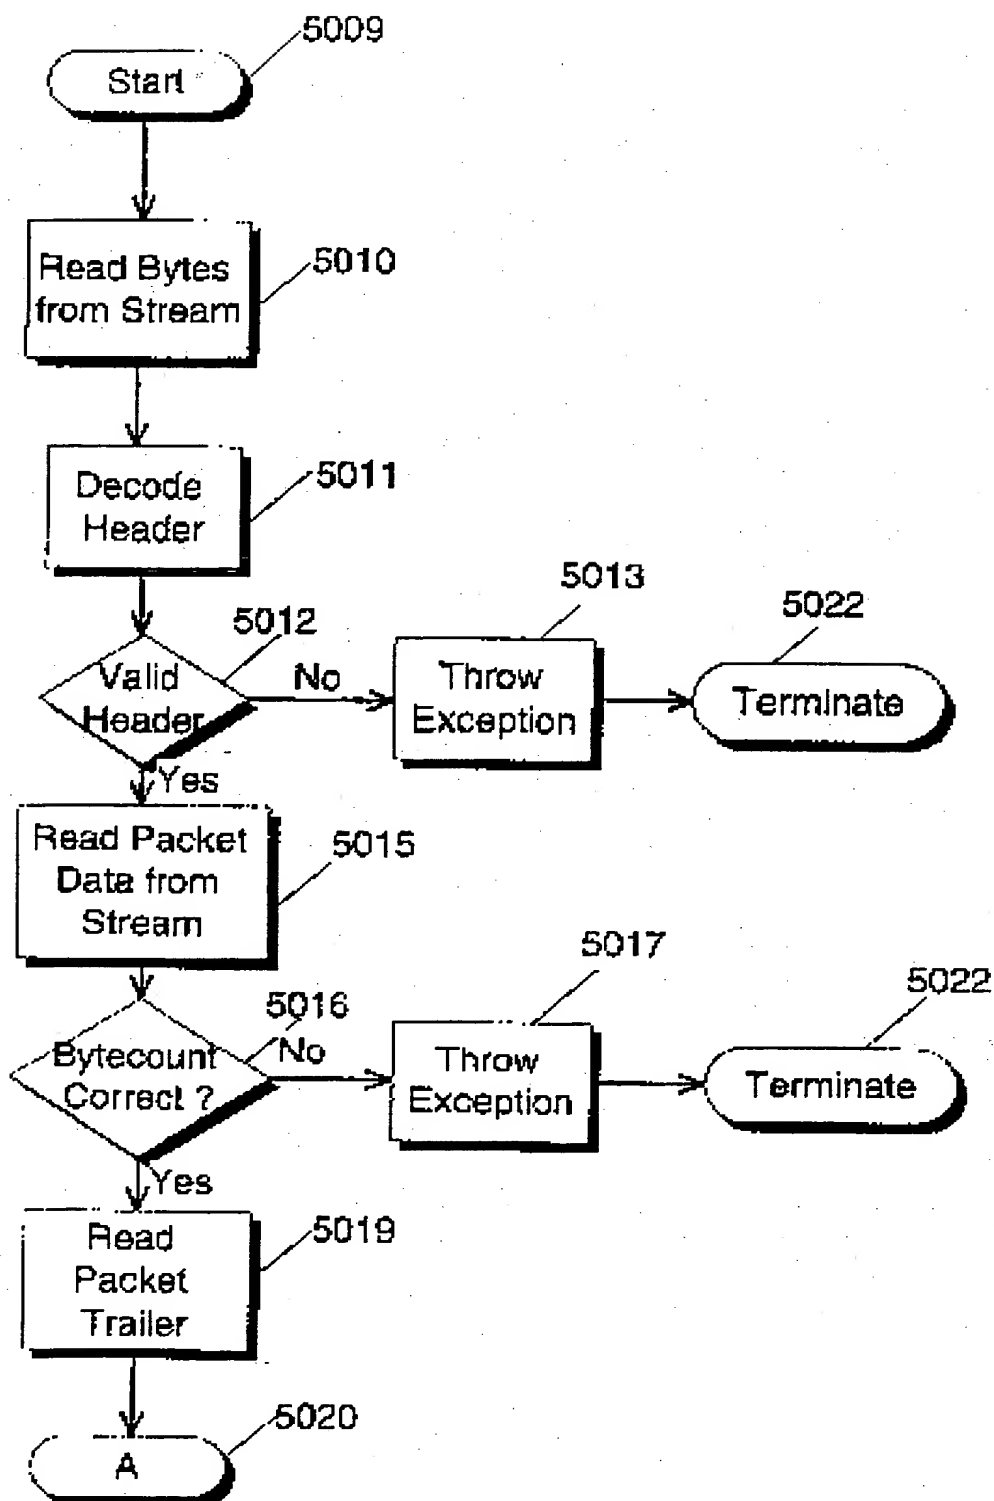


FIG. 13A

12/64

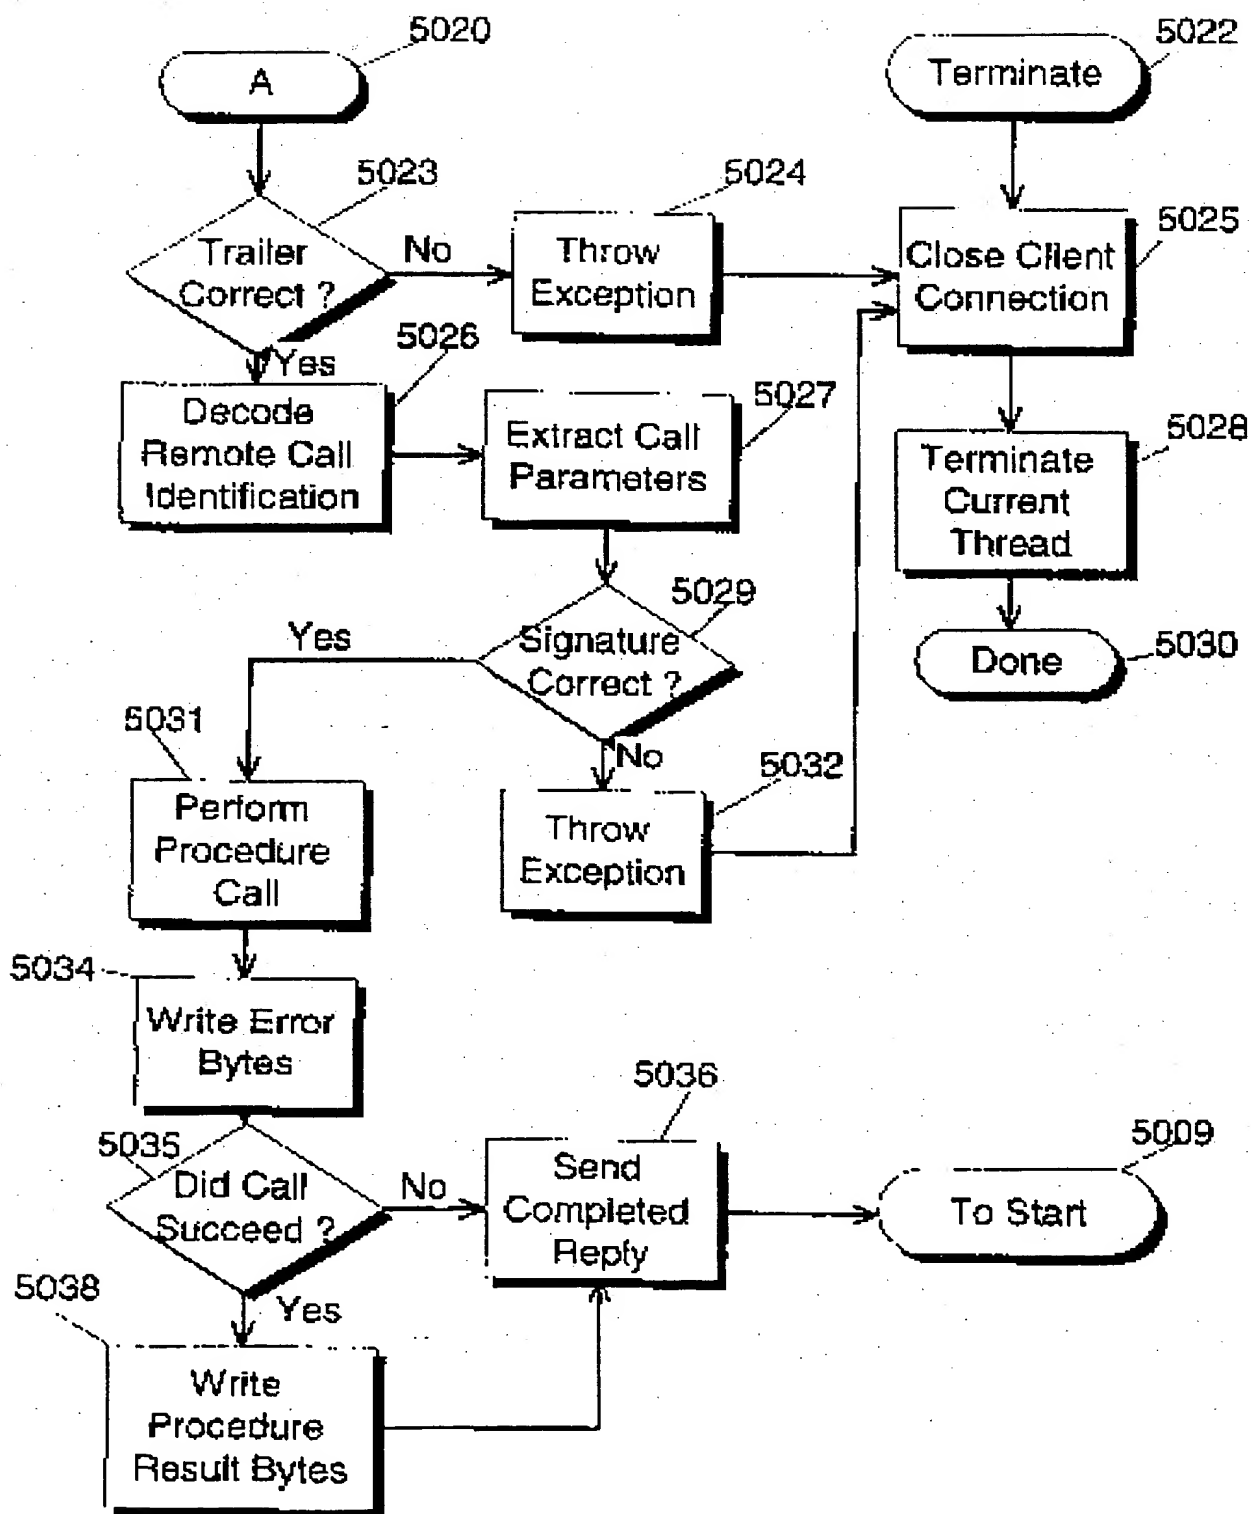


FIG. 13B

13/64

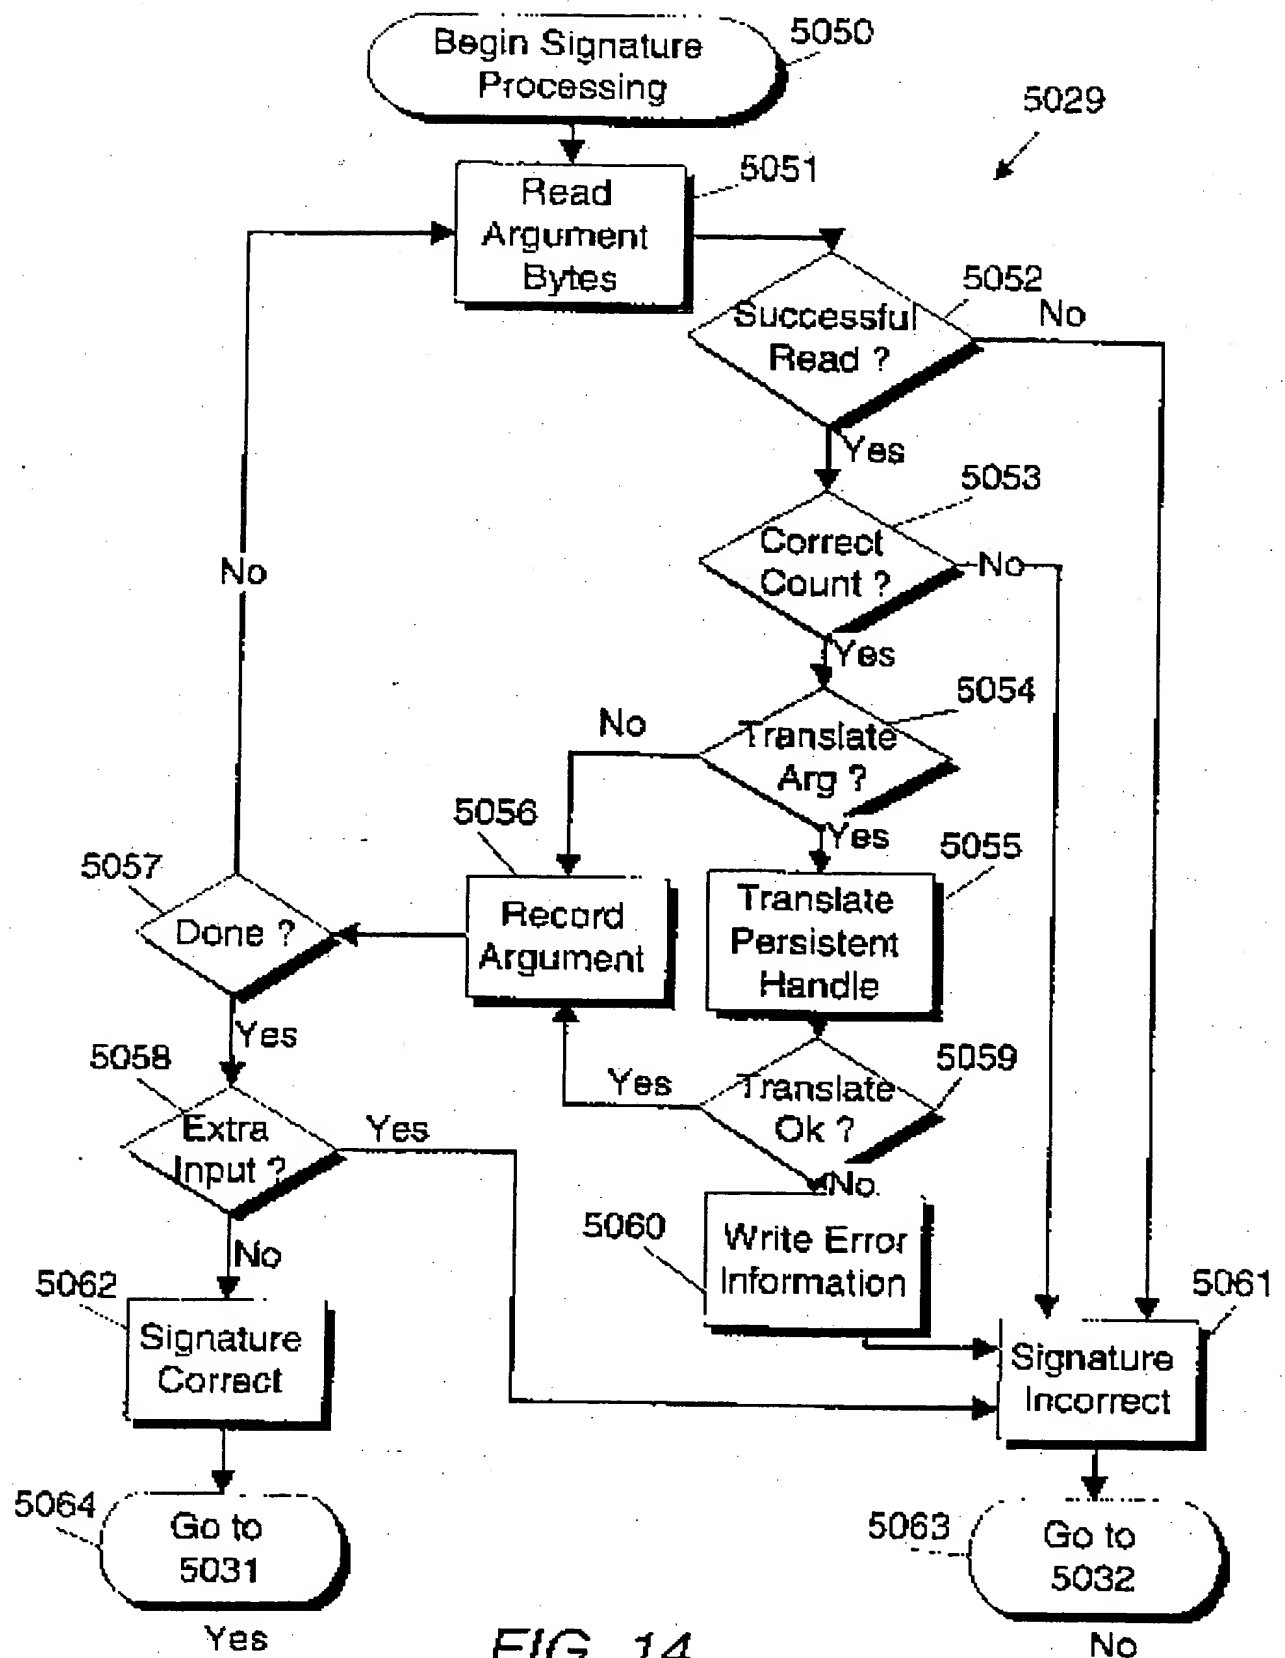


FIG. 14

14/64

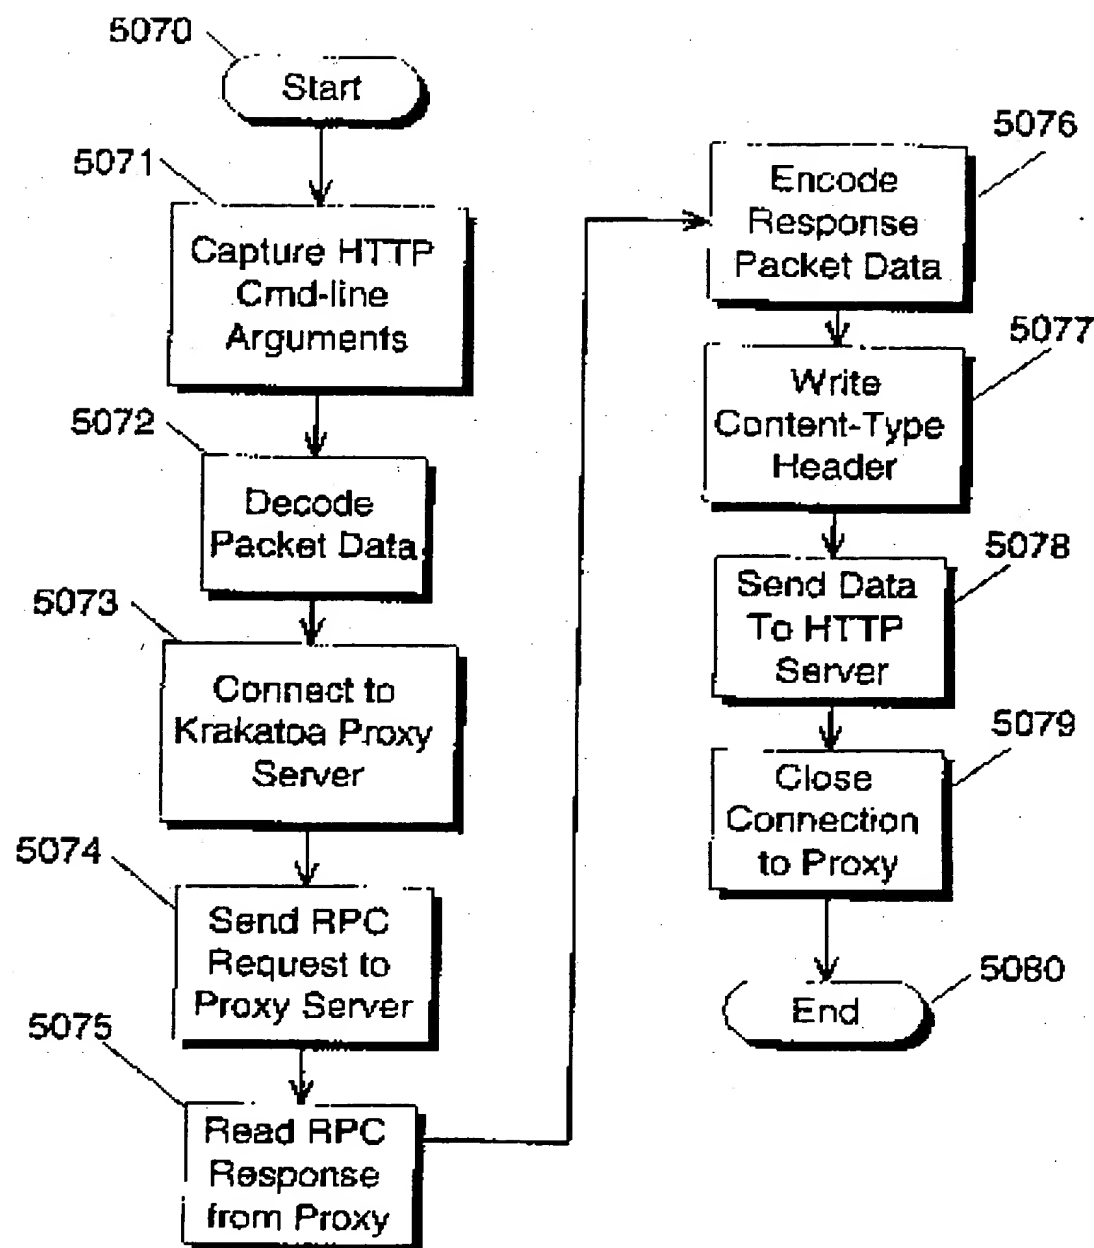


FIG. 15

15/64

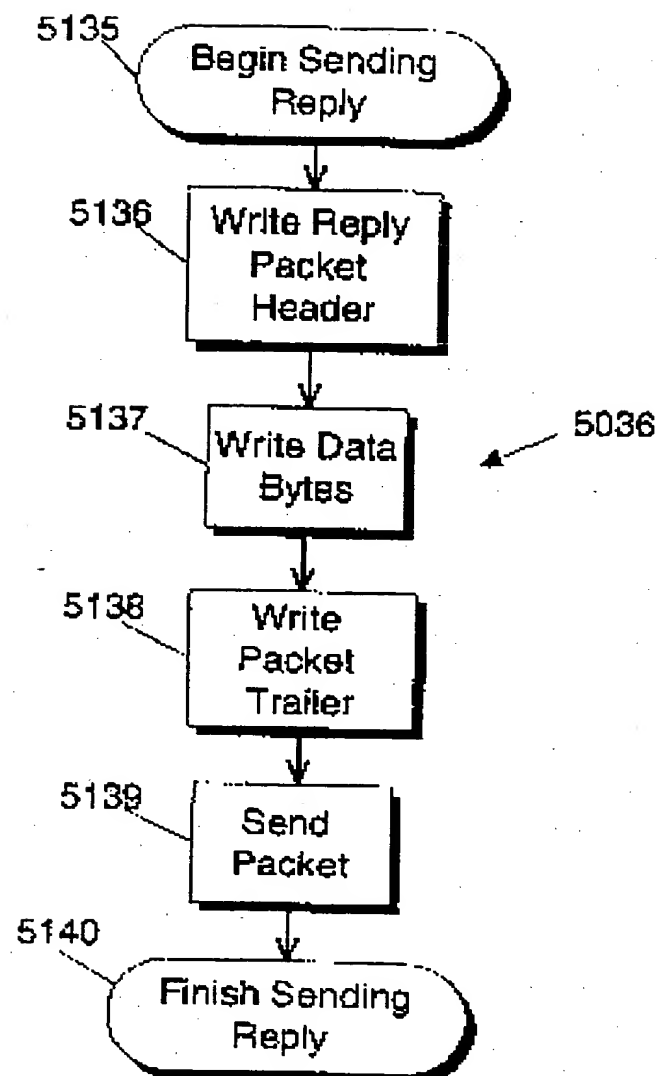


FIG. 16

16/64

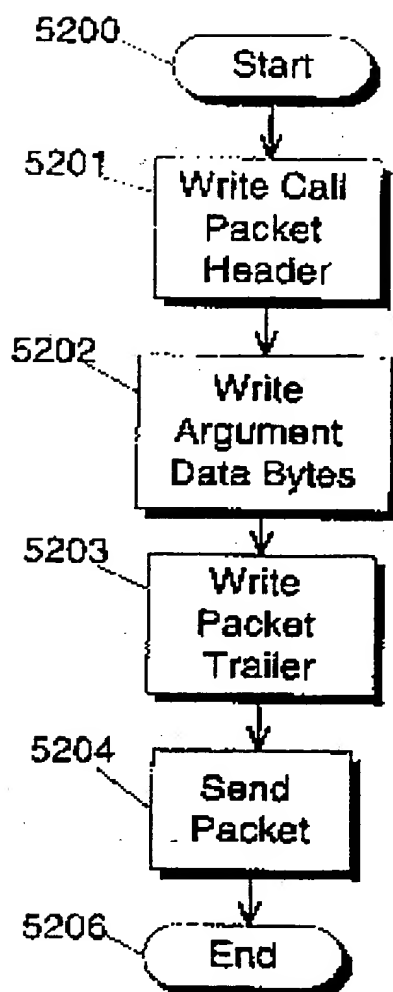


FIG. 17



17/64

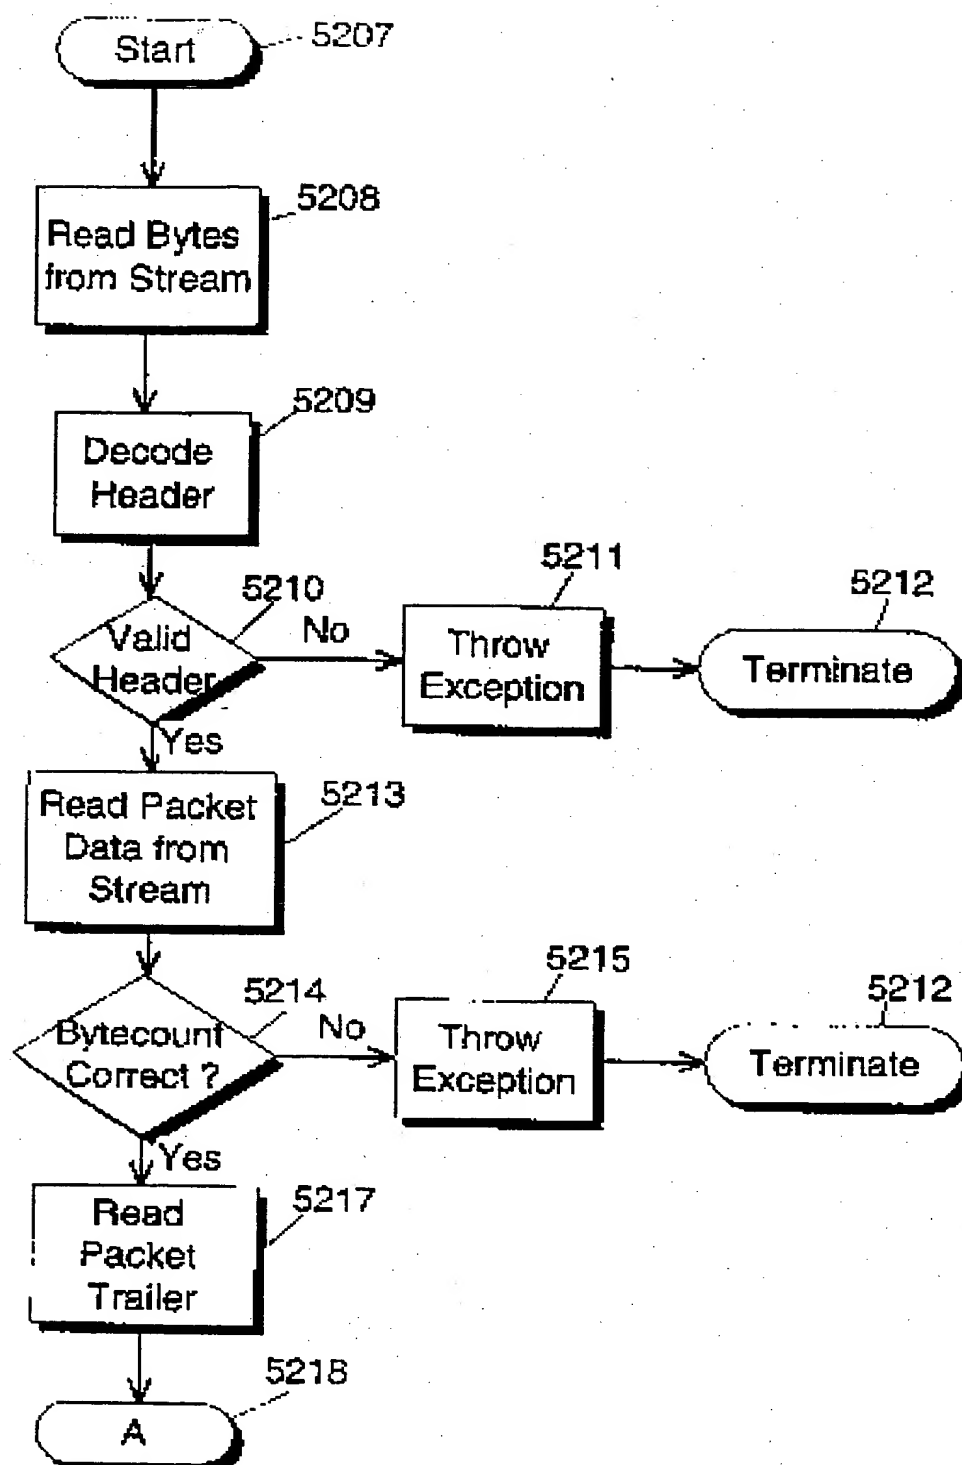


FIG. 18A

18/64

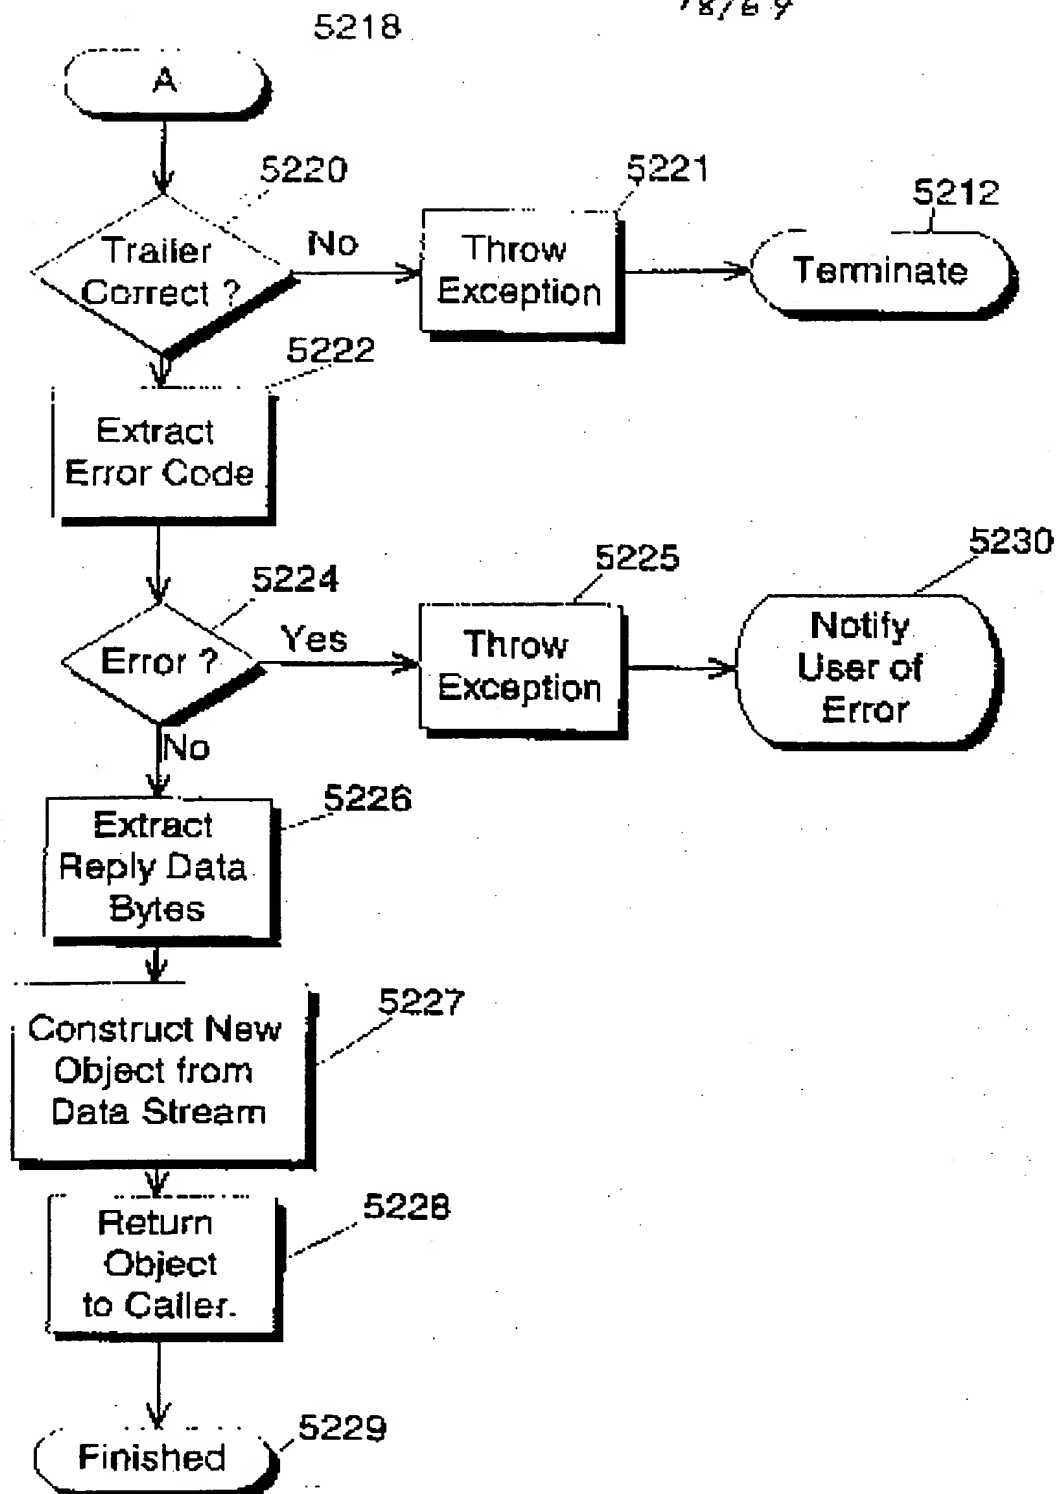


FIG. 18B

19/64

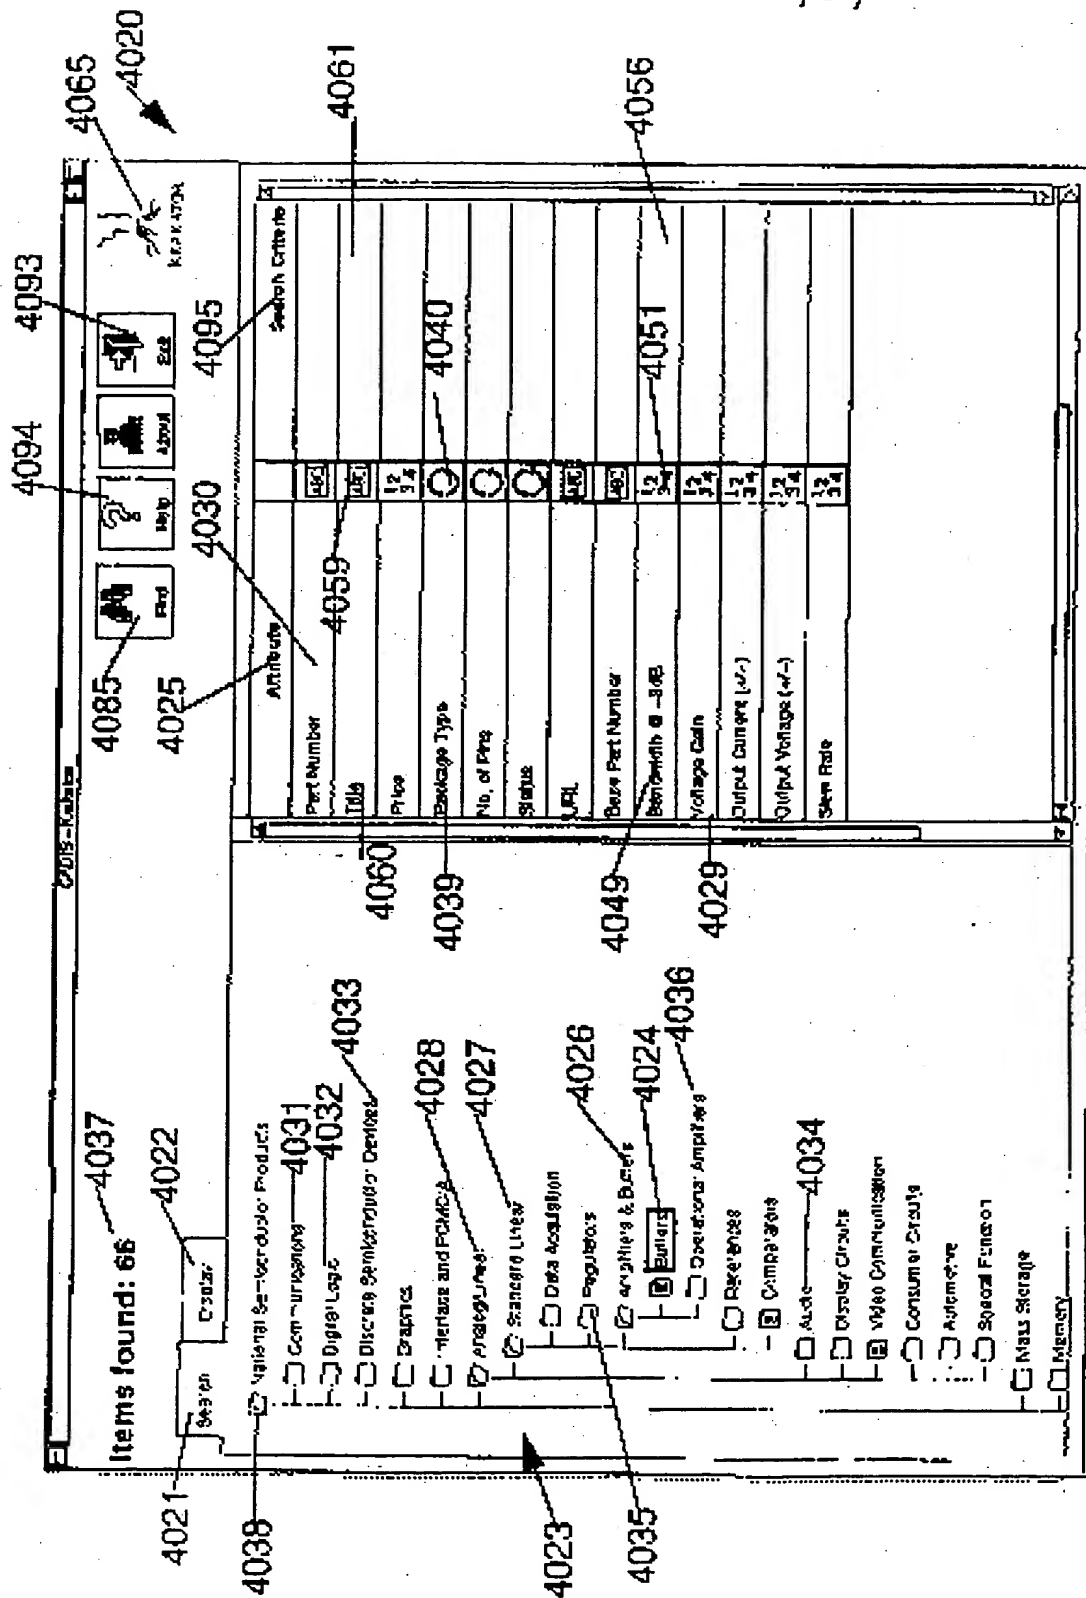


FIG. 19

20/64

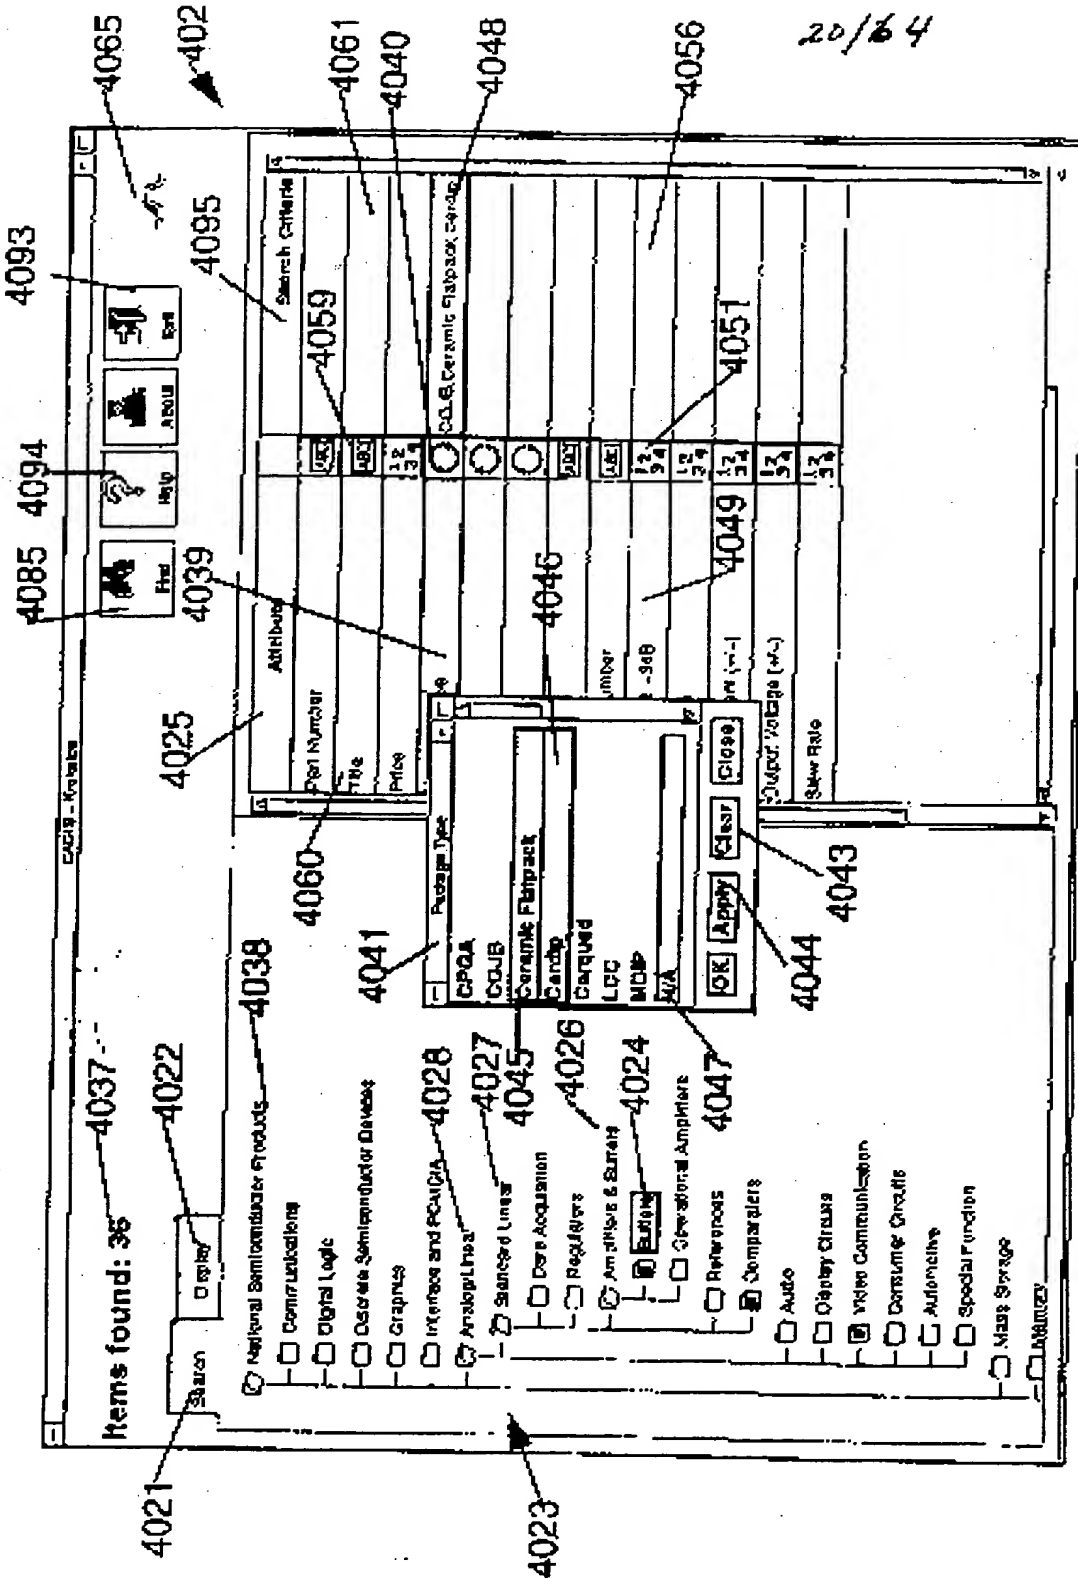


FIG. 20

21/64

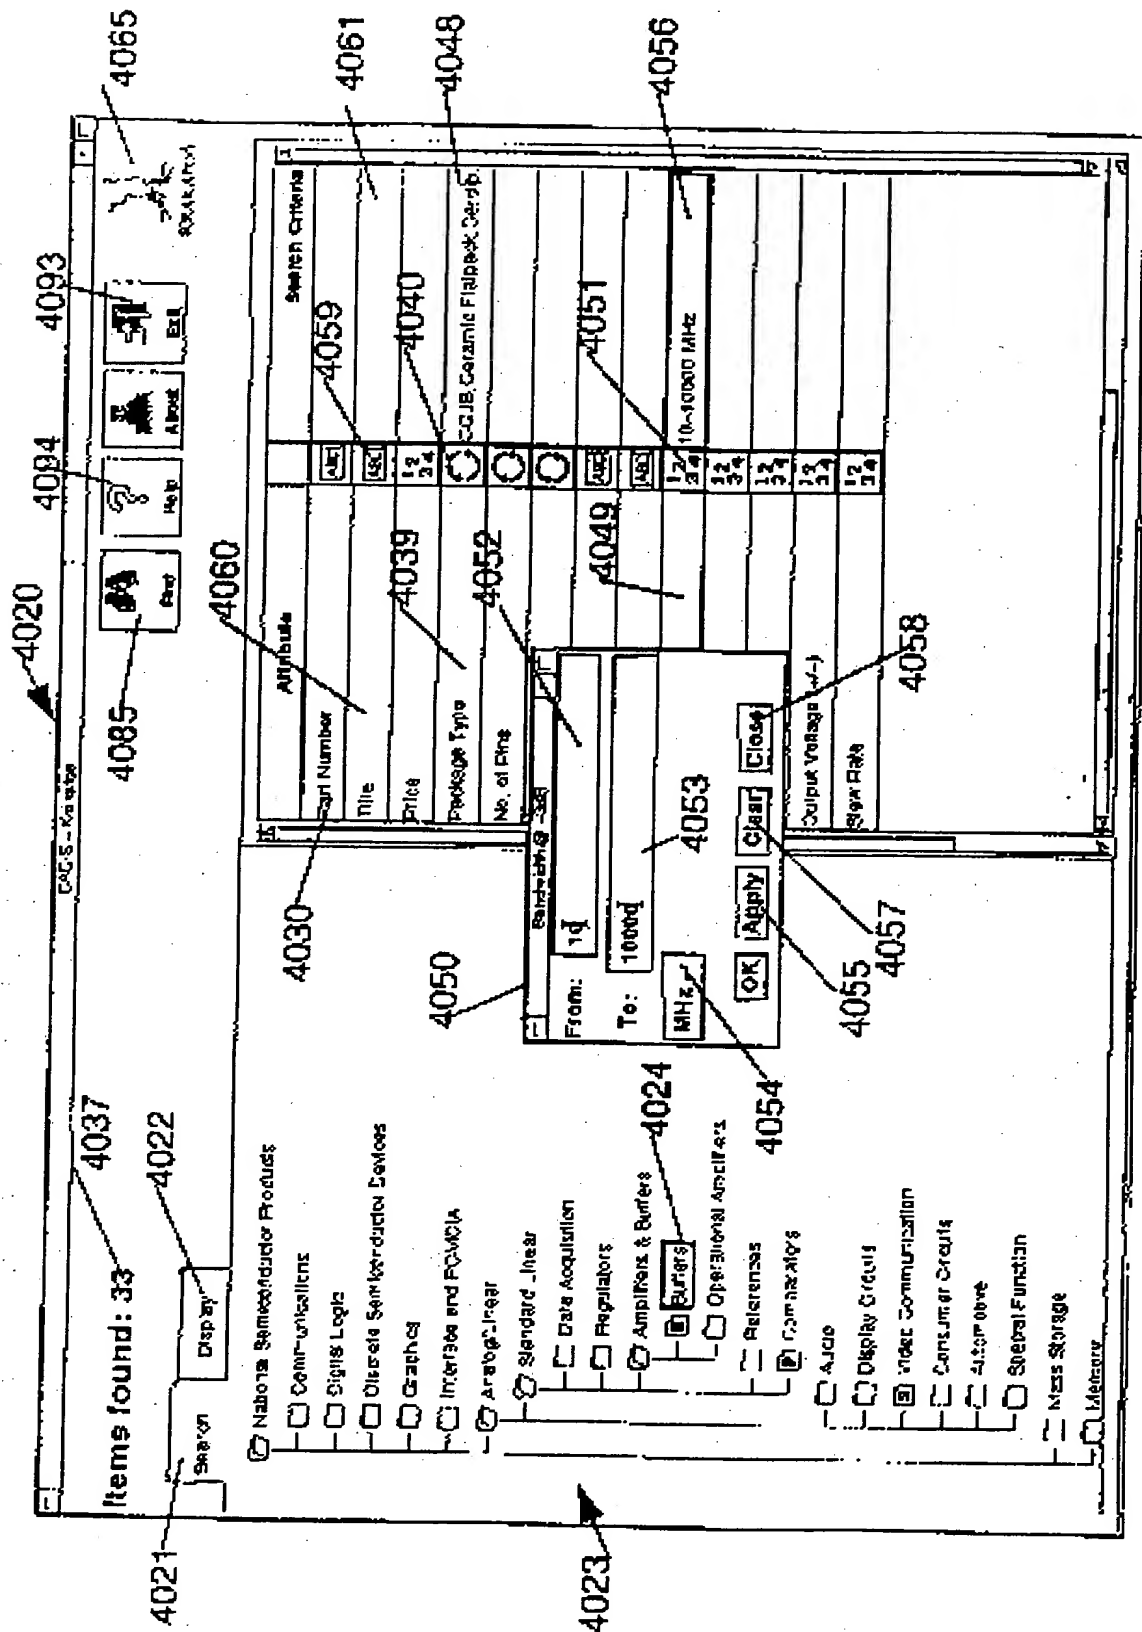


FIG. 21

22/64

4020

Items found: 13 4037

4021 Search Display 4022

4023

4030 National Semiconductor Products

4060 Communications

4039 Digital Logic

Discrete Semiconductor Devices

Graphics

Interface and PDMIA

Analogue/Linear

Standard Lines

Data Acquisition

Regulators

4024 Amplifiers & Buffers

4063 Operational Amplifiers

References

Converters

Audio

Display Circuits

Video Communication

Consumer Circuits

Automotive

Special Function

Mass Storage

Memory

4059

Attributes

Part Number

Price

Package Type

No. of Pins

Status

Search Criteria

4061

4048

4056

4085

Find

Help

Alert

4093

4094

4095

4049

4051

4064

4062

4063

4064

4065

4066

4067

4068

4069

4070

4071

4072

4073

4074

4075

4076

4077

4078

4079

4080

4081

4082

4083

4084

4085

4086

4087

4088

4089

4090

4091

4092

4093

4094

4095

4096

4097

4098

4099

4100

4101

4102

4103

4104

4105

4106

4107

4108

4109

4110

4111

4112

4113

4114

4115

4116

4117

4118

4119

4120

4121

4122

4123

4124

4125

4126

4127

4128

4129

4130

4131

4132

4133

4134

4135

4136

4137

4138

4139

4140

4141

4142

4143

4144

4145

4146

4147

4148

4149

4150

4151

4152

4153

4154

4155

4156

4157

4158

4159

4160

4161

4162

4163

4164

4165

4166

4167

4168

4169

4170

4171

4172

4173

4174

4175

4176

4177

4178

4179

4180

4181

4182

4183

4184

4185

4186

4187

4188

4189

4190

4191

4192

4193

4194

4195

4196

4197

4198

4199

4200

4201

4202

4203

4204

4205

4206

4207

4208

4209

4210

4211

4212

4213

4214

4215

4216

4217

4218

4219

4220

4221

4222

4223

4224

4225

4226

4227

4228

4229

4230

4231

4232

4233

4234

4235

4236

4237

4238

4239

4240

4241

4242

4243

4244

4245

4246

4247

4248

4249

4250

4251

4252

4253

4254

4255

4256

4257

4258

4259

4260

4261

4262

4263

4264

4265

4266

4267

4268

4269

4270

4271

4272

4273

4274

4275

4276

4277

4278

4279

4280

4281

4282

4283

4284

4285

4286

4287

4288

4289

4290

4291

4292

4293

4294

4295

4296

4297

4298

4299

4300

4301

4302

4303

4304

4305

4306

4307

4308

4309

4310

4311

4312

4313

4314

4315

4316

4317

4318

4319

4320

4321

4322

4323

4324

4325

4326

4327

4328

4329

4330

4331

4332

4333

4334

4335

4336

4337

4338

4339

4340

4341

4342

4343

4344

4345

4346

4347

4348

4349

4350

4351

4352

4353

4354

4355

4356

4357

4358

4359

4360

4361

4362

4363

4364

4365

4366

4367

4368

4369

4370

4371

4372

4373

4374

4375

4376

4377

4378

4379

4380

4381

4382

4383

4384

4385

4386

4387

4388

4389

4390

4391

4392

4393

4394

4395

4396

4397

4398

4399

4400

4401

4402

4403

4404

4405

4406

4407

4408

4409

4410

4411

4412

4413

4414

4415

4416

4417

4418

4419

4420

4421

4422

4423

4424

4425

4426

4427

4428

4429

4430

4431

4432

4433

4434

4435

4436

4437

4438

4439

4440

4441

4442

4443

4444

4445

4446

4447

4448

4449

4450

4451

4452

4453

4454

4455

4456

4457

4458

4459

4460

4461

4462

4463

4464

4465

4466

4467

4468

4469

4470

4471

4472

4473

4474

4475

4476

4477

4478

4479

4480

4481

4482

4483

4484

4485

4486

4487

4488

4489

4490

4491

4492

4493

4494

4495

4496

4497

4498

4499

4500

4501

4502

4503

4504

4505

4506

4507

4508

4509

4510

4511

4512

4513

4514

4515

4516

4517

4518

4519

4520

4521

4522

4523

4524

4525

4526

4527

4528

4529

4530

4531

4532

4533

4534

4535

4536

4537

4538

4539

4540

4541

4542

4543

4544

4545

4546

4547

4548

4549

4550

4551

4552

4553

4554

4555

4556

4557

4558

4559

4560

4561

4562

4563

4564

4565

4566

4567

4568

4569

4570

4571

4572

4573

4574

4575

4576

4577

4578

4579

4580

4581

4582

4583

4584

4585

4586

4587

4588

4589

4590

4591

4592

4593

4594

4595

4596

4597

4598

4599

4600

4601

4602

4603

4604

4605

4606

4607

4608

4609

4610

4611

4612

4613

4614

4615

4616

4617

4618

4619

4620

4621

4622

4623

4624

4625

4626

4627

4628

4629

4630

4631

4632

4633

4634

4635

4636

4637

4638

4639

4640

4641

4642

4643

4644

4645

4646

4647

4648

4649

4650

4651

4652

4653

4654

4655

4656

4657

4658

4659

4660

4661

4662

4663

4664

4665

4666

4667

4668

4669

4670

4671

4672

4673

4674

4675

4676

4677

4678

4679

4680

4681

4682

4683

4684

4685

4686

4687

4688

4689

4690

4691

4692

4693

4694

4695

4696

4697

4698

4699

4700

4701

4702

4703

4704

4705

4706

4707

4708

4709

4710

4711

4712

4713

4714

4715

4716

4717

4718

4719

4720

4721

4722

4723

4724

4725

4726

4727

4728

4729

4730

4731

4732

4733

4734

4735

4736

4737

4738

4739

4740

4741

4742

4743

4744

4745

4746

4747

4748

4749

4750

4751

4752

4753

4754

4755

4756

4757

4758

4759

4760

4761

4762

4763

4764

4765

4766

4767

4768

4769

4770

4771

4772

4773

4774

4775

4776

4777

4778

4779

4780

4781

4782

4783

4784

4785

4786

4787

4788

4789

4790

4791

4792

4793

4794

4795

4796

4797

4798

4799

4800

4801

4802

4803

4804

4805

4806

4807

4808

4809

4810

4811

4812

4813

4814

4815

4816

4817

4818

4819

4820

4821

4822

4823

4824

4825

4826

4827

4828

4829

4830

4831

4832

4833

4834

4835

4836

4837

4838

4839

4840

4841

4842

4843

4844

4845

4846

4847

4848

4849

4850

4851

4852

4853

4854

4855

4856

4857

4858

4859

4860

4861

4862

4863

4864

4865

4866

4867

4868

4869

4870

4871

4872

4873

4874

4875

4876

4877

4878

4879

4880

4881

4882

4883

4884

4885

4886

4887

4888

4889

4890

4891

4892

4893

4894

4895

4896

4897

4898

4899

4900

4901

4902

4903

4904

4905

4906

4907

4908

4909

4910

4911

4912

4913

4914

4915

4916

4917

4918

4919

4920

4921

4922

4923

4924

4925

4926

4927

4928

4929

4930

4931

4932

4933

4934

4935

4936

4937

4938

4939

4940

4941

4942

4943

4944

4945

4946

4947

4948

4949

4950

4951

4952

4953

4954

4955

4956

4957

4958

4959

4960

4961

4962

4963

4964

4965

4966

4967

4968

4969

4970

4971

4972

4973

4974

4975

4976

4977

4978

4979

4980

4981

4982

4983

4984

4985

4986

4987

4988

4989

4990

4991

4992

4993

4994

4995

4996

4997

4998

4999

5000

5001

5002

5003

5004

5005

5006

5007

5008

5009

5010

5011

5012

5013

5014

5015

5016

5017

5018

5019

5020

5021

5022

5023

5024

5025

5026

5027

5028

5029

5030

5031

5032

5033

5034

5035

5036

5037

5038

5039

5040

5041

5042

5043

5044

5045

5046

5047

5048

5049

5050

5051

5052

5053

5054

5055

5056

5057

5058

5059

5060

5061

5062

5063

5064

5065

5066

5067

5068

5069

5070

5071

5072

5073

5074

5075

5076

5077

5078

5079

5080

5081

5082

5083

5084

5085

5086

5087

5088

5089

5090

5091

5092

5093

5094

5095

5096

5097

5098

5099

5100

5101

5102

5103

5104

5105

5106

5107

5108

5109

5110

5111

5112

5113

5114

5115

5116

5117

5118

5119

5120

5121

5122

5123

5124

5125

5126

5127

5128

5129

5130

5131

5132

5133

5134

5135

5136

5137

5138

5139

5140

5141

5142

5143

5144

5145

5146

5147

5148

5149

5150

5151

5152

5153

5154

5155

5156

5157

5158

5159

5160

5161

5162

5163

5164

5165

5166

5167

5168

5169

5170

5171

5172

5173

5174

5175

5176

5177

5178

5179

5180

5181

5182

5183

5184

5185

5186

5187

5188

5189

5190

5191

5192

5193

5194

5195

5196

5197

5198

5199

5200

5201

5202

5203

5204

5205

5206

5207

5208

5209

5210

5211

5212

5213

5214

5215

5216

5217

5218

5219

5220

5221

5222

5223

5224

5225

5226

5227

5228

5229

5230

5231

5232

5233

5234

5235

5236

5237

5238

5239

23/64

4093

Items found: 13

4037

4021

4067

4066

4067

4020

4067

SAWS - Kuba

4074

4069

4022

4068

4065

4071

4094

4075

4073

4070

Search

Display

Sort

Hot Links

Help

Print

Exit

Part Number	Title	Price	Package Type
LM105F-MLS	Voltage Regulator		Ceramic Flatpack
LM110F-MLS	Voltage Follower		Ceramic Flatpack
LM124AF-MLS	Low Power Quad Operational Amplifier		Ceramic Flatpack
LM108AF-MLS	Operational Amplifiers		Ceramic Flatpack
LF158AF-MCP	LF155/LF157 Series Monolithic JFET Input Operational Amplifier		Ceramic Flatpack
LM211F-MIL	Dual Voltage Comparator		Ceramic Flatpack
LM211F/089	Dual Voltage Comparator	08	Ceramic Flatpack
LM111F-MLS	Voltage Comparator		Ceramic Flatpack
LM199AF-MCP	Low Power Low Offset Voltage Quad Comparator		Ceramic Flatpack
LM139F-MLS	Low Power Low Offset Voltage Quad Comparator		Ceramic Flatpack
LM155AF-MLS	Low Power Low Offset Voltage Quad Comparator		Ceramic Flatpack
LM151F/083	High Speed Differential Comparator		Ceramic Flatpack
LM101F-MLS	High Speed Differential Comparator		Ceramic Flatpack

**FIG. 23**

24/64

4076

Item Information

National Semiconductor Products

4084

Analog/Linear

Standard Linear

Comparators

4077

Attribute Name	Attribute Title
Part Number	LM161F/883
Title	High Speed Differential Comparator
Price	\$0.52
Package Type	Ceramic Flatpack
No. of Pins	14
Status	Full production
URL	<a href="http://www.national.com/pda/M/LM161.html">http://www.national.com/pda/M/LM161.html</a>

4081

4080

4082

4079

4083

OK

FIG. 24



25/64

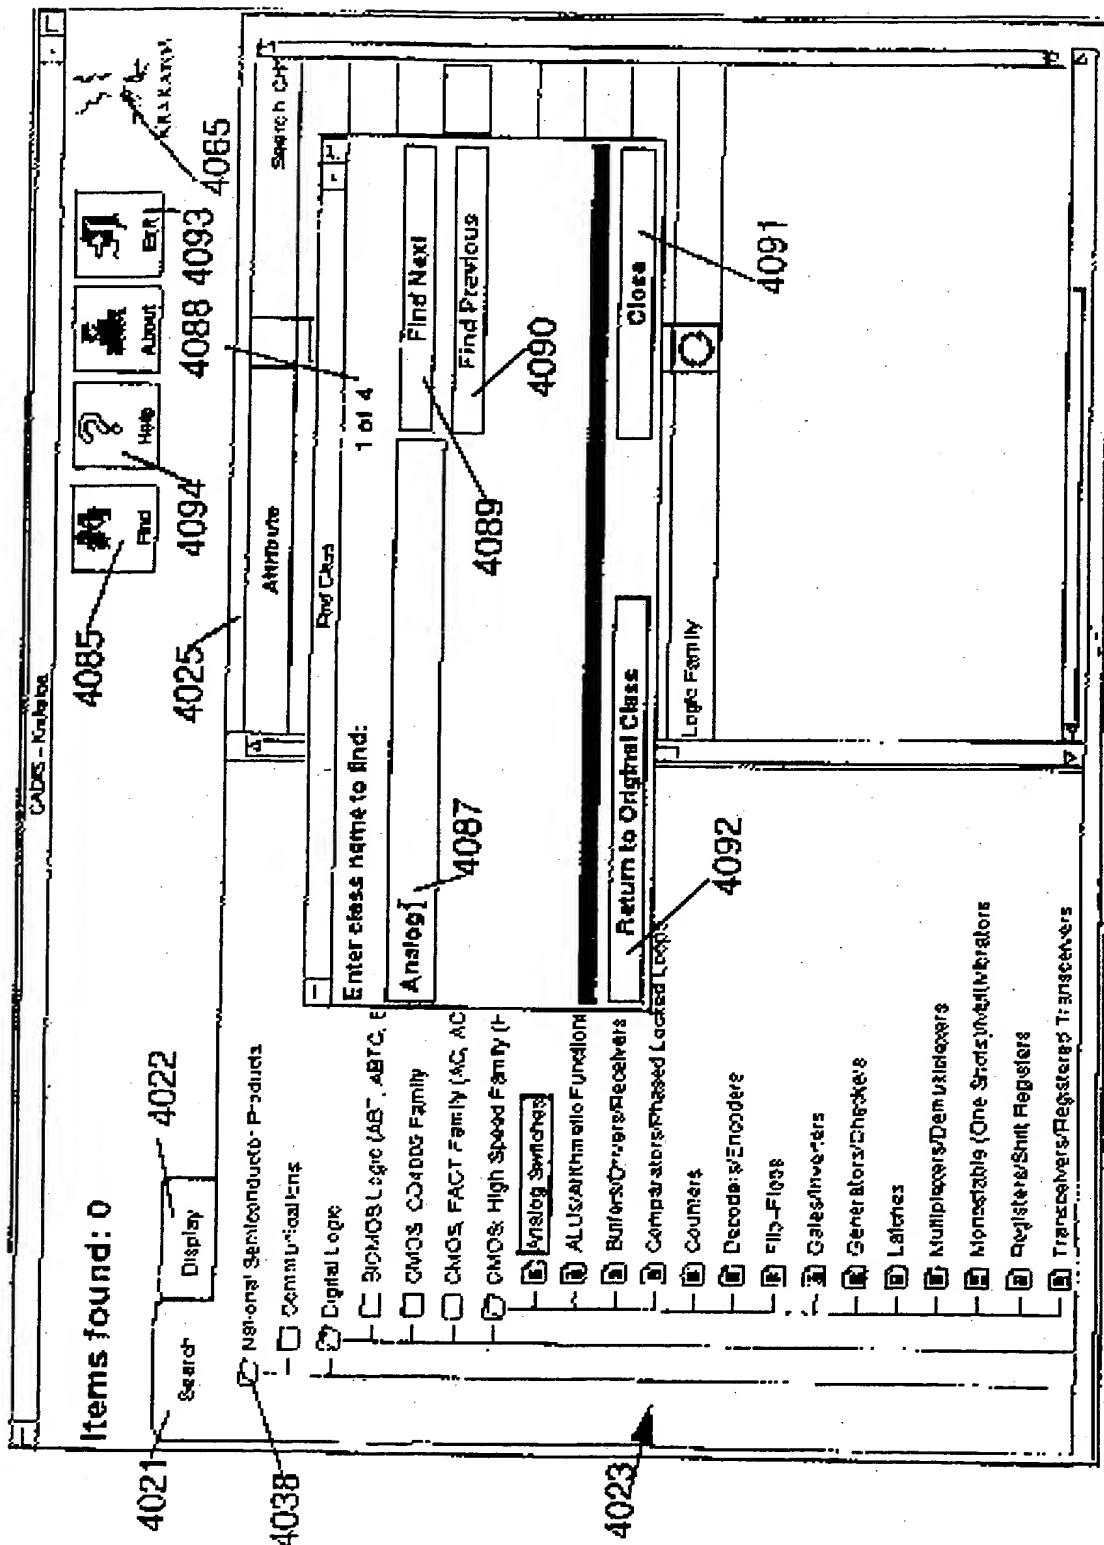


FIG. 25

26/64

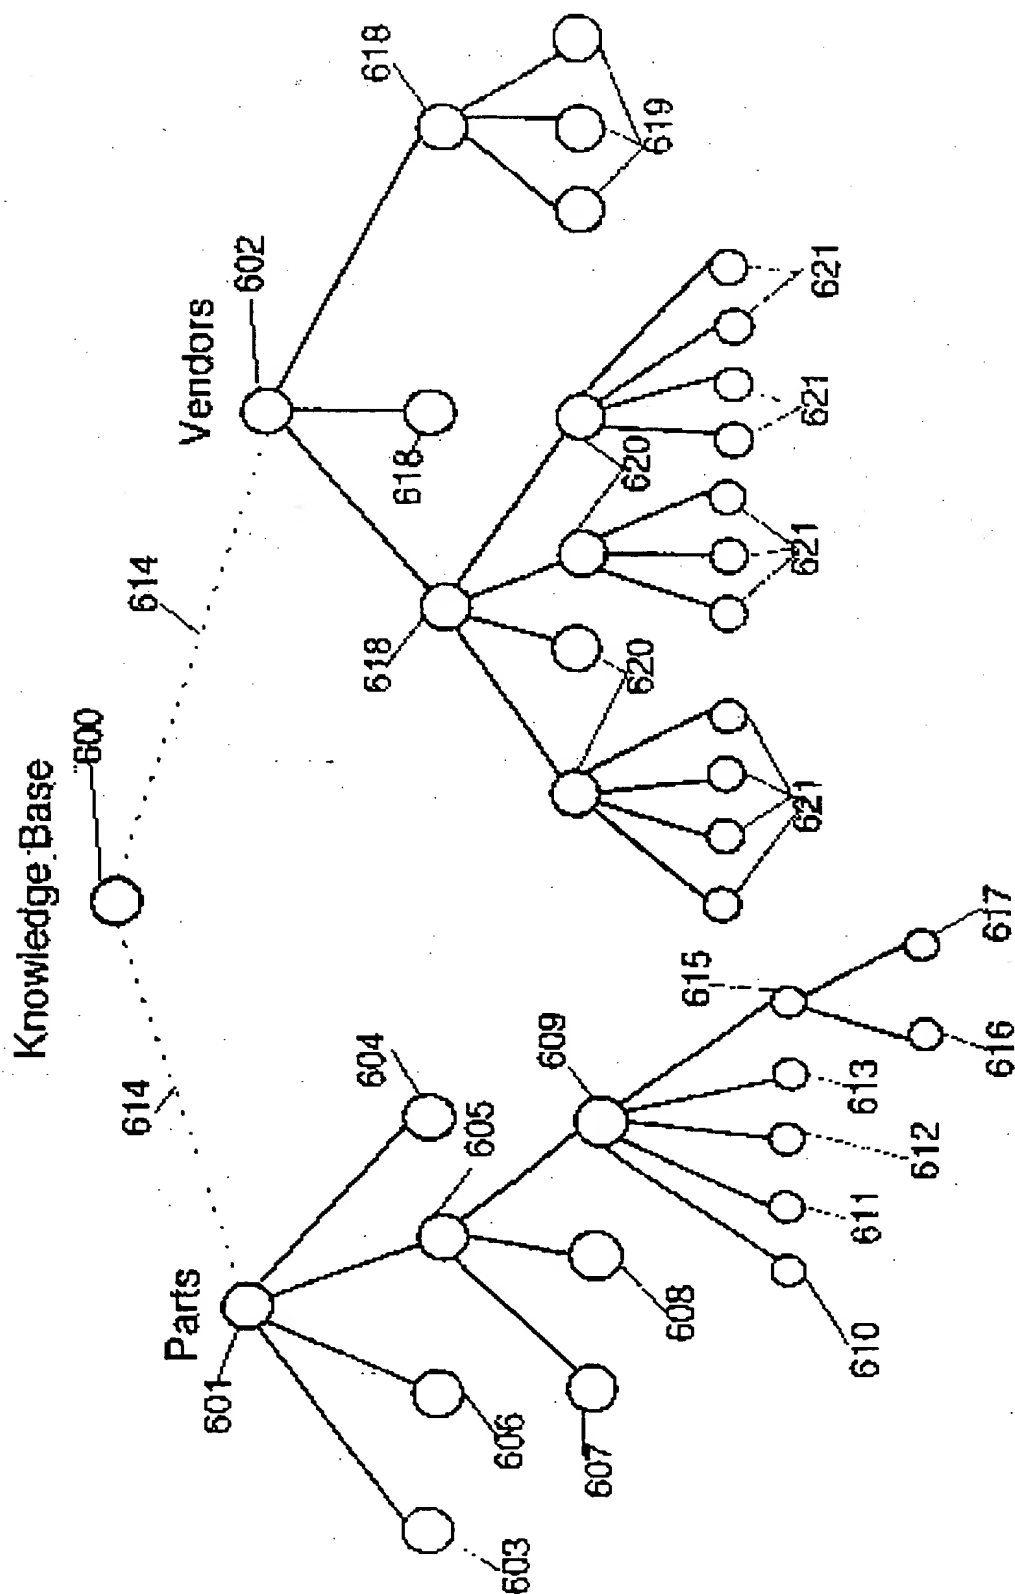


FIG. 26A

27/64

626	Vendor Code
624	Vendor Part No.
627	Vendor Contact
628	Address
629	Vendor Name
630	Sales Office Locations
631	Dealers Who Carry This Vendor's Merchandise
	...

FIG. 26C

622	Internal Part No.
623	Vendor ID
624	Vendor Part No.
625	Title
626	...

FIG. 26B

28/64

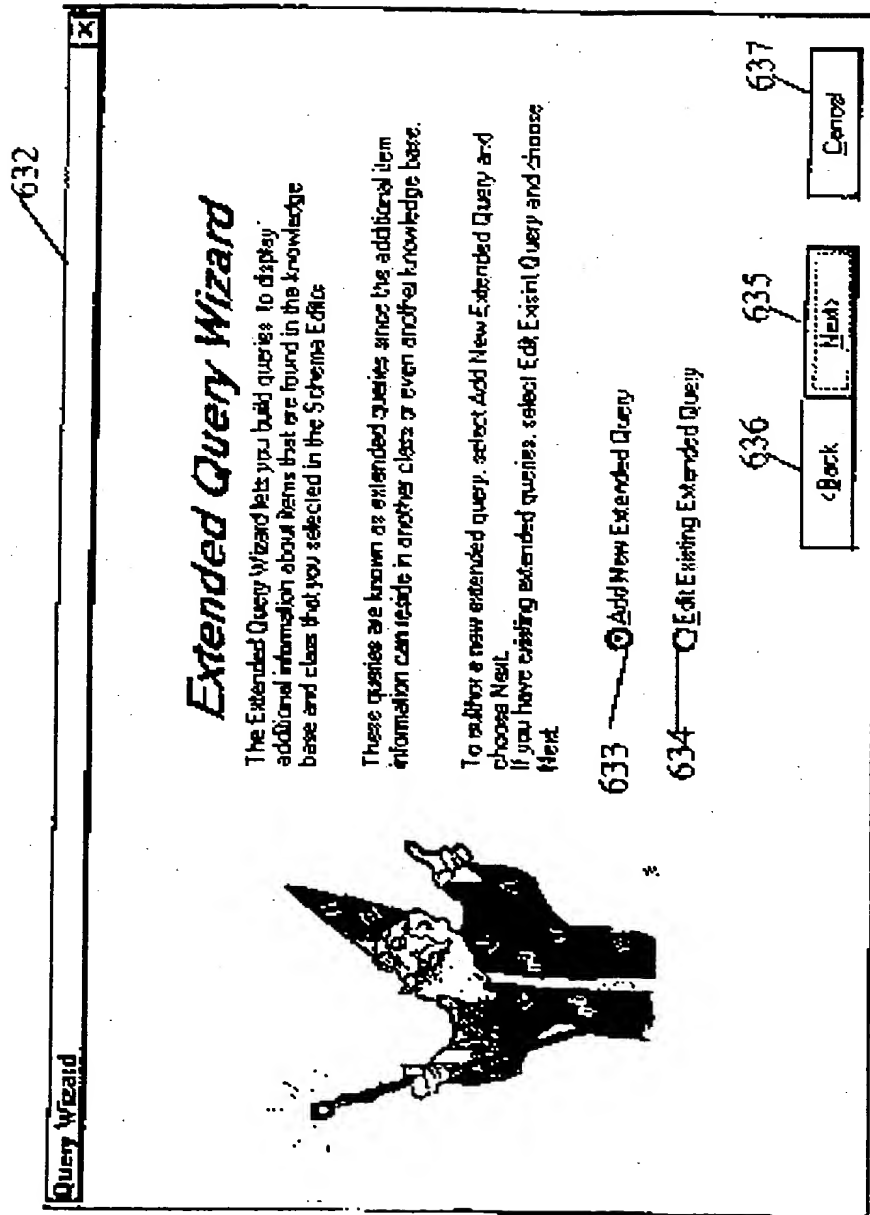


FIG. 27

29/64

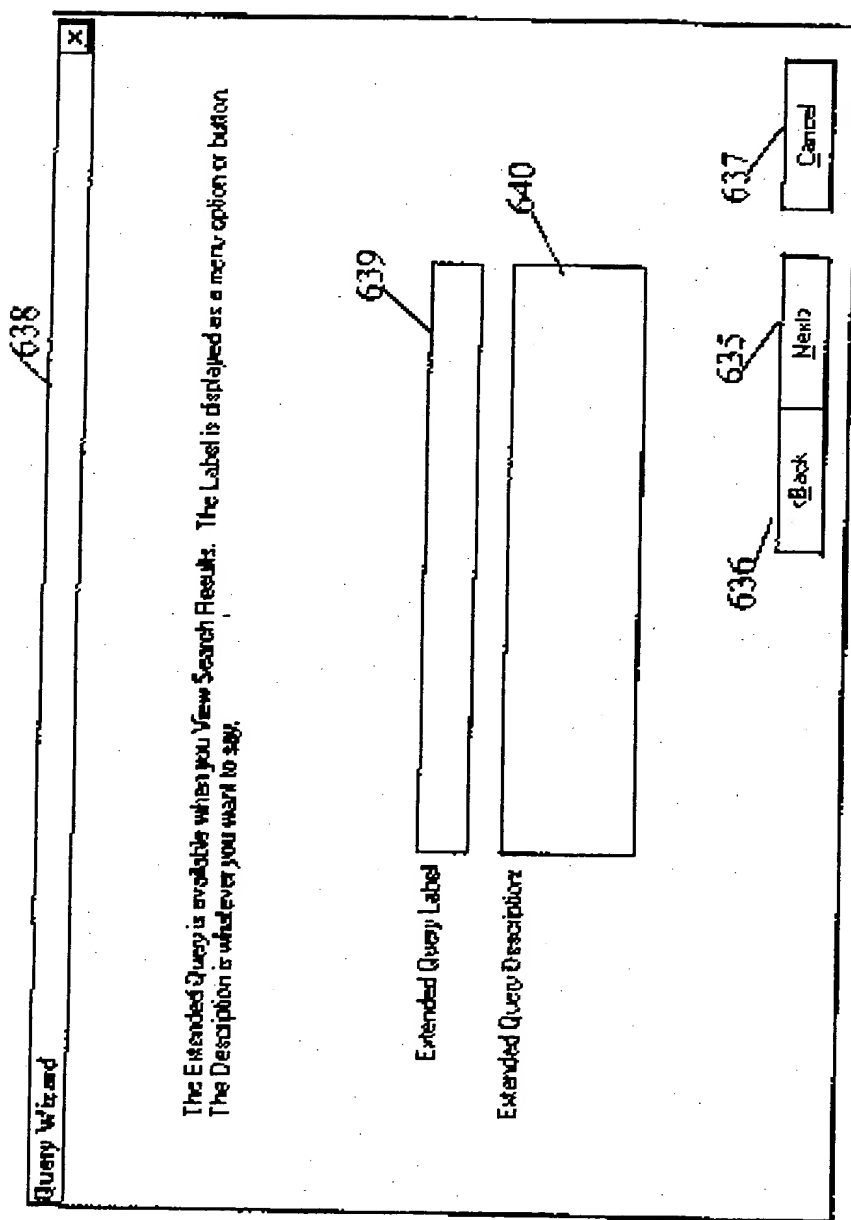


FIG. 28

30/64

The image shows a 'Query Wizard' dialog box with a title bar containing a close button (X). The dialog contains three main input fields: a 'Name' field (639), a 'Description' field (640), and a 'Class' field (635). Below the 'Class' field are three buttons: '< Back' (636), 'Next >' (637), and 'Cancel' (638). Two numbered callouts point to the 'Next >' button: callout 642 points to the button itself, and callout 643 points to the text 'Use the owning class of the instance when running the query'.

641

639

640

642

643

636

637

638

635

Back

Next >

Cancel

Use the owning class of the instance when running the query

FIG. 29

31/64

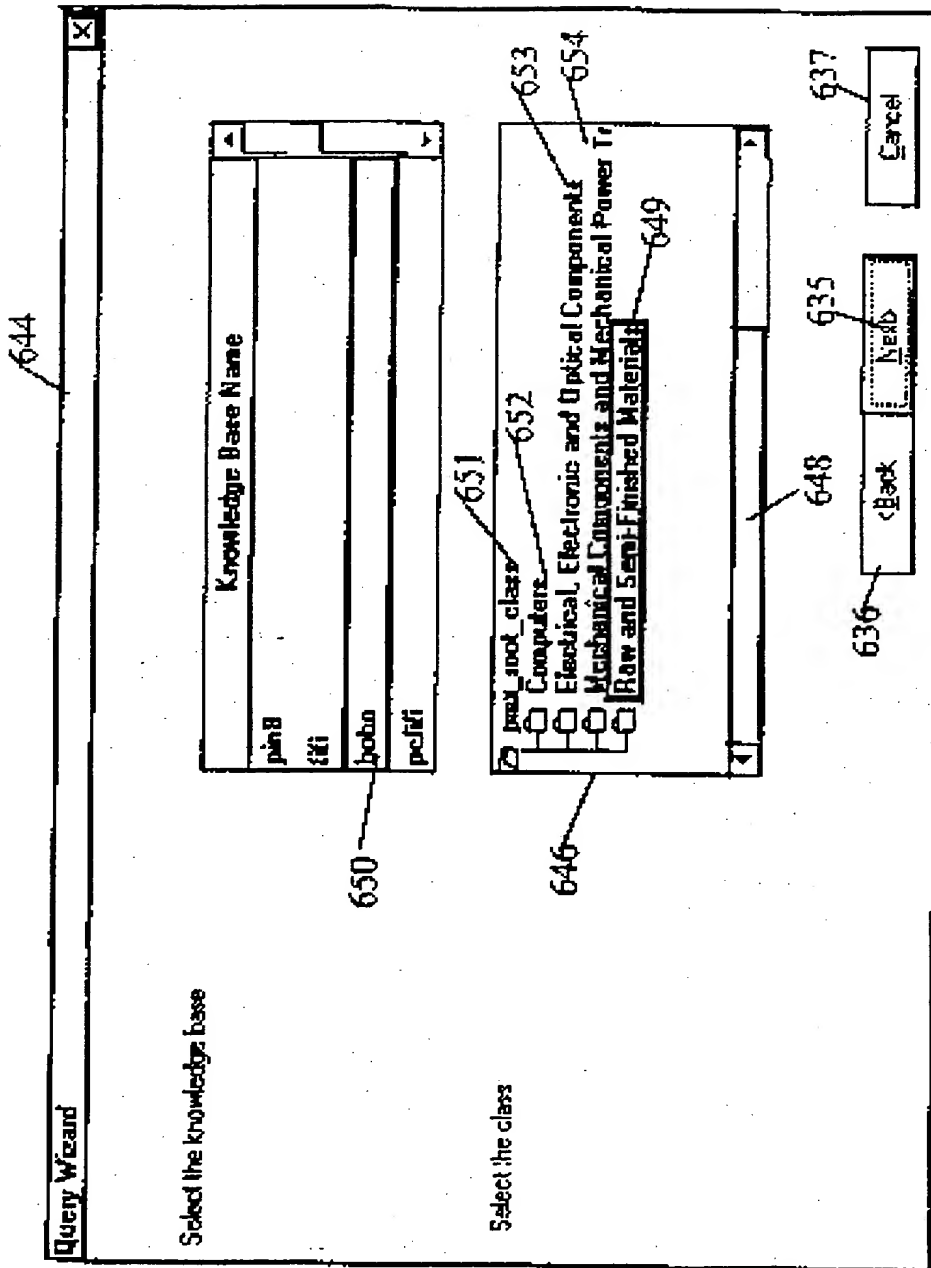


FIG. 30

32/64

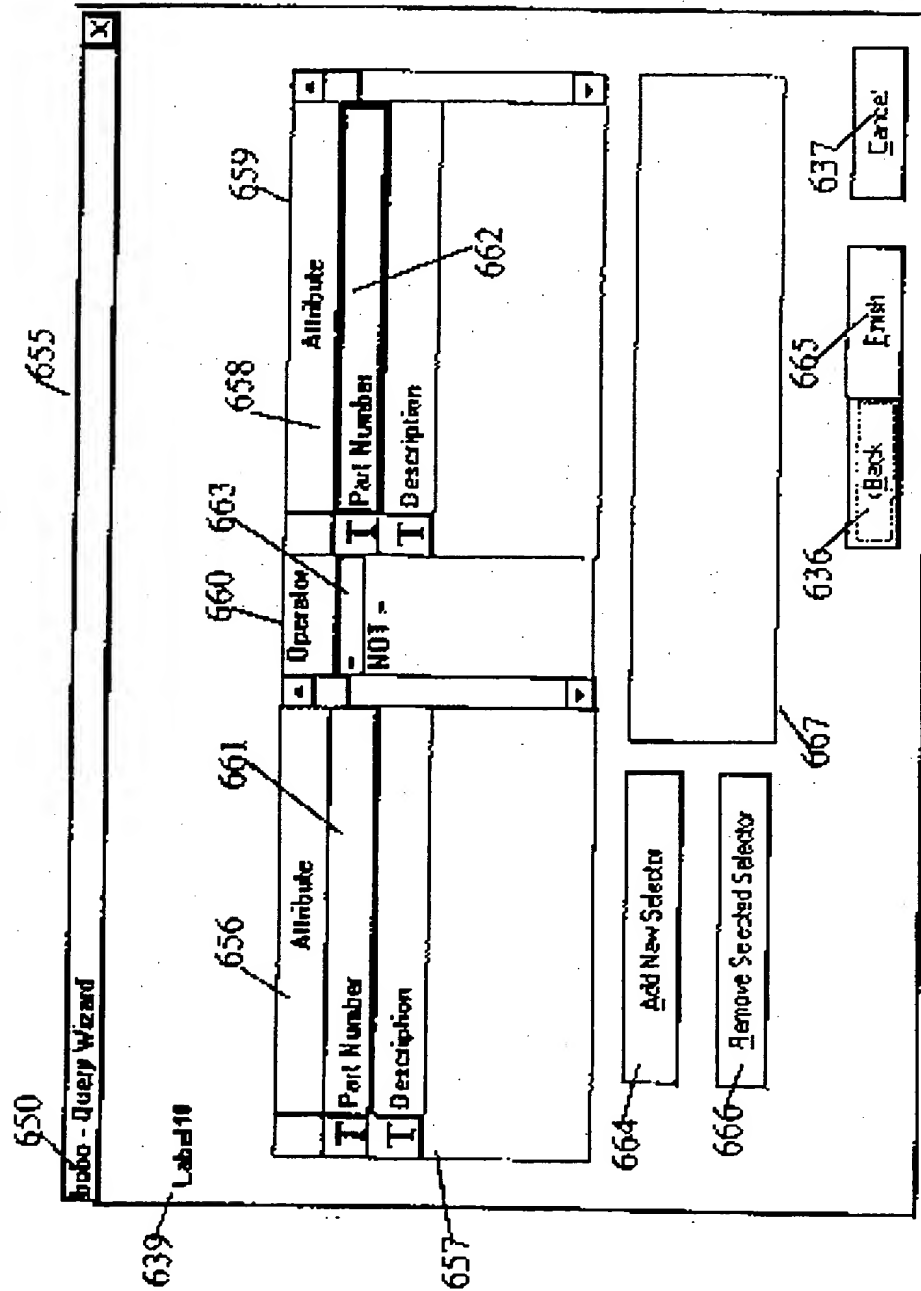


FIG. 31



33/64

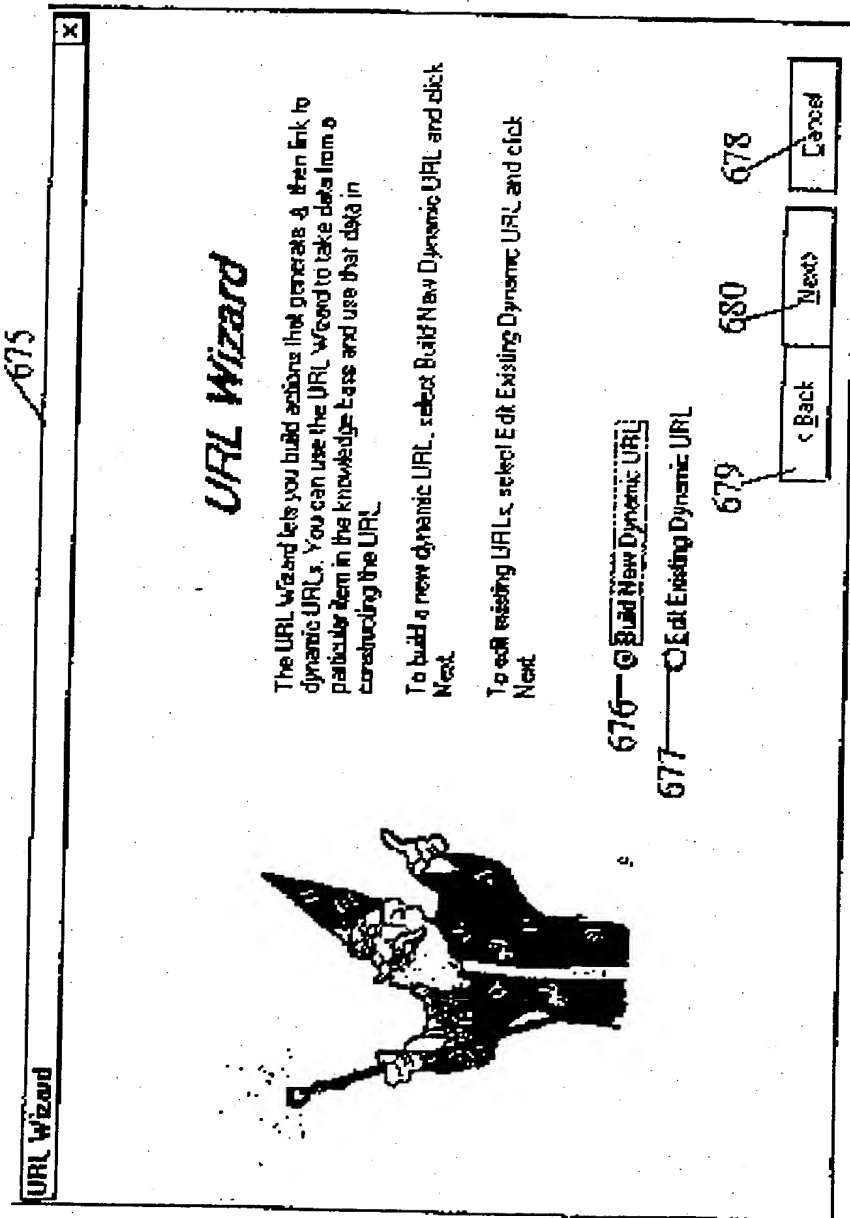


FIG. 32

34/64

URL Wizard

686

URL Label

682

HTTP

683

Description

684

Graphic

685

< Back

679

Next >

680

Cancel

678

681

FIG. 33

35/64

**URL Wizard** [X]

URL Prefix:  (687)

Substitutable URL Parameters:

parameter	name	value
<input type="checkbox"/> Knowledge Base Name		DBNAME
<input type="checkbox"/> Instance Handle		IHANDLE
<input type="checkbox"/> User Login Name		LOGIN
<input type="checkbox"/> Part Number		Part Number

URL Prefix Template:  (690)

Navigation: < Back (679), Next > (680), Cancel (678)

FIG. 34

86/64

URL Wizard
X

URL Prefix Template  
 http://

Substitutable URL Parameters:

Parameter	name	value
<input type="checkbox"/> Knowledge Base Name	KBname	DBNAME
<input type="checkbox"/> Instance Handle	INST	__HANDLE__
<input type="checkbox"/> User Login Name	LOGIN	__LOGIN__
<input type="checkbox"/> Part Number	Part Number	__Part Number__

< Back

Finish

Cancel

FIG. 35

37/64

738

735

NetScape - [Krakaton Demostration]

File Edit View 20 Bookmarks Options Directory Window Help Page

Go Back Forward Home Stop Reload Images Open Print

location: [http://www.madis.com/shot\\_deppet.htm](http://www.madis.com/shot_deppet.htm)

Items Found: 214

Krakaton Parametric Search Engine

739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	
Search Criteria		Product Description		Catalogue Identification		Price		Sale Item		Shipping Options		Color		749		749		749		749	
From: To: 8		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)		YES (16) NO (198)	
Color		Color		Color		Color		Color		Color		Color		Color		Color		Color		Color	
Red (31)		Blue (18)		Green (2)		Yellow (3)		Red (31)		Blue (18)		Green (2)		Yellow (3)		Red (31)		Blue (18)		Green (2)	

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758


759

View Search Attribute Counts New Search Help

Document Done

FIG. 36

38/64

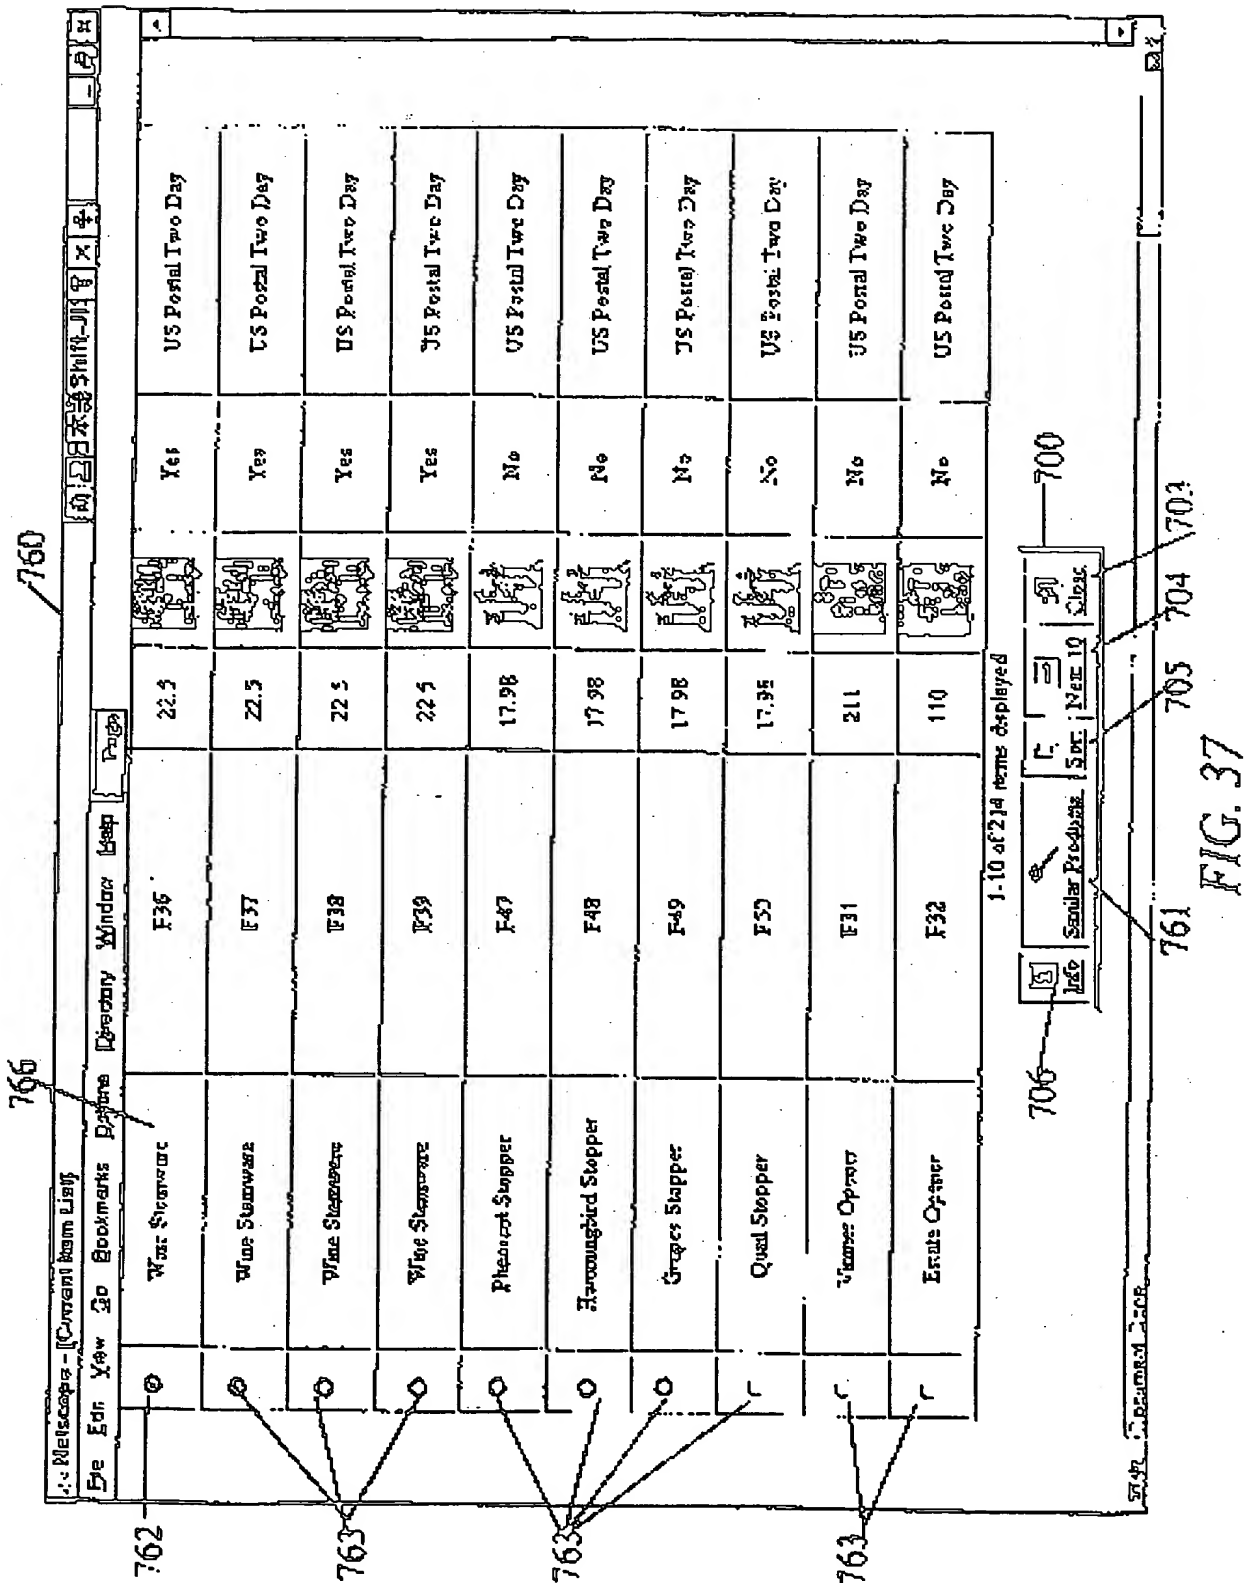

39164

764

764

765

766

767

768

769

770

700






703

706

FIG. 38

1-4 of 4 items displayed

Document Done

Product Description	Catalogue Identification	Price (\$)	Picture	Sale Item	Shipping Options	Volume (oz.) (#)	Set Size (#)	Manufacturer	Shape	Series
Wine Stemware	F36	22.5		Yes	US Postal Two Day	12	4	Schott Zwiesel	Wine	Brilliance
Wine Stemware	F36	22.5		Yes	US Postal Two Day	12	4	Schott Zwiesel	Wine	Brilliance
Wine Stemware	F37	22.5		Yes	US Postal Two Day	12	4	Schott Zwiesel	Wine	Brilliance
Wine Stemware	F38	22.5		Yes	US Postal Two Day	12	4	Schott Zwiesel	Wine	Brilliance
Wine Stemware	F39	22.5		Yes	US Postal Two Day	12	4	Schott Zwiesel	Wine	Brilliance

1-4 of 4 items displayed

700

703


706

767

FIG. 38


Document Done

40/64

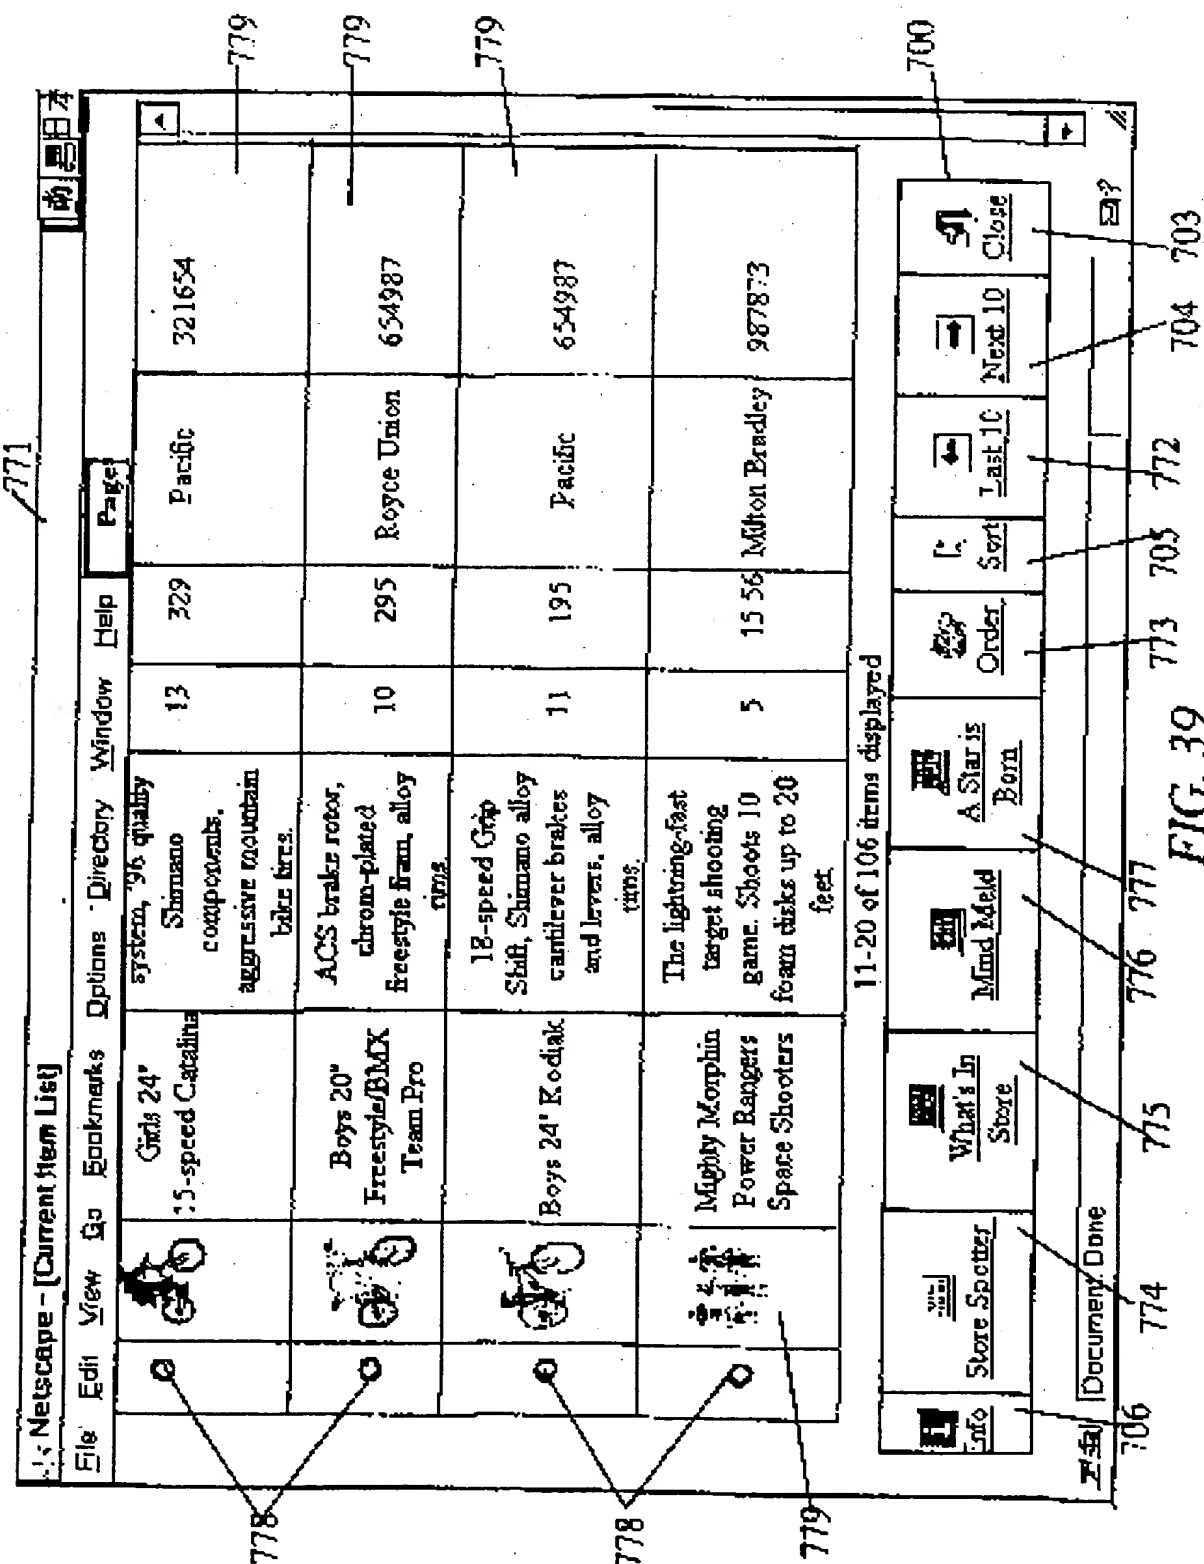




41/64

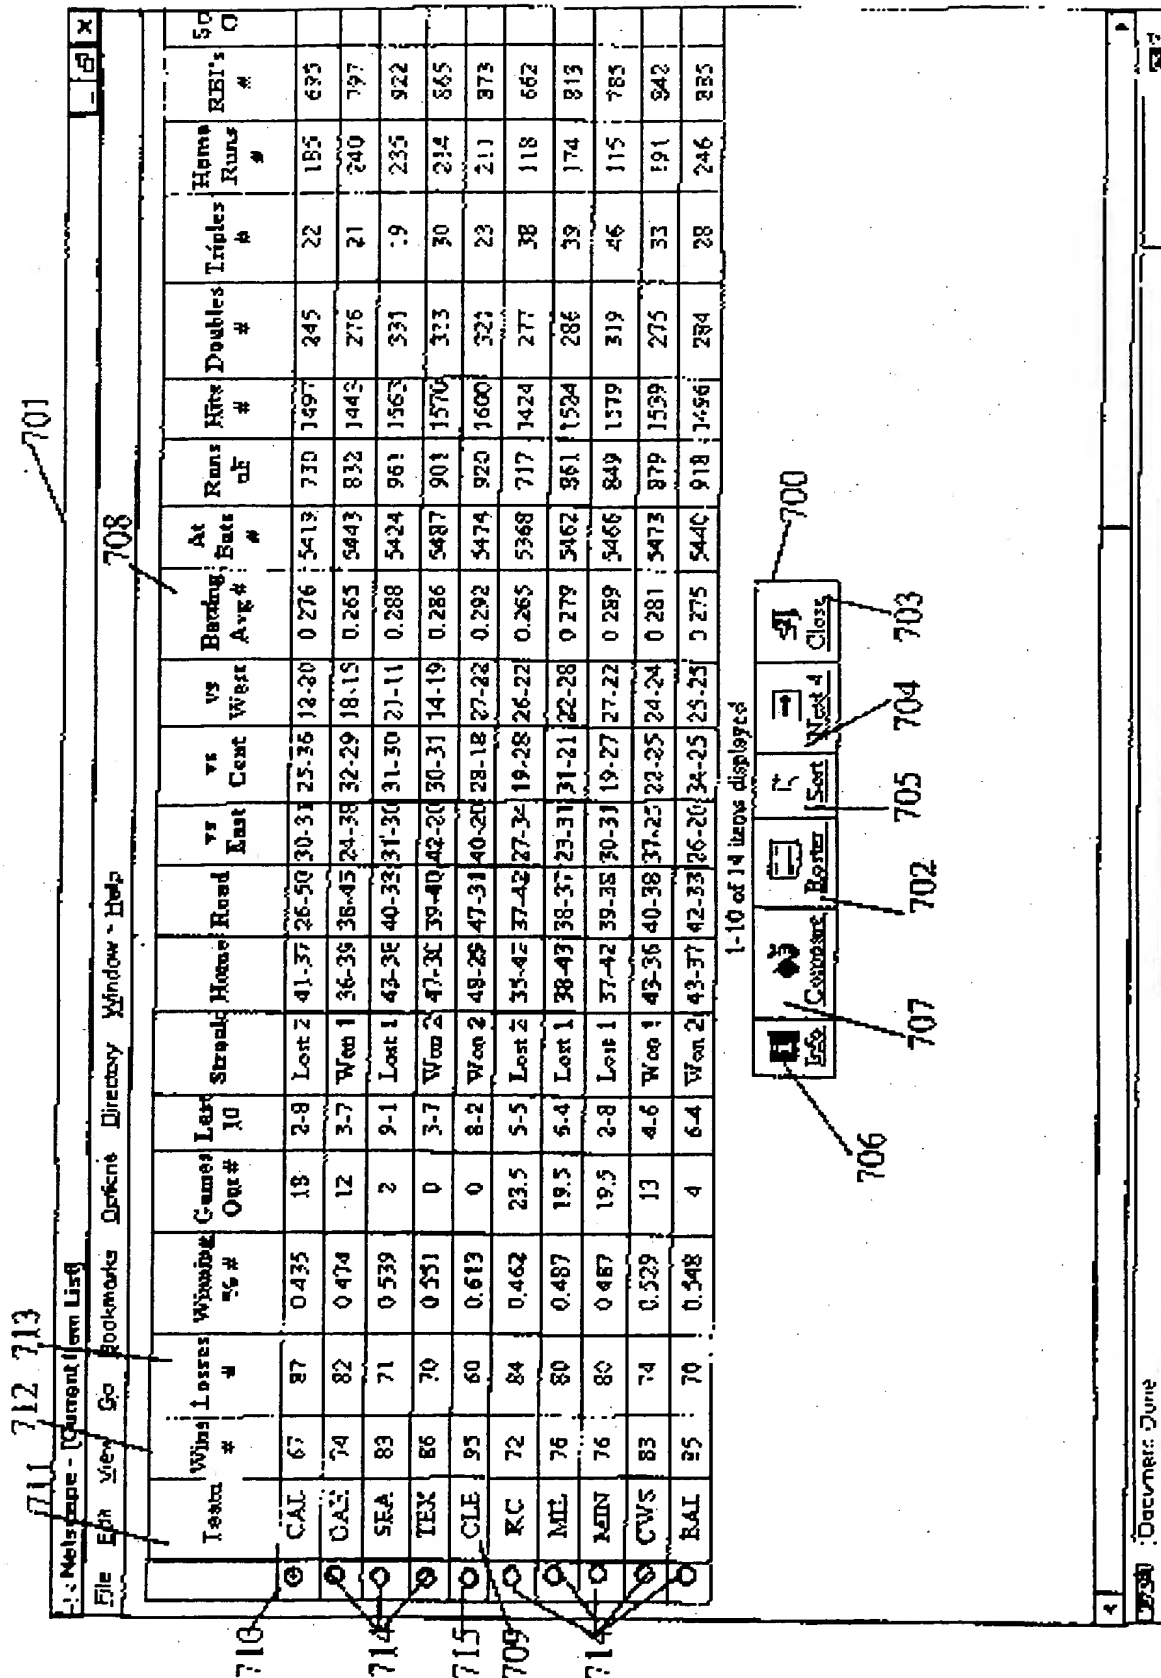

42/64

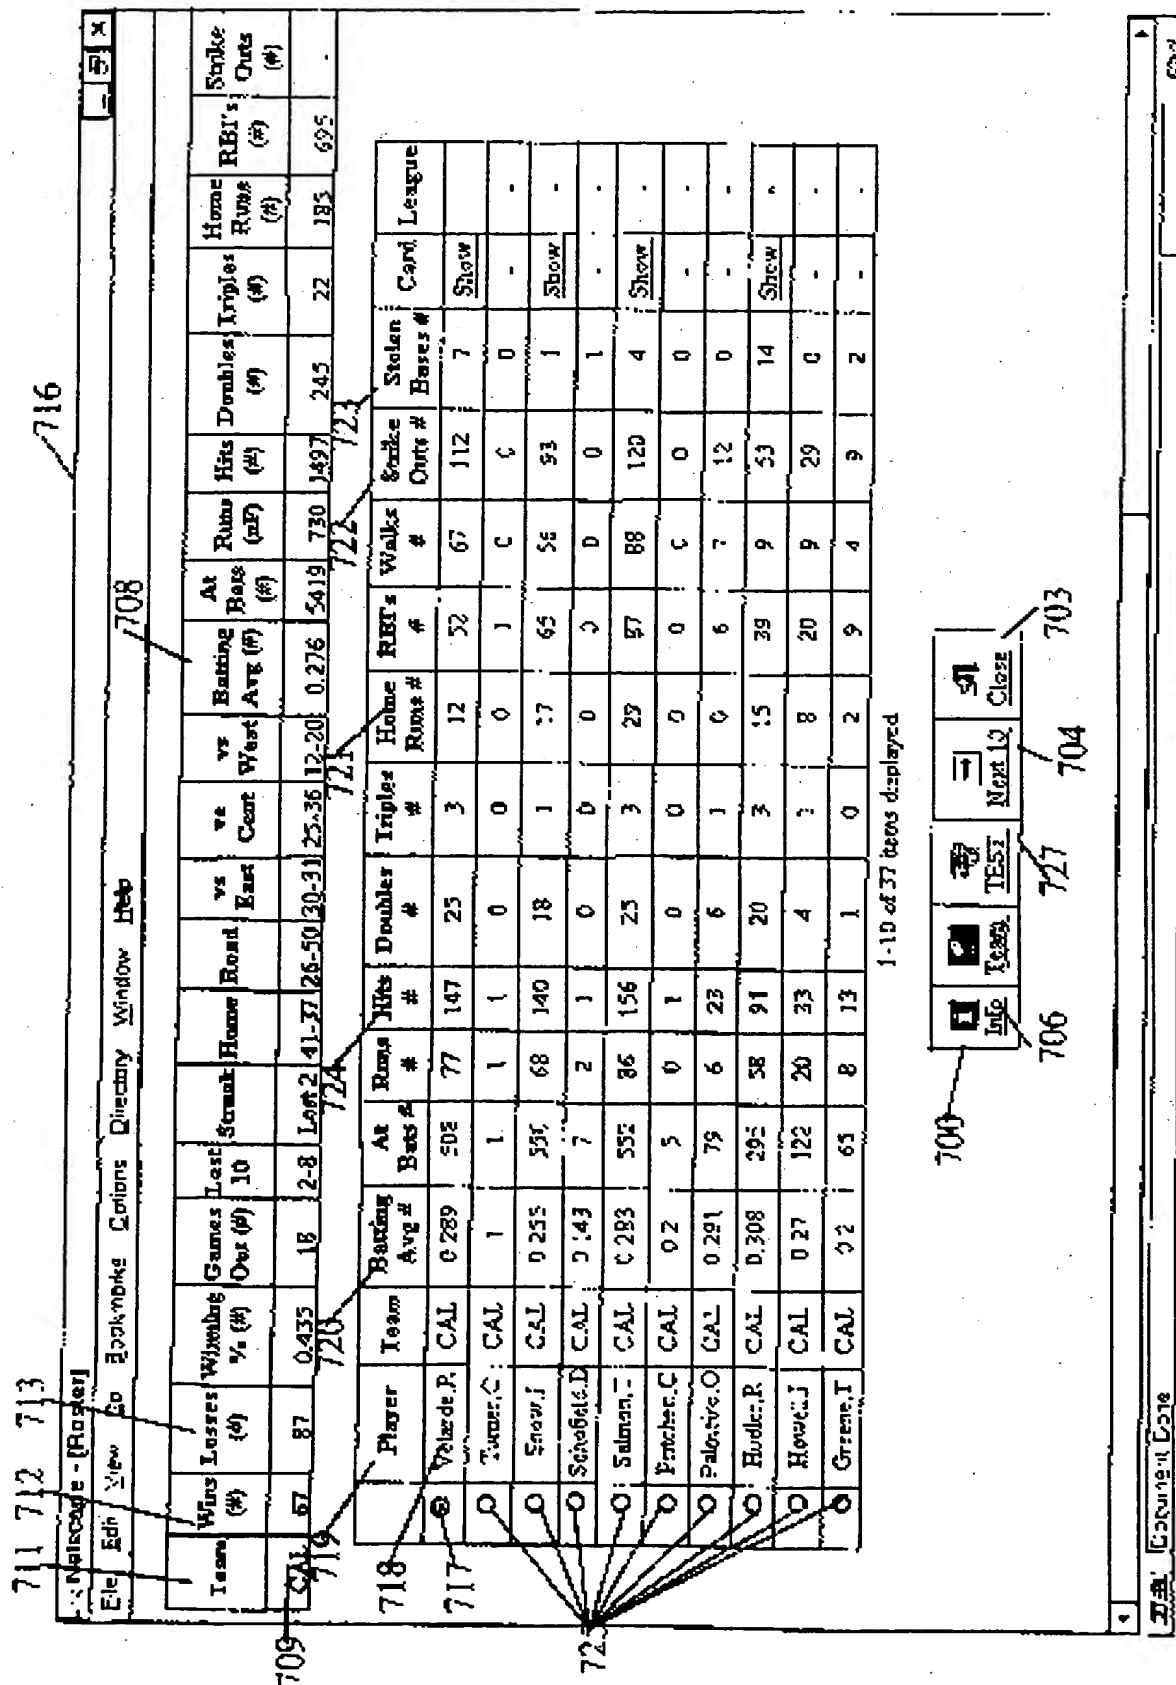

43/64

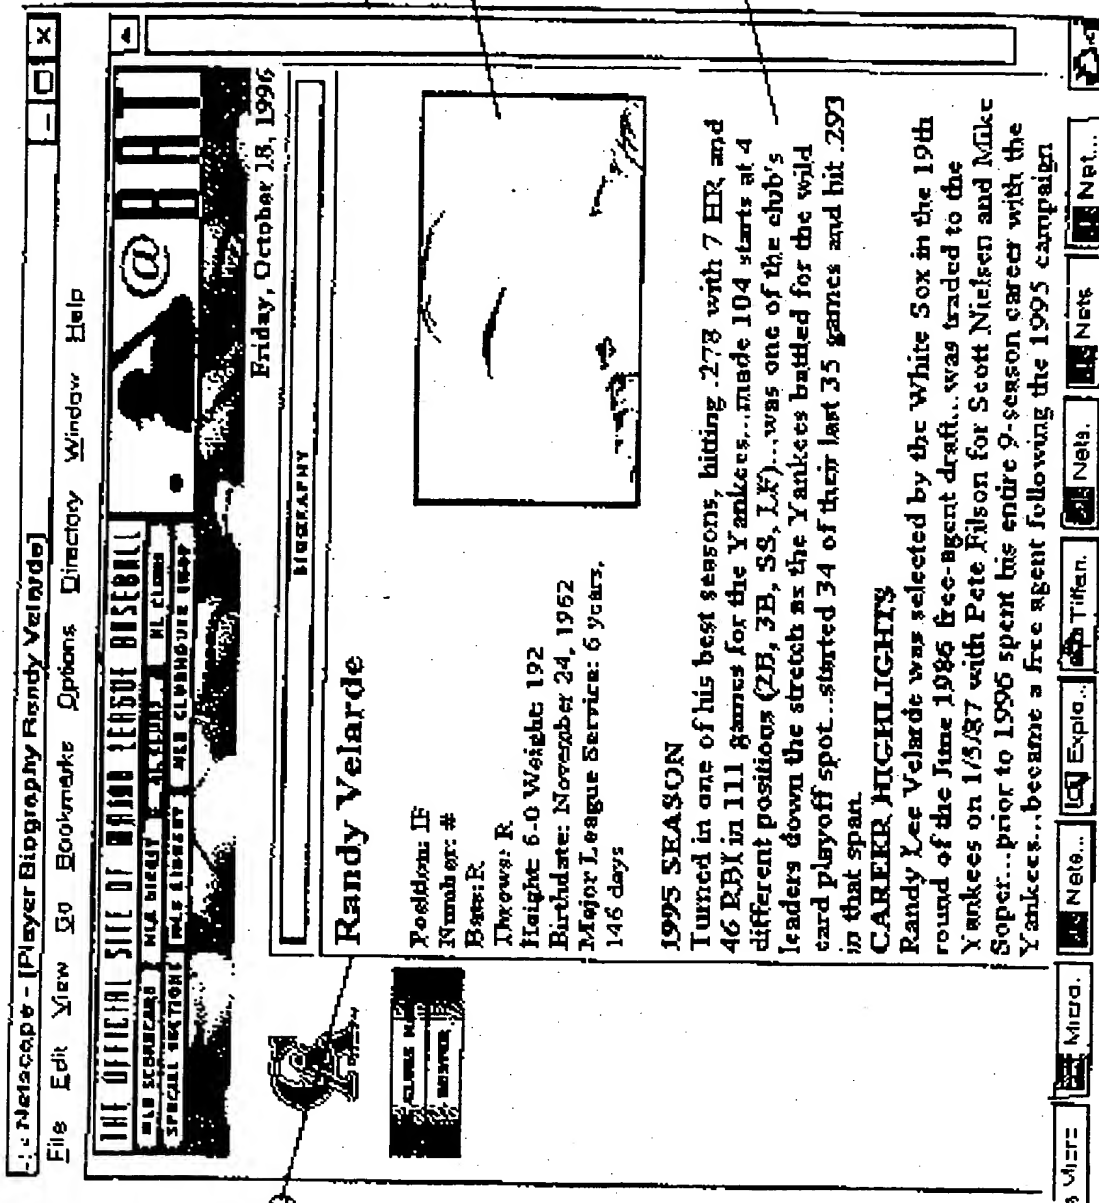


FIG. 42

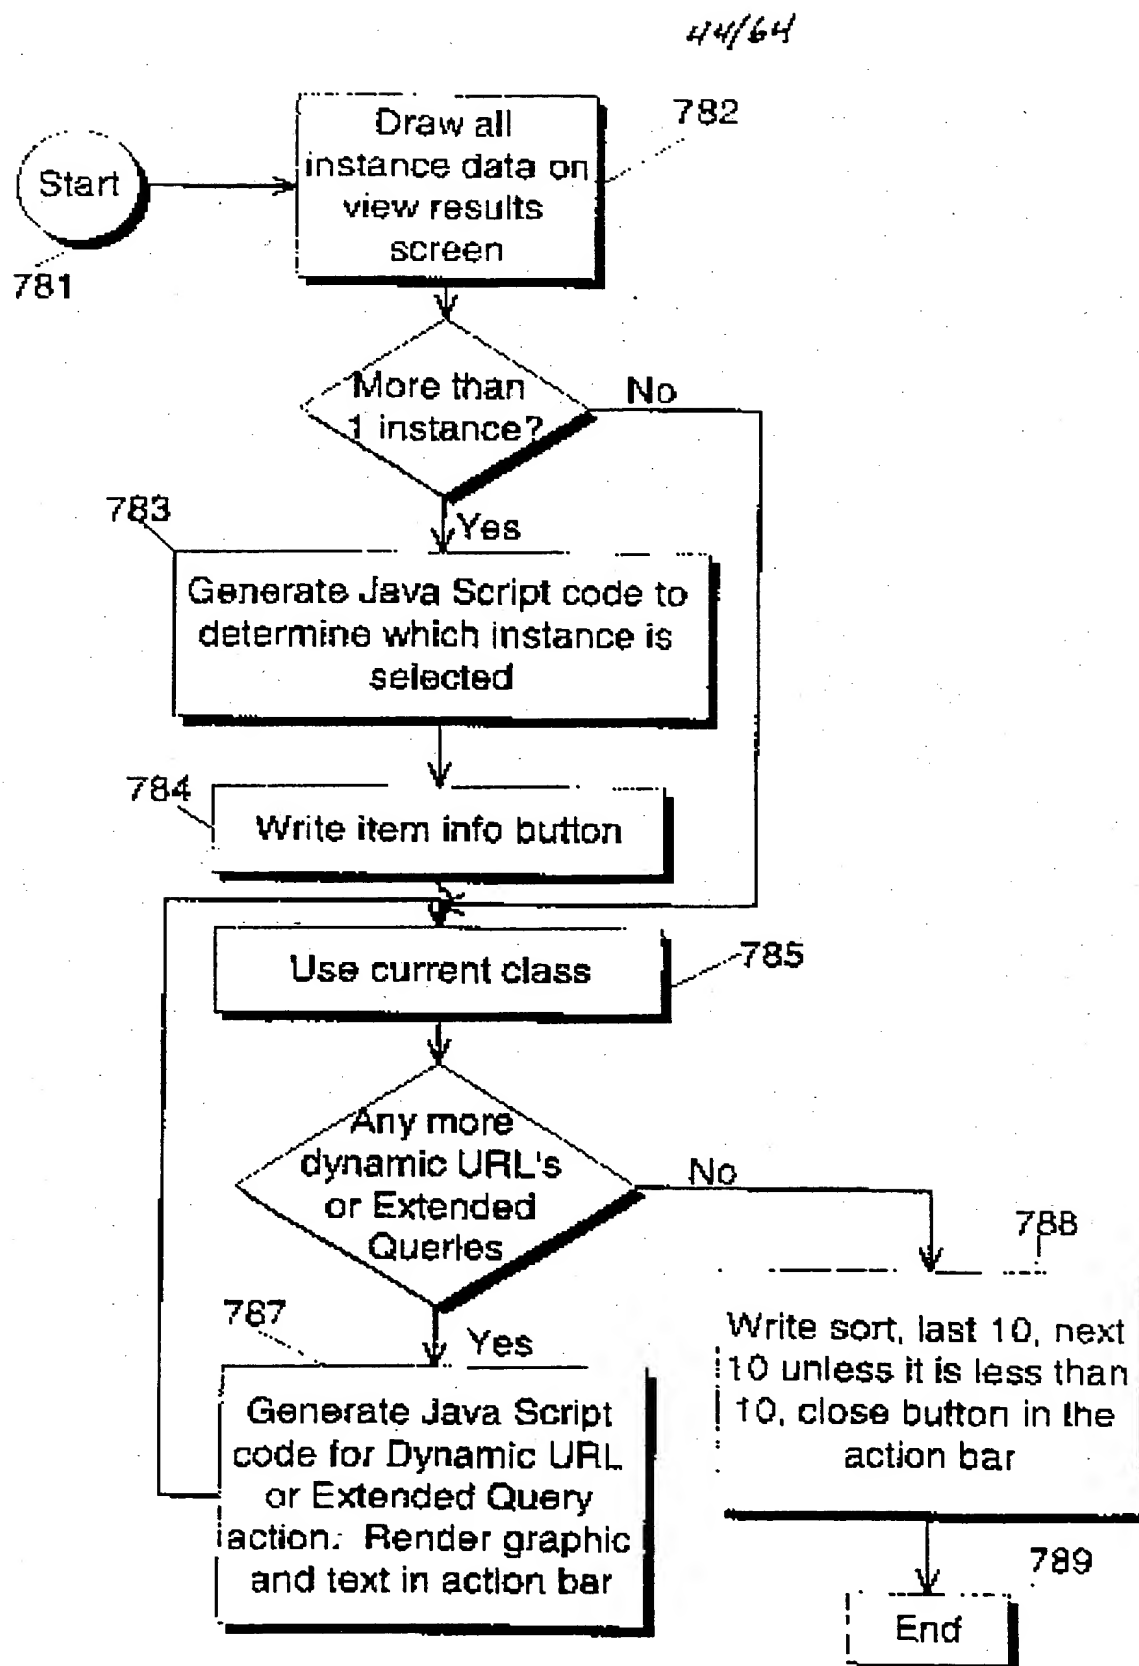


FIG. 43

45/64

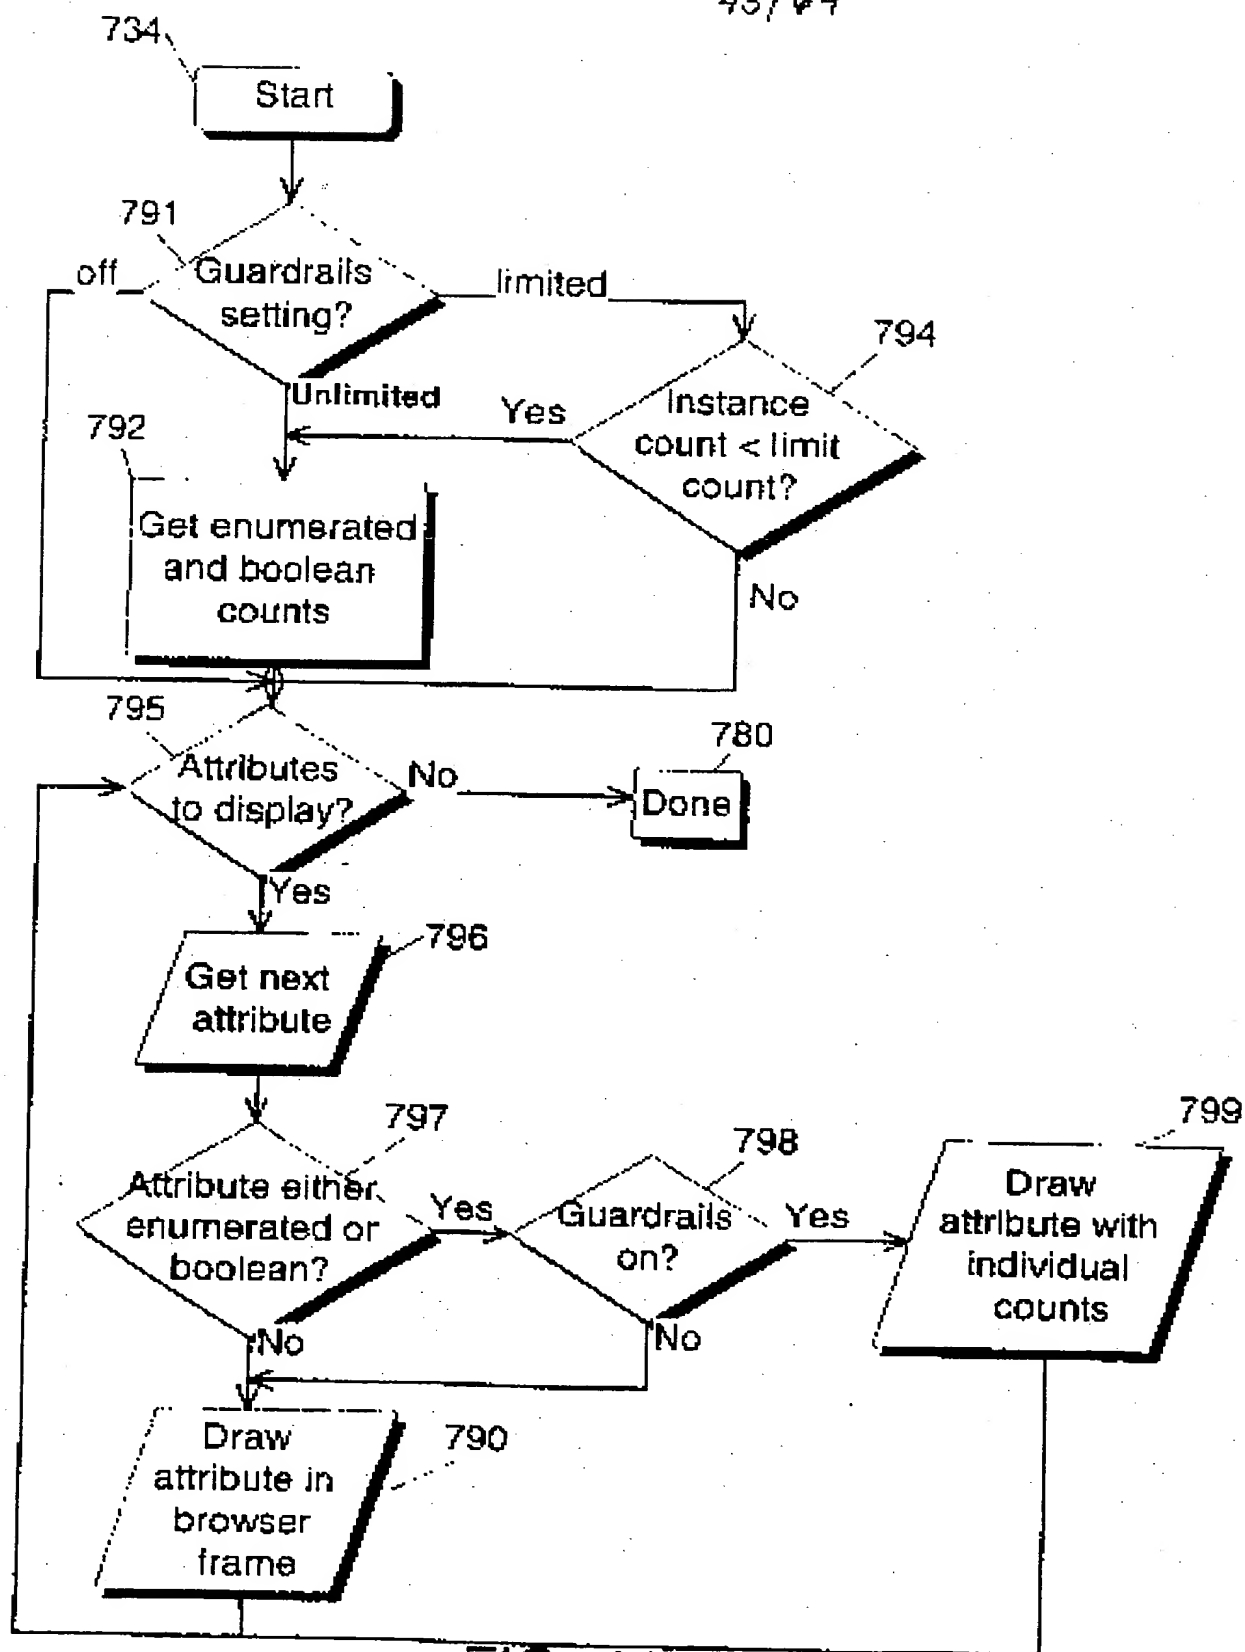


FIG. 44

46/64

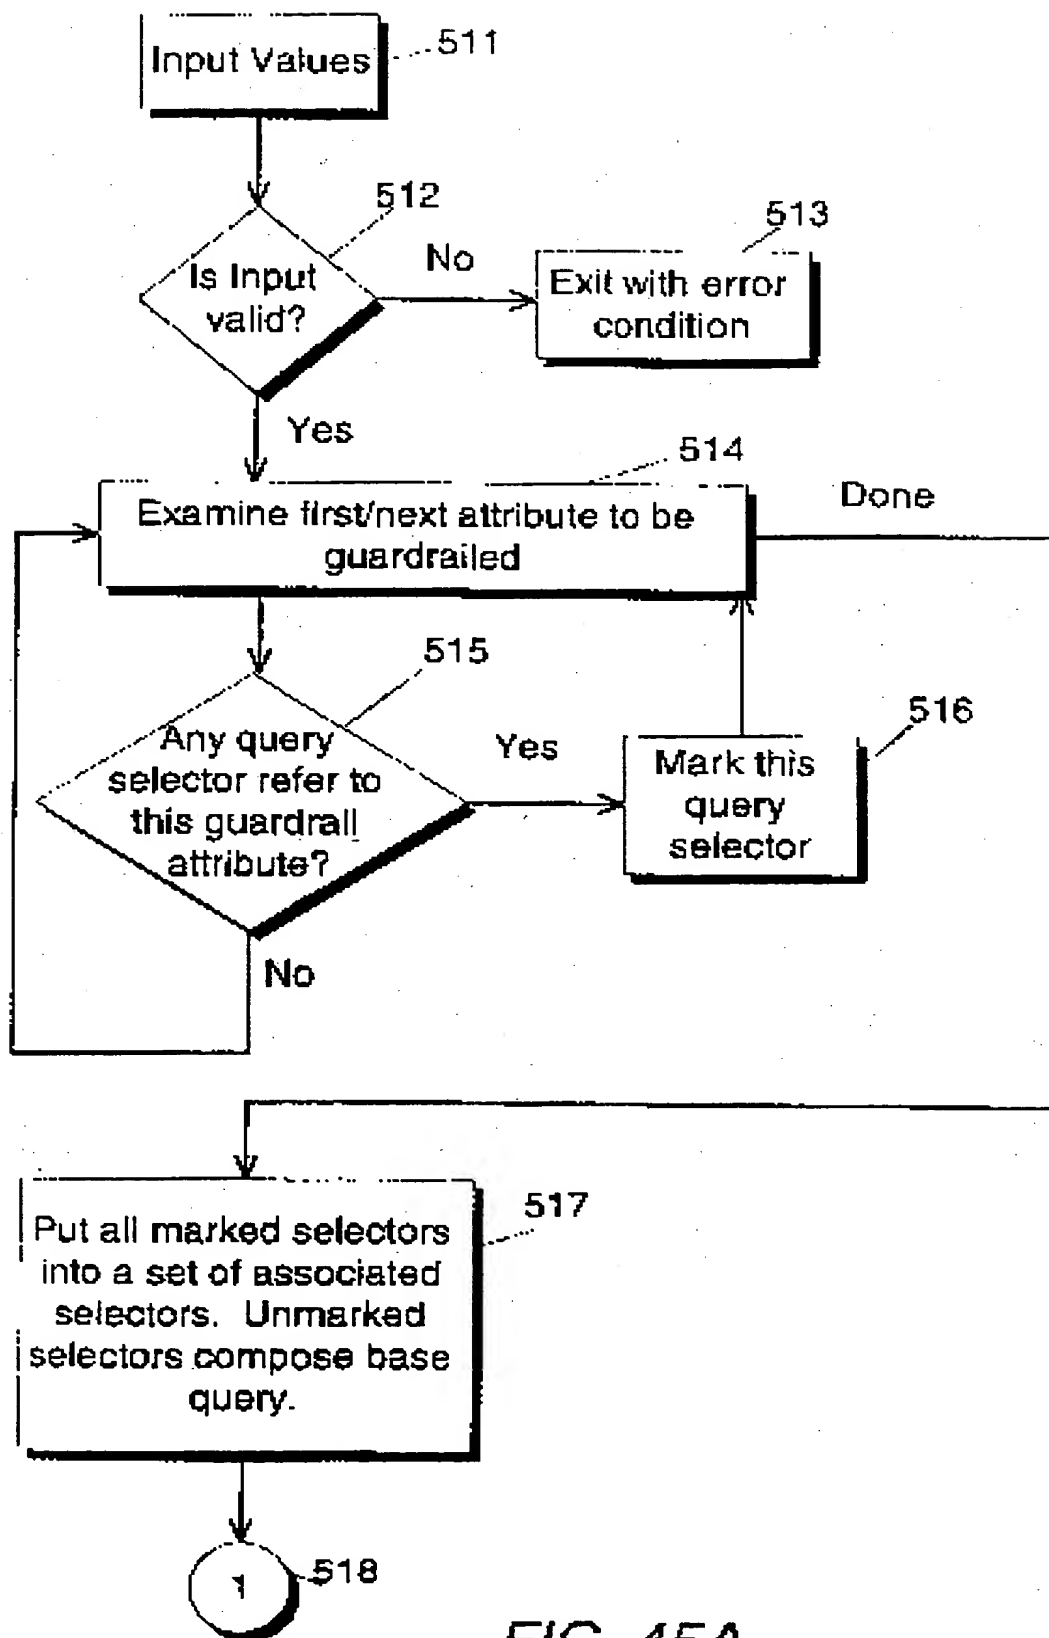


FIG. 45A

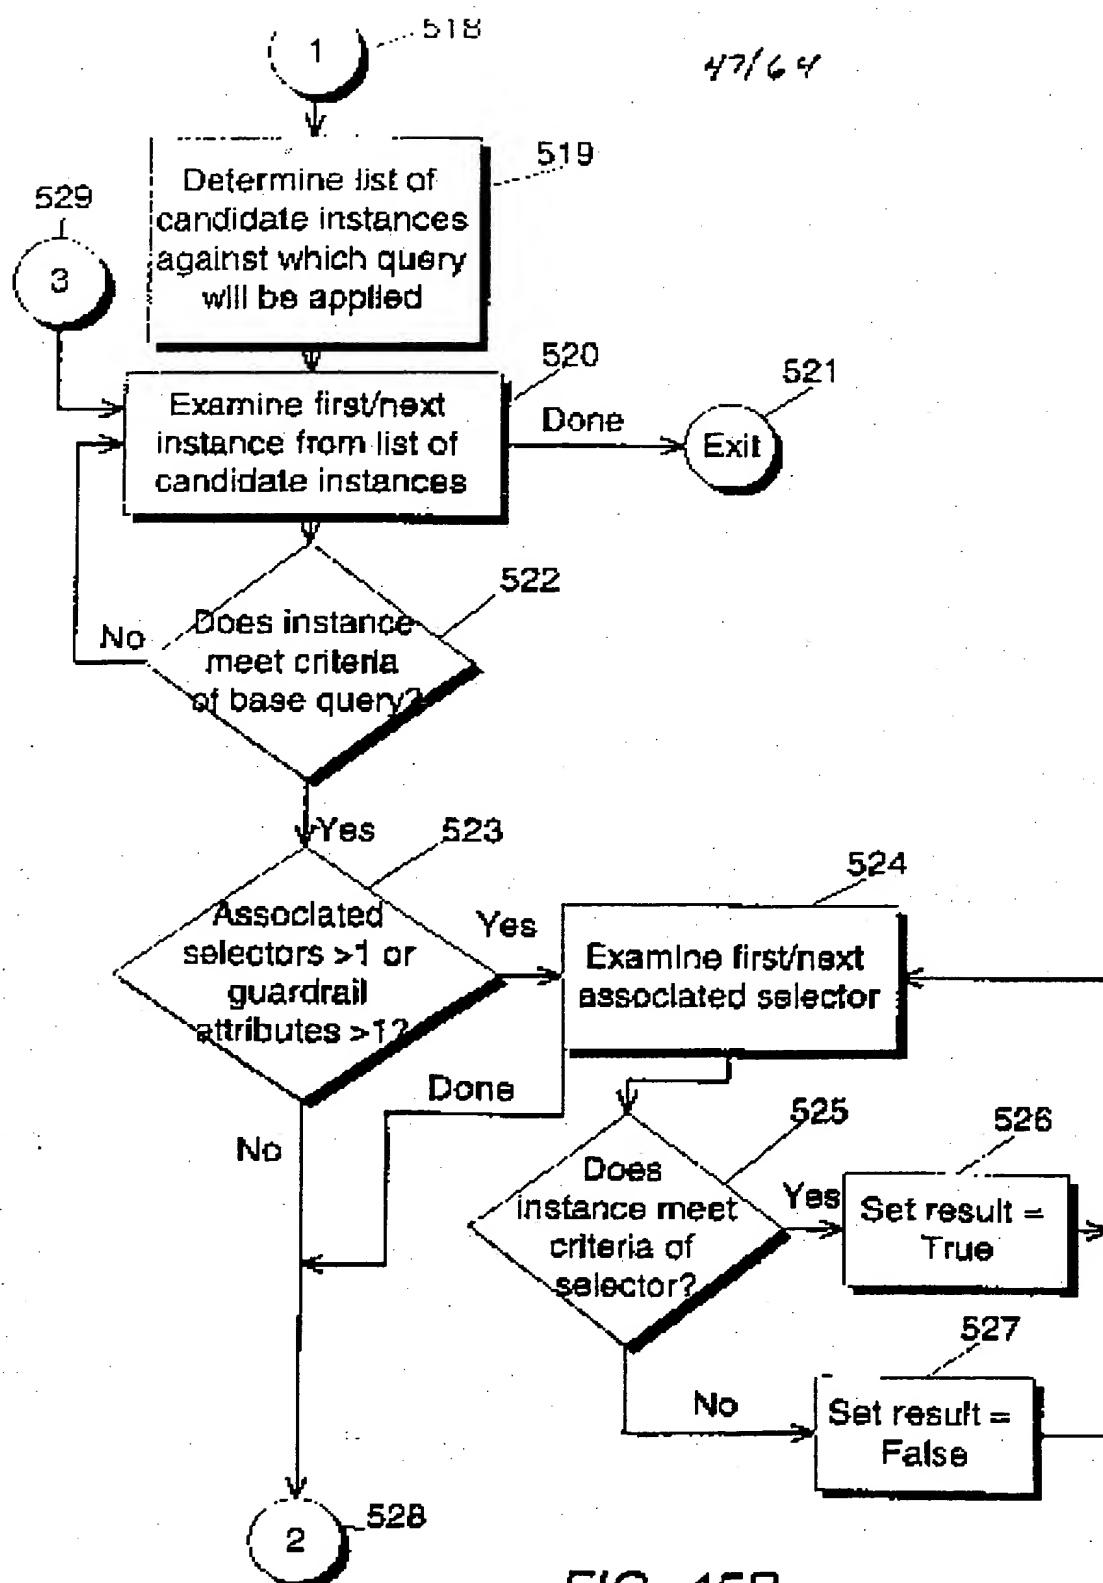


FIG. 45B

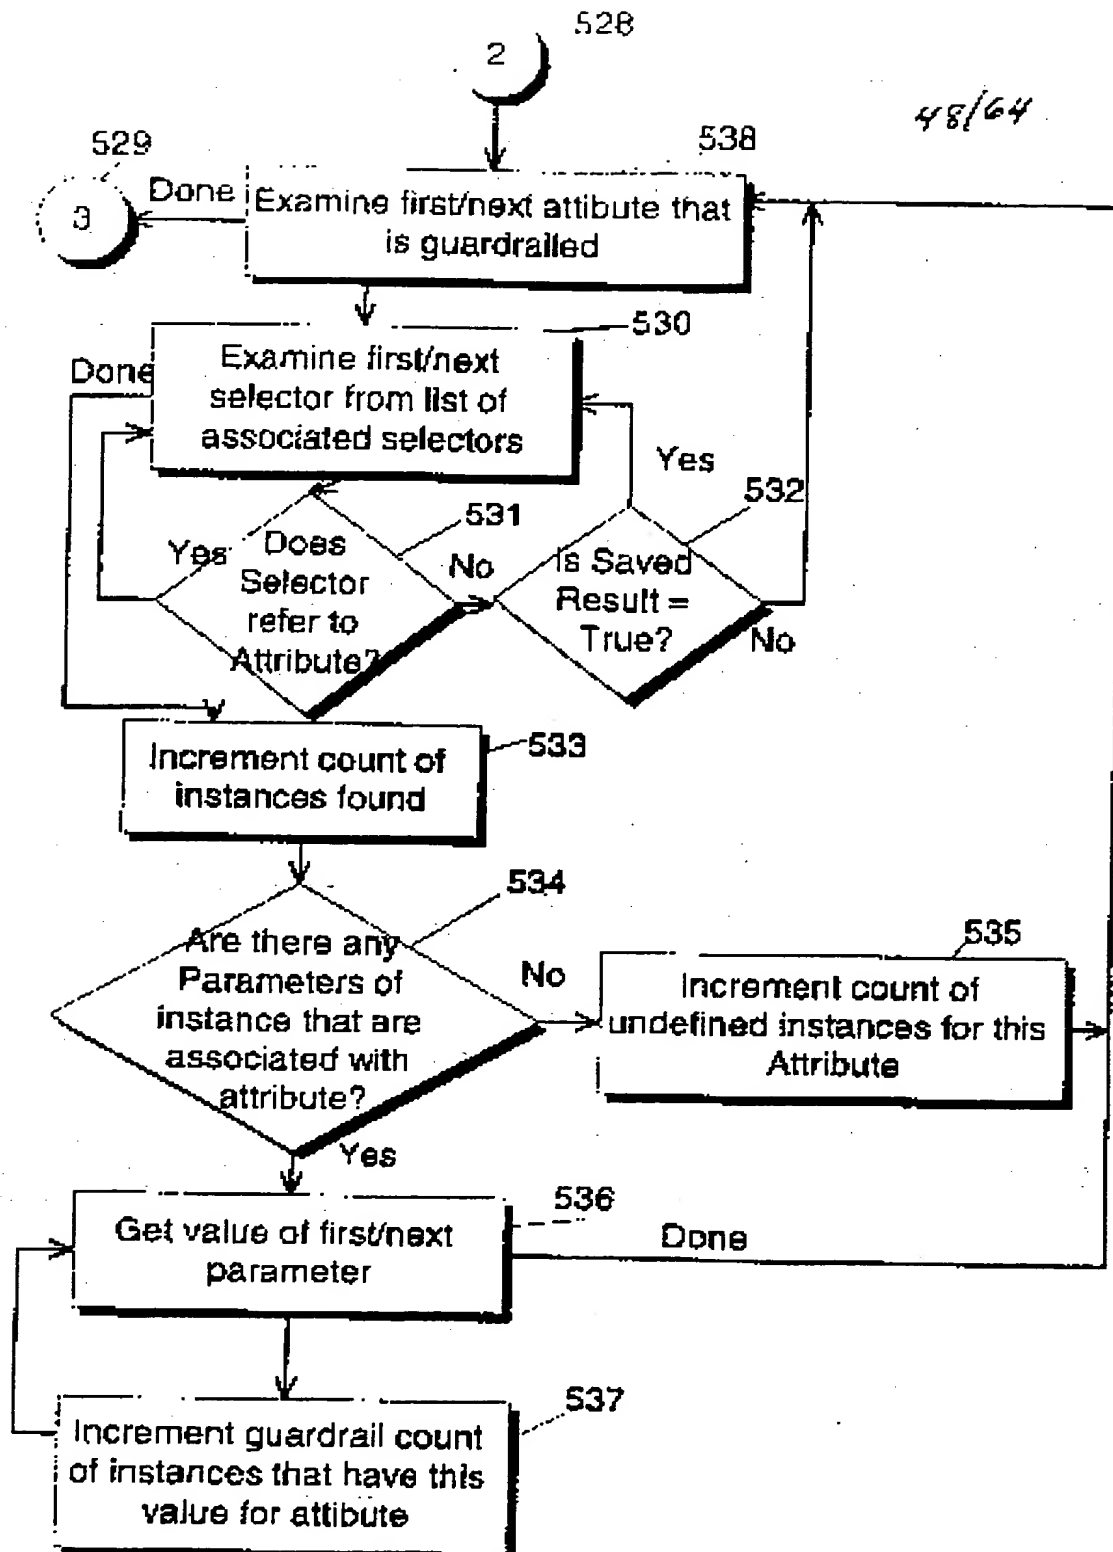


FIG. 45C



49/64

**CADIS-PMX**

File Find Options Tools Window Help

fili - Parts Specification

Query type: Global

Parts Found: 7

Attribute	Value	Search Criteria
1 Vendor Device No.	T	
2 Customer Part Number	T	
Vendor Name	( )	
Address	T	
Telephone	( )	
Discount Rate	7	

245 240 241 247 248 246 244 243 242

Parts

Display Edit Add

Display Order Set All Clear All

Search Criteria Clear All Clear Selected

290

FIG. 46

50/64

**CADIS-PMOX**

File Find Options Tools Window Help

**Parts Specification**

Parts Found: 0

Search Criteria

Attribute	Vendor Device No.	Customer Part Number	Vendor Name
	1	T	
	2	T	
		( )	

Add Part

Parts

Display Edit Cancel

245 246 243 248

275

FIG. 47

51/64

52/64

**CADIS-PHX**

File Find Options Tools Window Help

Parts Found: 22

File - Parts Specification

Query Name: Global

Attribute	Search Criteria
1 Vendor Device No.	T
2 Customer Part Number	T

File - Schema Developer

Attribute	Vendor Device No.
1 T	
2 T	
3 ()	
4 T	
5 ()	
6 X	


Display

Add... Delete

Add... Delete Edit...

FIG. 49

53/64

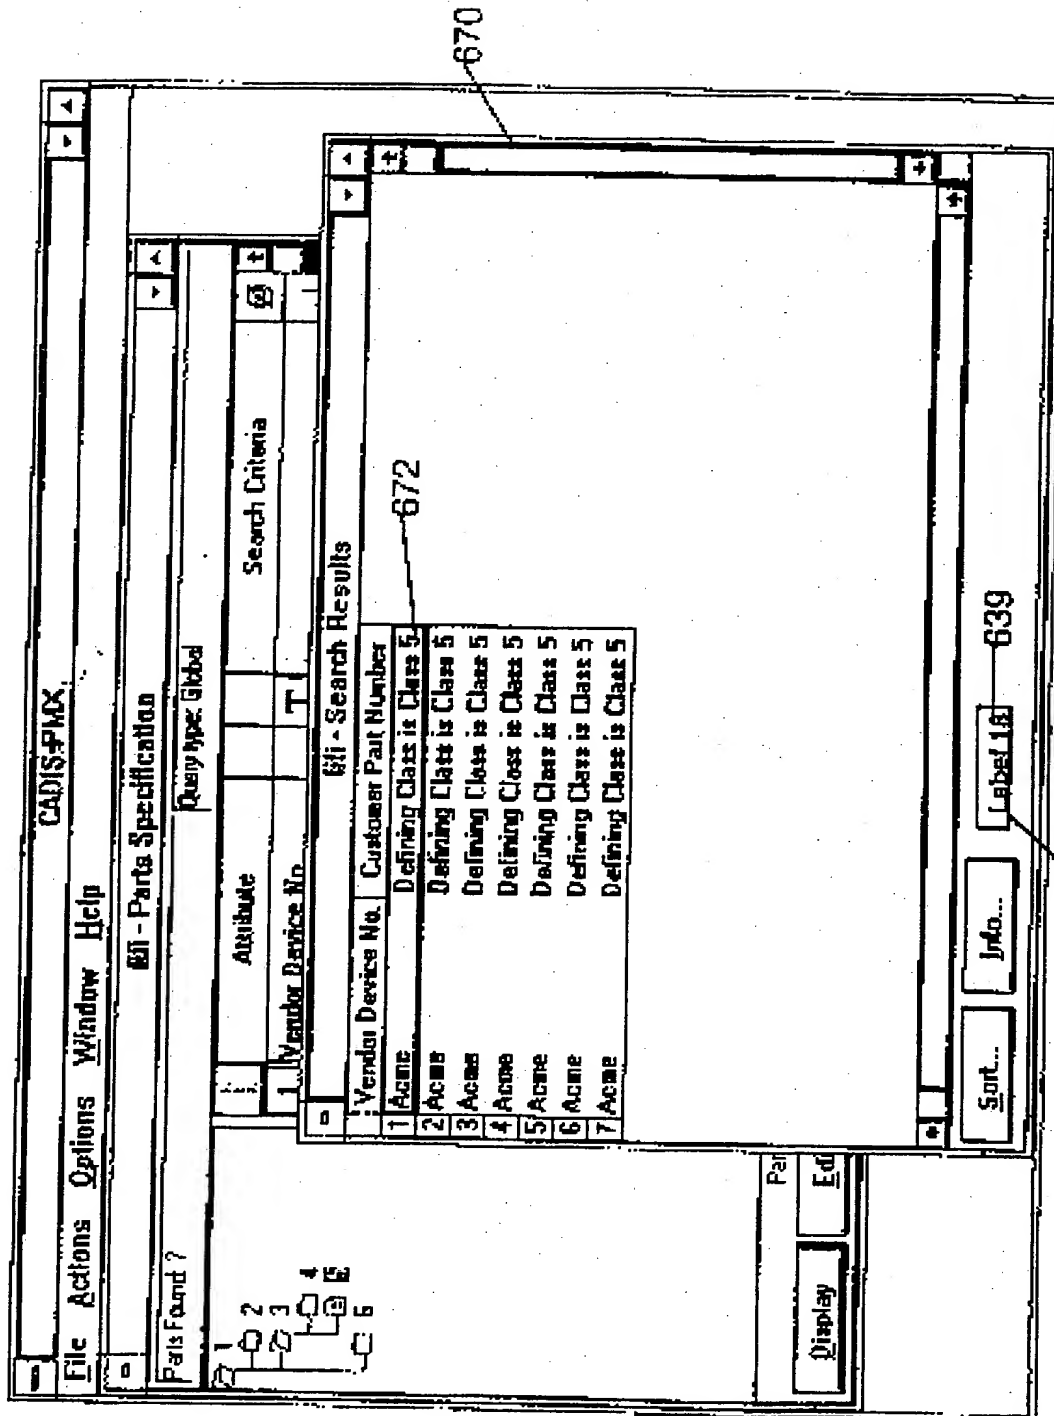

671 FIG. 50

54/64

Parts Editor

☒ LG-22  
☐ LG-40  
☐ C-28  
☐ C-10  
☐ C-12  
☐ Functional  
☐ Module  
☐ Shoulder  
☐ Hubs & Spacers  
☐ Nut  
☐ Screws  
☐ Spacers & Standoffs  
☐ Pins  
☐ Rivets  
☐ Washers  
☐ CW Washers  
☐ Claws & Fluid Handling

Part Number	Description	Material	Head Style	Head Diameter	Length
1 002715061	SCREW PAN HD CR REC MACH #6-32 X 3/4	Steel	Flat	Cruss	.375 inch
2 002715061	SCREW PAN HD CR REC MACH #6-32 X 3/8	Steel	Flat	Cruss	.375 inch
3 002715062	SCREW PAN HD CR REC #6-32 X 1/4	Steel	Flat	Cruss	.25 inch
4 002715061	SCREW PAN HD CR REC MACH #6-32 X 5/16	Steel	Flat	Cruss	.3125 inch
5 0153338	SCREW MACH PAN HD CR REC MACH #6-32 X 1/2 PHC	Steel	Flat	Cruss	.5 inch
6 0153344	SCREW MACH PAN HD CR REC MACH #6-32 UNF X 5/8 IN LG	Steel	Flat	Cruss	.625 inch
7 0153376	SCREW MACH PAN HD CR REC MACH #6-32 UNF X 1.0 PHC	Steel	Flat	Cruss	.7 inch
8 0153378	SCREW PAN HD CR REC MACH #6-32 UNF X 1.74 LG	Steel	Flat	Cruss	1.25 inch

FIG. 51

55/64

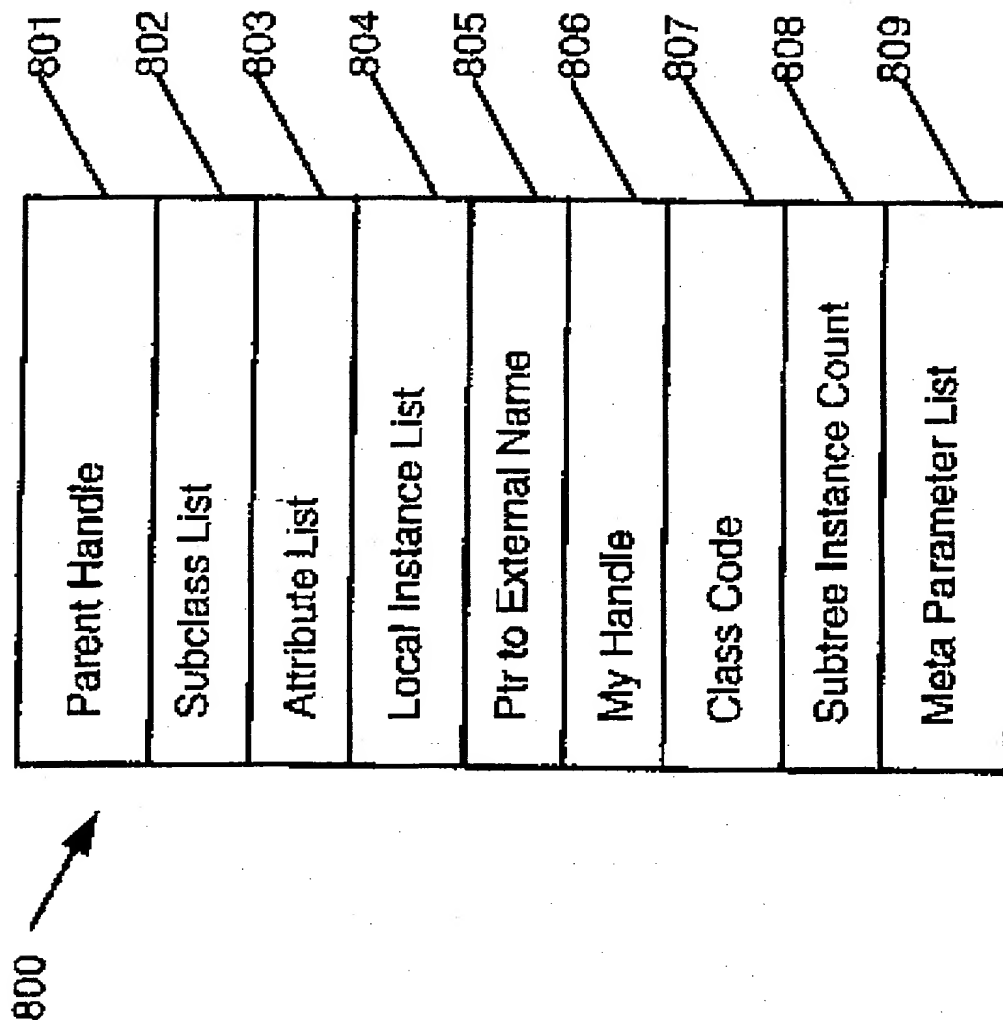


FIG. 52

56/64

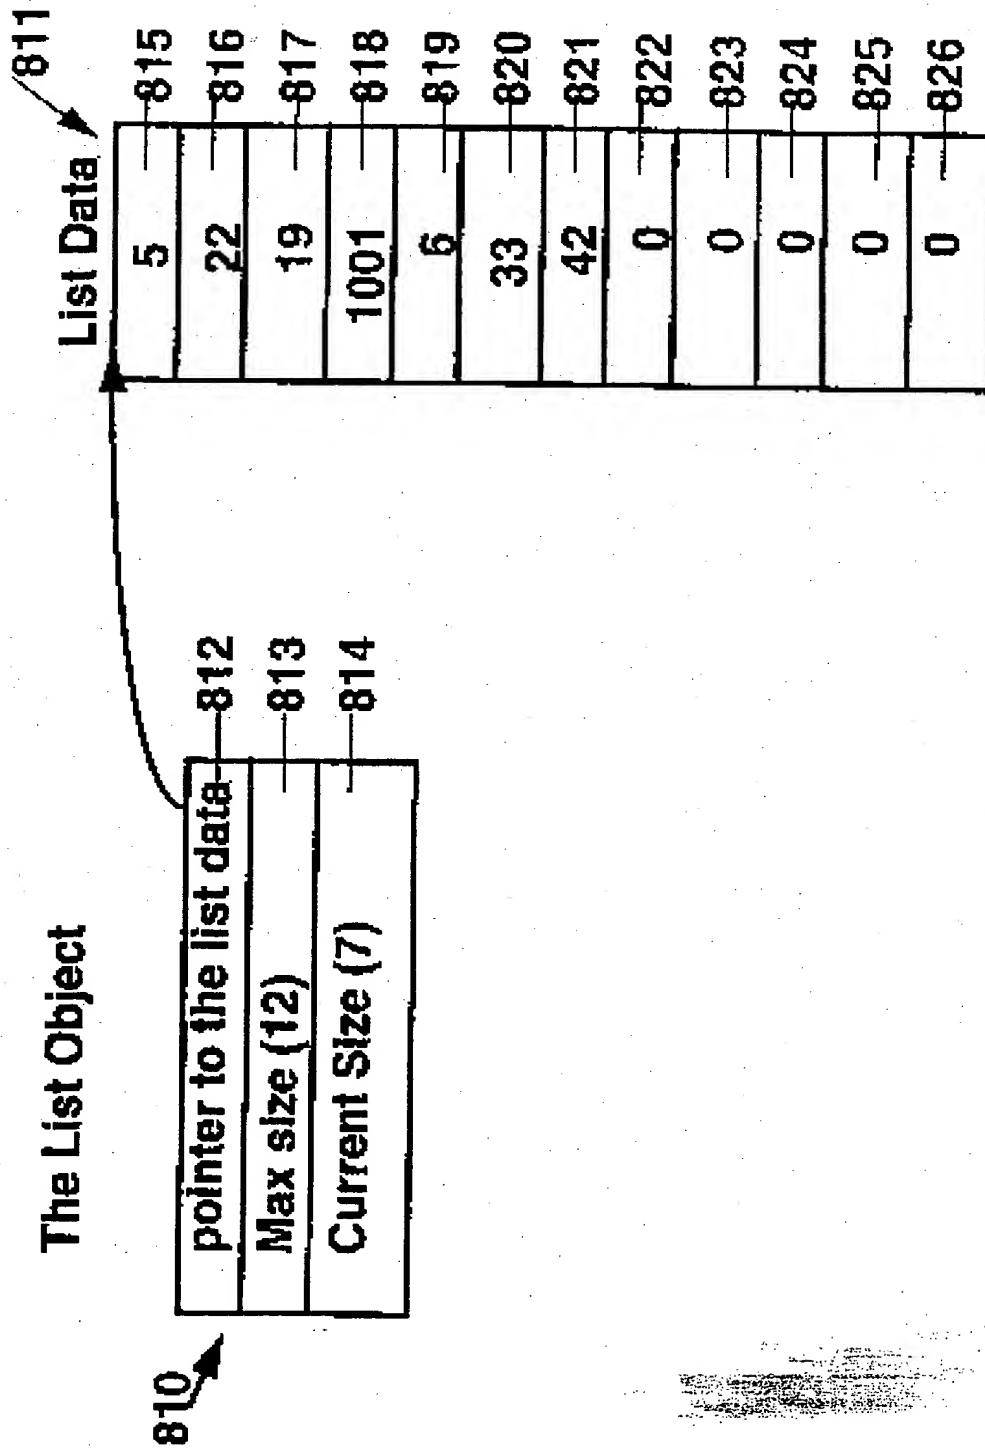


FIG. 53



57/64

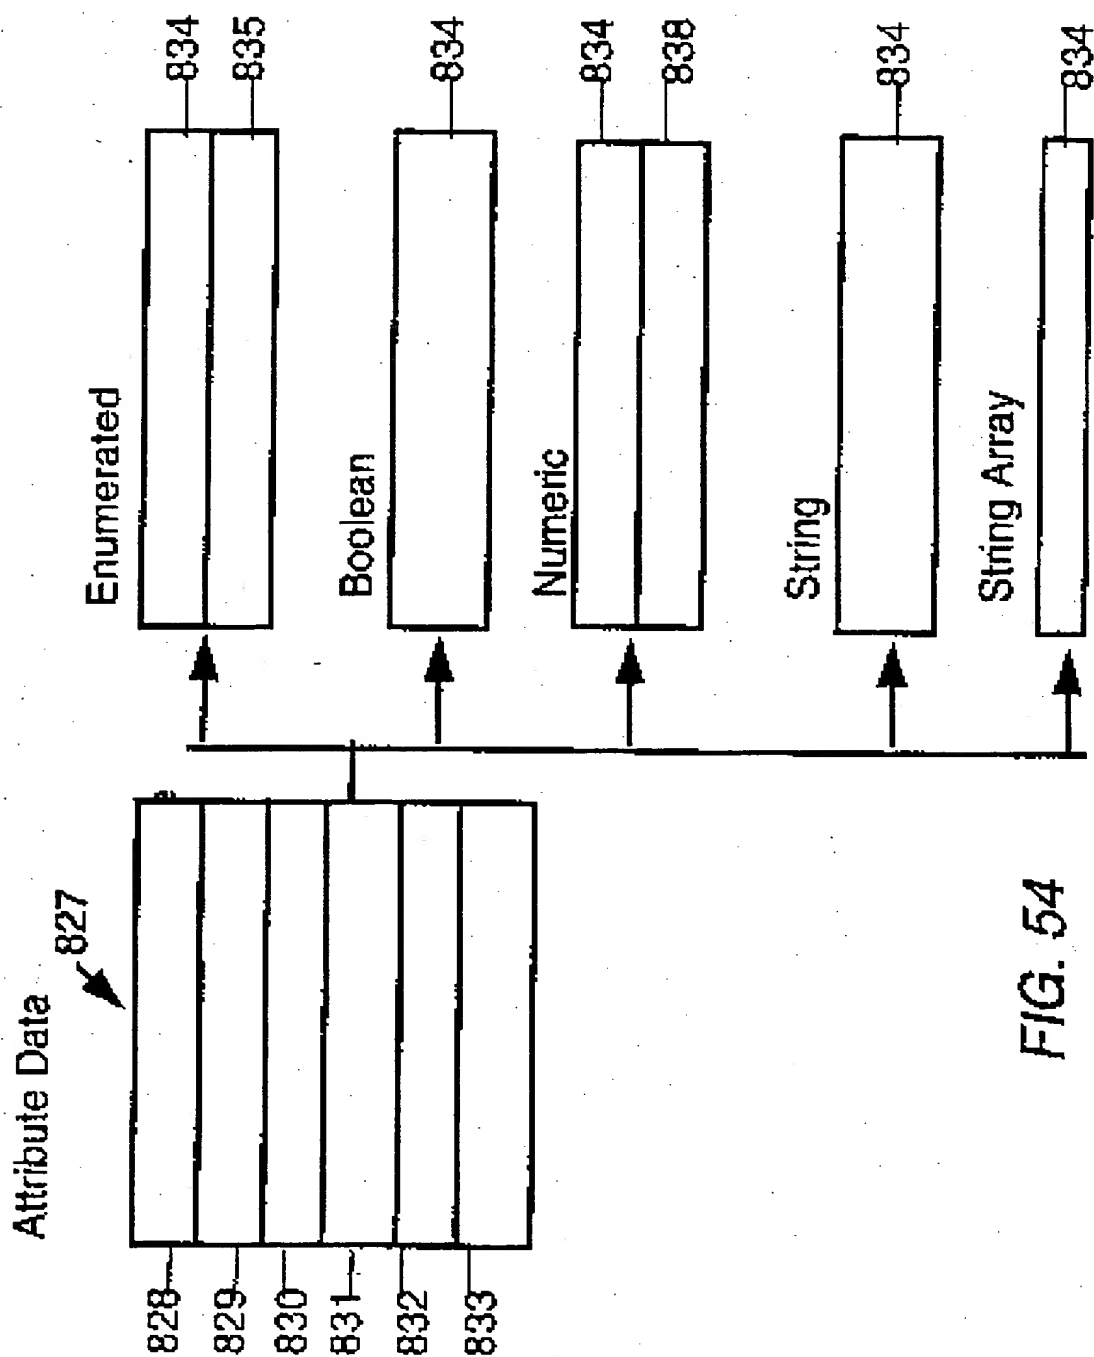


FIG. 54

58/64

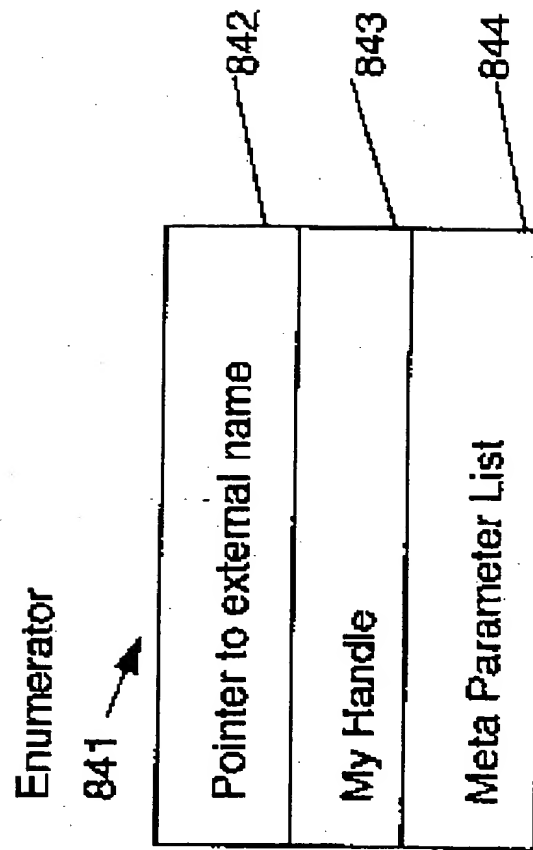


FIG. 55

59/64

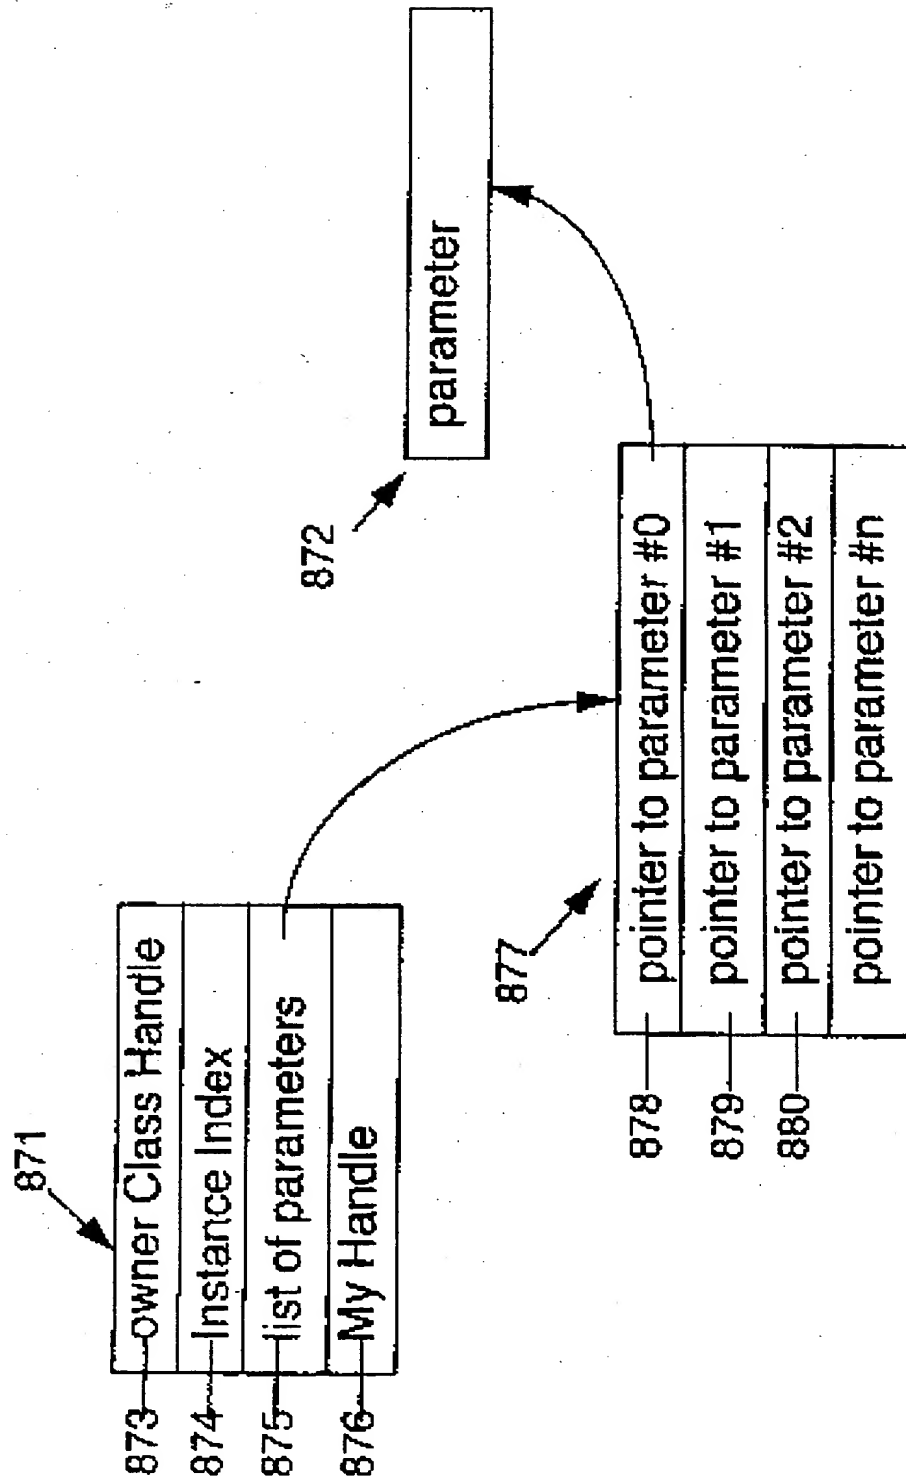


FIG. 56

60/64

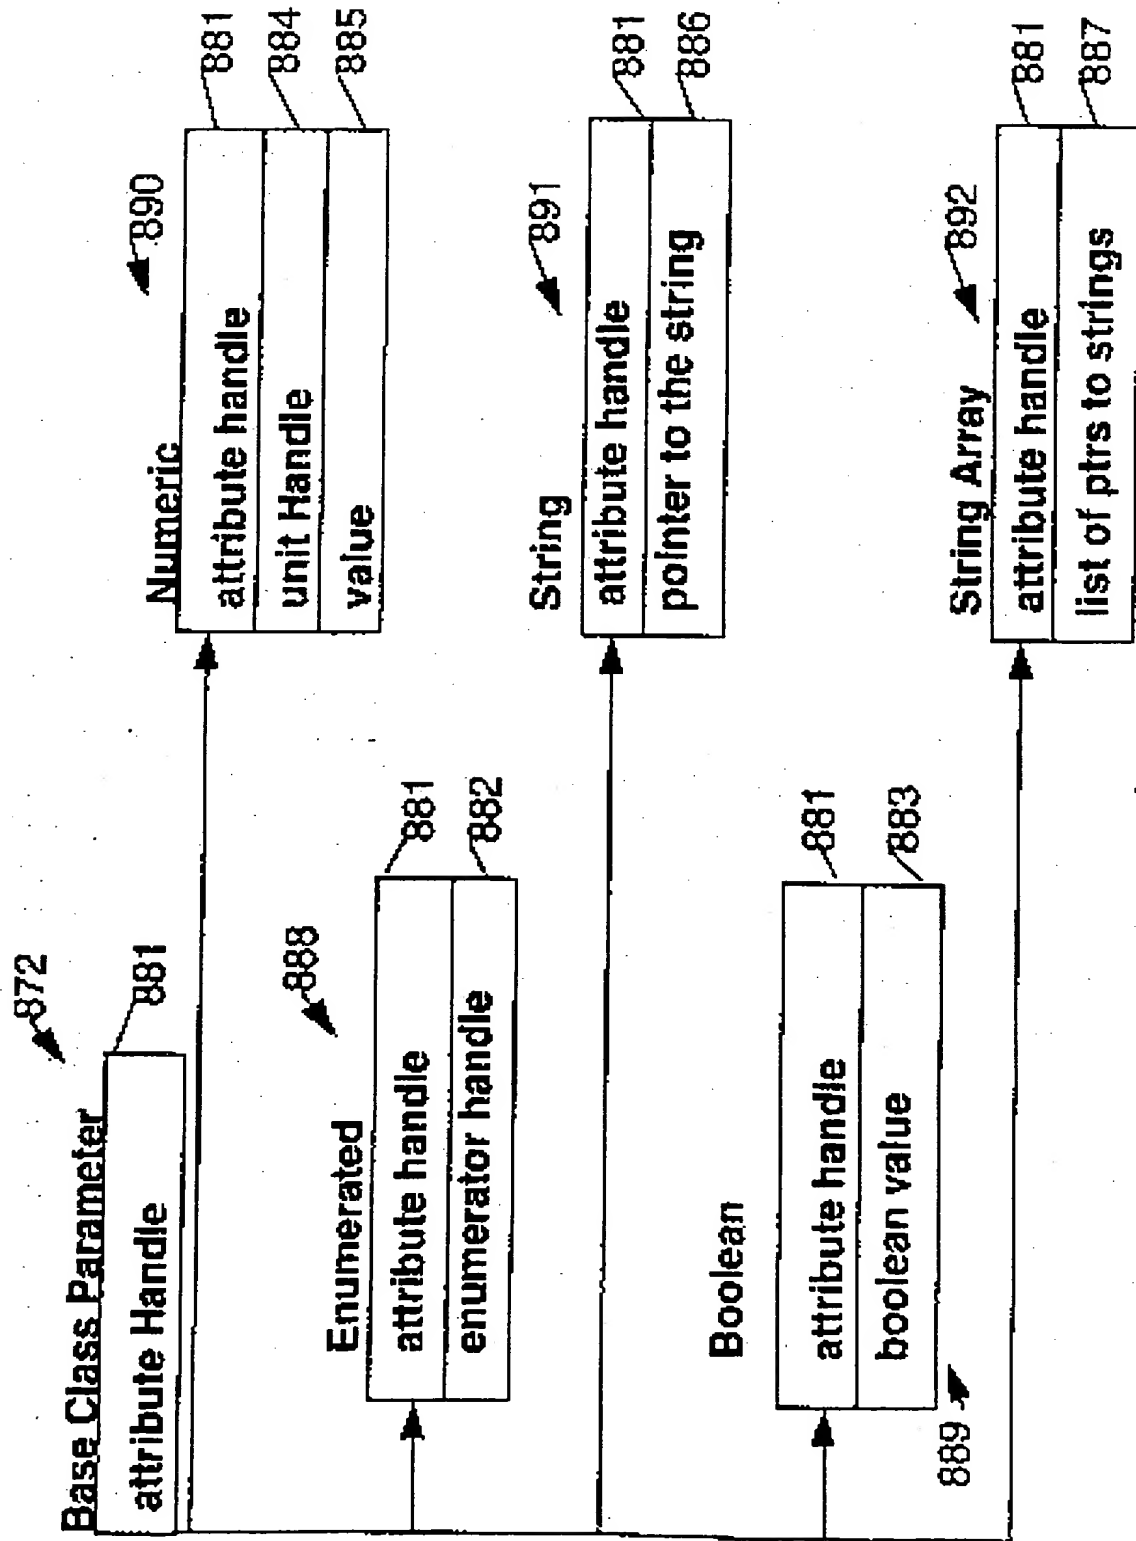


FIG. 57

65/64

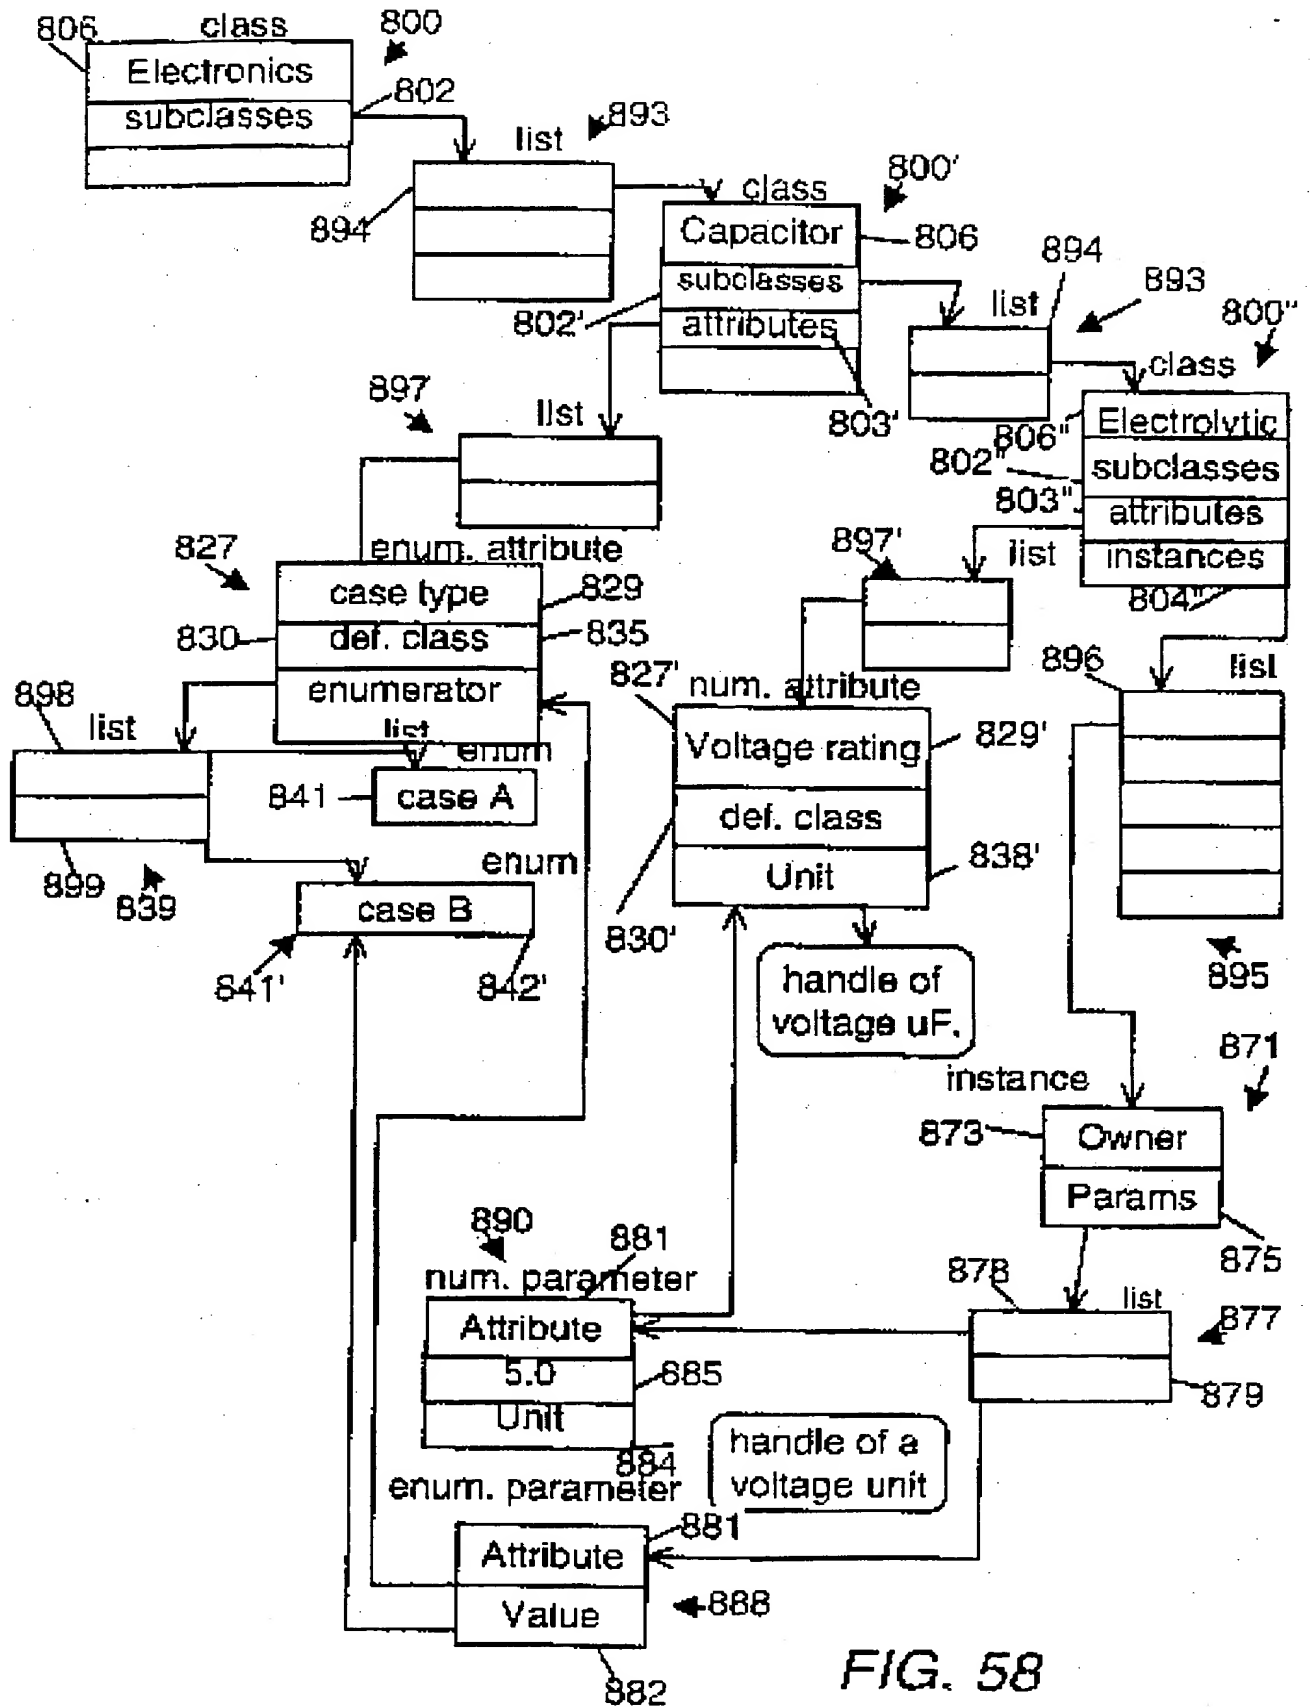


FIG. 58

62/64

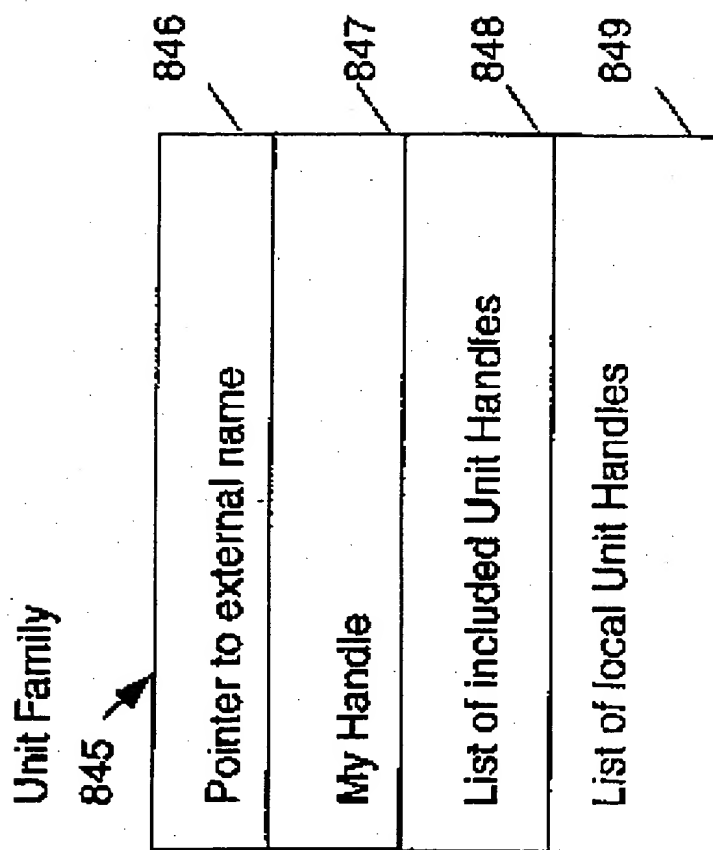


FIG. 59

63/64

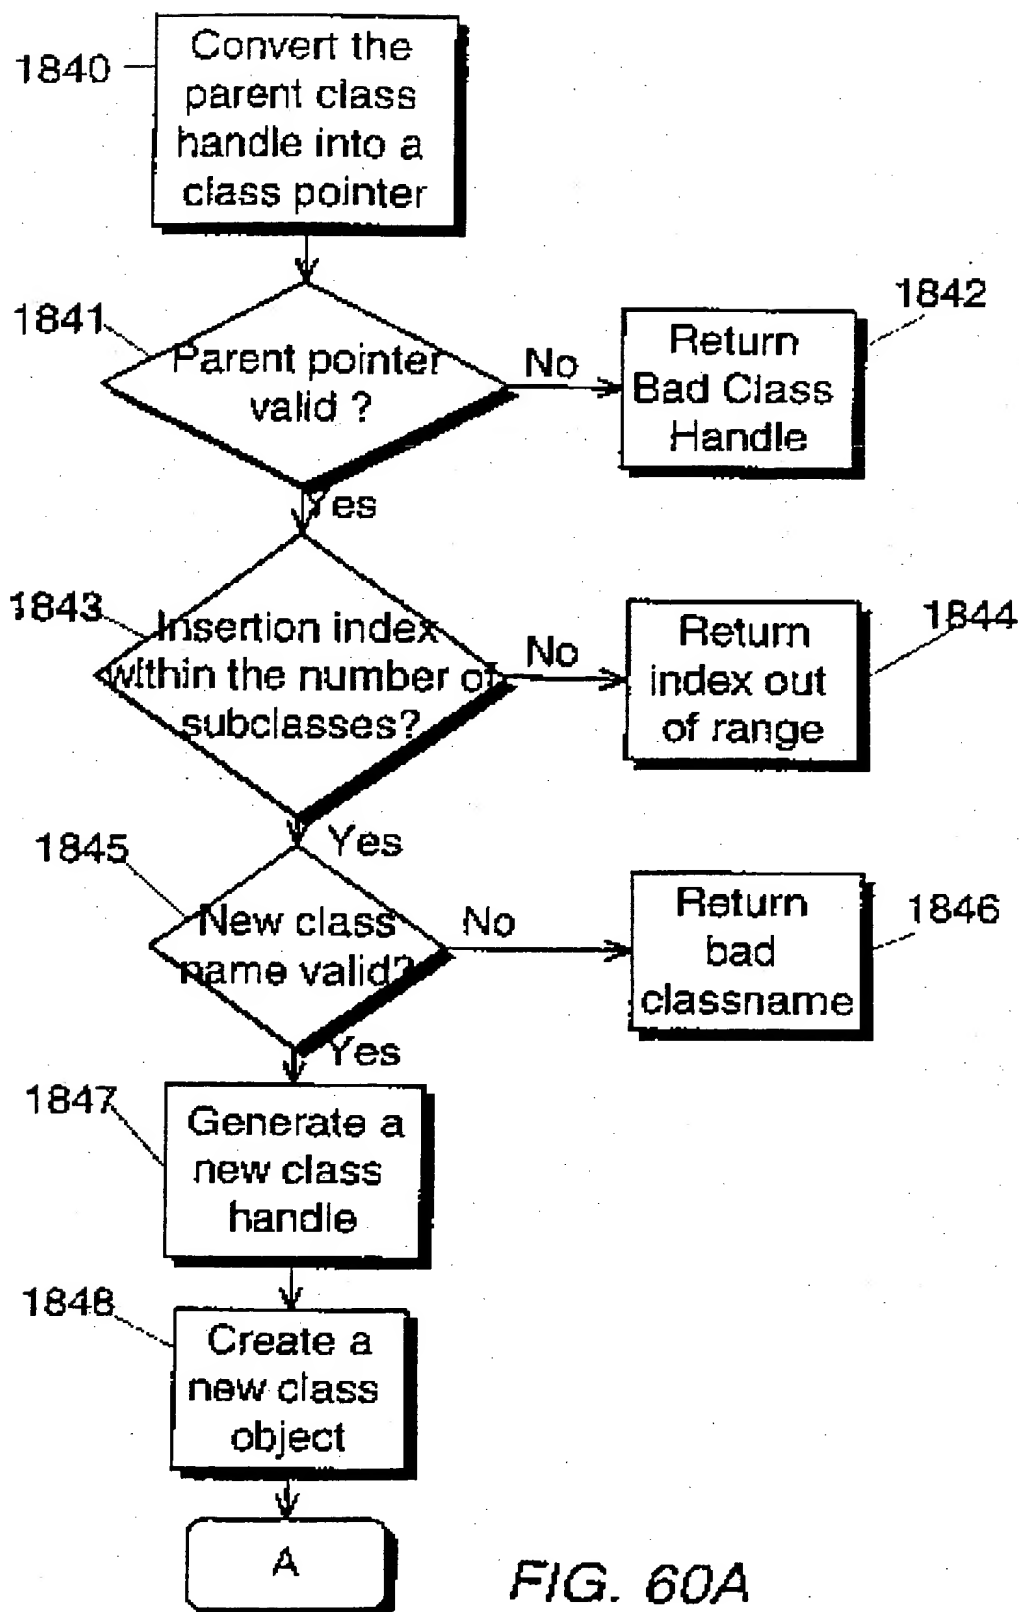


FIG. 60A

64/64

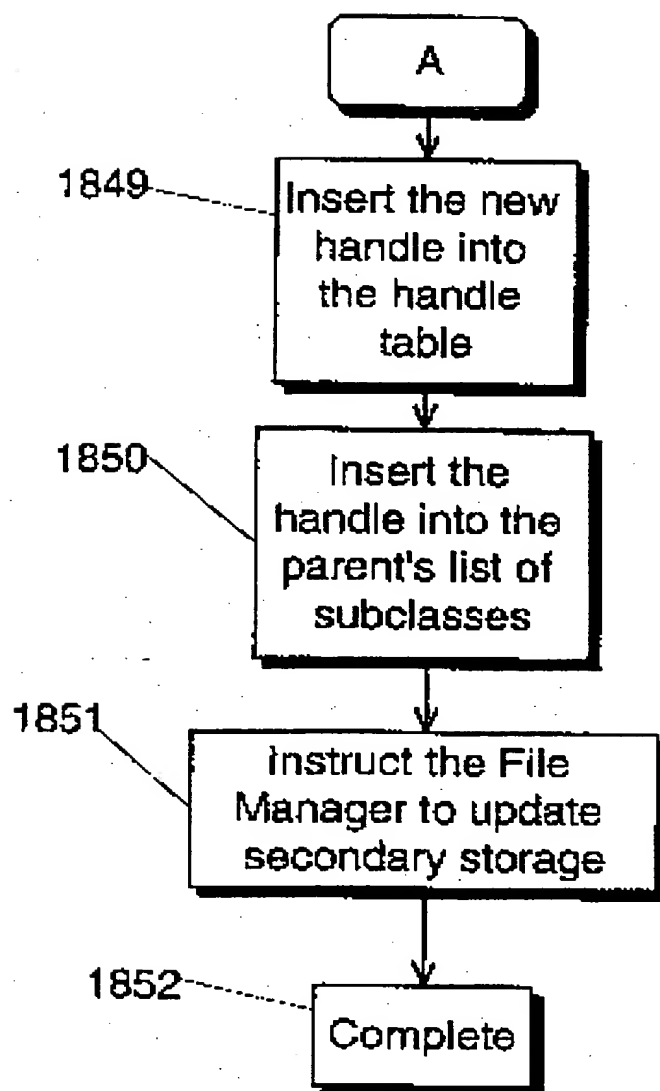


FIG. 60B






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F 17/30, 15/163</b>		A3	(11) International Publication Number: <b>WO 97/19415</b>
			(43) International Publication Date: 29 May 1997 (29.05.97)
(21) International Application Number: PCT/US96/18833		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 7 November 1996 (07.11.96)			
(30) Priority Data: 60/006,317 7 November 1995 (07.11.95) US			
(71) Applicant: CADIS, INC. [US/US]; 1909 26th Street, Boulder, CO 80302 (US).			
(72) Inventors: BEALL, Christopher, W.; 679 Cougar Drive, Boulder, CO 80302 (US). MOTYCKA, John, D.; 30130 Chestnut Drive, Evergreen, CO 80439 (US). PENDLETON, Samuel, S.; 976 West Dahlia Street, Louisville, CO 80027 (US). TERPENING, Brooke; 25221 Westridge Road, Golden, CO 80401 (US). NEAL, Michael; 1622 S. Riverbend Lane, Superior, CO 80027 (US). APPELBAUM, Matthew, A.; 200 Pawnee Drive, Boulder, CO 80303 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agents: LEACH, Sid et al.; Baker & Botts, L.L.P., 910 Louisiana, Houston, TX 77002 (US).		(88) Date of publication of the international search report: 31 July 1997 (31.07.97)	

(54) Title: SEARCH ENGINE FOR REMOTE OBJECT ORIENTED DATABASE MANAGEMENT SYSTEM

## (57) Abstract

A system is disclosed for remotely accessing database management systems (5130) and performing guided iterative queries of knowledge bases (110) over a communication circuit such as the Internet (5124). The system includes a Web browser (5120) having a Java™ runtime environment (4015), and executable content client (5121) that may be downloaded from a remote location (103). A Krakatoa proxy server (5128), socket (5021) and tunnel (5129) establish a mechanism for remote procedure calls through firewalls (5126) via an HTTP server (5127). Guardrail counts (750) are preferably displayed to the remote searcher to facilitate guided iterative queries of the remote knowledge base (110). A configurable graphical action region (700) is preferably provided to the remote searcher via a graphic user interface to provide powerful navigation and linking of diverse useful information which varies based upon contexts selected by the remote searcher.

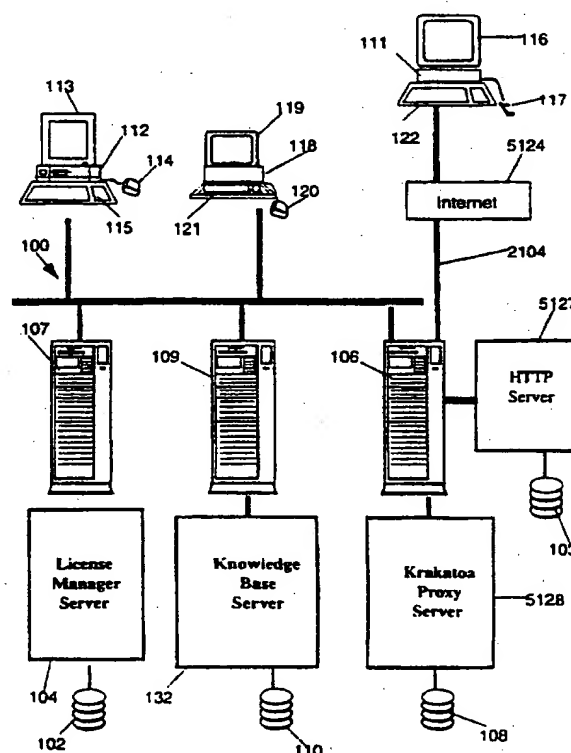

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US96/18833

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : G06F 17/30, 15/163

US CL : 395/680, 683, 200.03

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 395/680, 683, 200.03

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,560,005 A (HOOVER ET AL) 24 SEPTEMBER 1996 col. 11, lines 1-68, col. 12, lines 1-68, col. 13, lines 1-40	1-7
Y,P	US 5,530,852 A (MESKE, JR. ET AL.) 25 JUNE 1996 col. 5, lines 1-68, col. 6, lines 1-68, col. 10, lines 1-68, col.	1-7
Y	US 5,404,506 A (FUJISAWA ET AL) 04 APRIL 1995 col. 11, lines 1-68, col. 12, lines 1-68	1-7
Y	US 5,218,699 A (BRANDLE ET AL) 08 JUNE 1993 col. 5, lines 1-68, col. 6, lines 1-68, col. 7, lines 1-68	1-7

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"A" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 10 APRIL 1997	Date of mailing of the international search report 02 JUN 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer PETER STECHER <i>John Hill</i> Telephone No. (703) 305-4005

Form PCT/ISA/210 (second sheet)(July 1992)\*

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/18833

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,446,883 A (KIRKBRIDE ET AL) 29 AUGUST 1995 col. 3, lines 1-68, col. 4, lines 1-68, col. 5, lines 1-68	1-7
Y	US 5,398,336 A (TANTRY ET AL) 14 MARCH 1995 col 9, lines 1-68, col. 10, lines 1-68, col. 12, lines 1-68	1-7
Y	US 5,416,917 (ADAIR ET AL) 16 MAY 1995 col. 6, lines 1-68, col. 8, lines 1-68	1-7
Y	US 5,446,880 A (BALGEMAN ET AL) 29 AUGUST 1995 col. 5, lines 1-68, col. 7, lines 1-68	1-7